




Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 900 series, ultra-thick, reinforced radiant plate with central cut-out and high-power circular steel burner (28 MJ/h)
- Piezo ignition circular burner with flame failure device and pilot burner capable of reaching 500°C at the centre of the plate and 200°C around the edges
- Temperature regulation via variable power flame control
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Removable grease tray
- 24-month warranty

General Drawing:

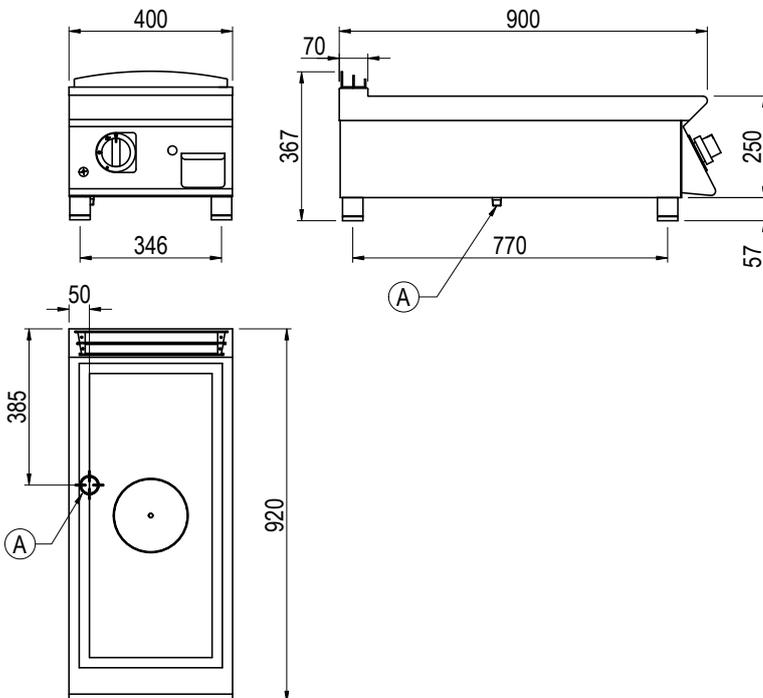

Specifications:

| | | |
|---|------------------|----------------------|
| Model | TG920TT | |
| W x D x H (mm) | 400 x 920 x 367 | |
| Weight | 60kg | |
| Plate Dimensions (mm) | 300 x 700 | |
| Packed Dimensions (mm) | 450 x 1025 x 570 | |
| Packed Weight (mm) | 67kg | |
| | Natural | Universal LPG |
| Gas Connection | 1/2" BSP | 1/2" BSP |
| Minimum Normal Test Gas Pressure | 1.3 kPa | 2.75 kPa |
| Maximum Normal Test Gas Pressure | 3.5 kPa | 3.5 kPa |
| Nominal Test Point Pressure | 1.0 kPa | 2.65 kPa |
| Total Nominal Gas Consumption | 28 MJ/h | 28 MJ/h |

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

A Gas Connection