

D8 | D8 PRO



D8

D8 PRO

Technical data		2 GROUP	3 GROUP
voltage	V	220-240 1N 50/60Hz*	
required amperage	A	20	32
power input	kW	4.5	6.9
steam boiler capacity	lit	7	10
steam boiler element	kW	3.5	5.5
pump power	kW	0.15 Std / 0.2 Pro	0.15 Std / 0.2 Pro
net weight	kg	85	95

*3 phase electrical conversion available at additional cost.

CONTACT US

info@sanremomachines.com.au
sanremomachines.com.au

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

SANREMO

COFFEE MACHINES

Features



DIGITAL SHOT TIMER

Allows you to accurately and reliably time coffee extraction



UP TO 7 PROGRAMMABLE DOSES

Choose between 5 or 7 programmable doses



ECO MODE

Smart energy management



AISI 316L STAINLESS STEEL "COOL TOUCH" STEAM WANDS

Anti-burning feature even in conditions of prolonged use, fitted with milk resistant high-performance steam terminals



AISI 316L STAINLESS STEEL BOILER

Exclusive Sanremo design ensures exceptional thermal stability and maximum resistance to oxidation and limescale



ADJUSTABLE BREW TEMPERATURE ACROSS ALL GROUP HEADS

Digitally adjust the brew temperature for all group heads



DIGITALLY PROGRAMMABLE BOILER TEMP.

Digitally adjust the boiler temperature to increase or decrease steam pressure



AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning

D8 Pro Features

THE ABOVE PLUS:



BARISTA LIGHTING

Allows efficient working in any condition of environmental lighting



ECO MODE PRO

Insulation and smart energy management



MIXED INFUSION HOT WATER TAP FOR TEA

Instantaneous mixing of fresh water and steam boiler



INSULATED BOILER

Steam boiler insulation to improve performance and recovery



COLOUR LCDs

Multi-coloured LCDs per group, to show mls, temperature and shot time



HIGH PERFORMANCE PUMP 200L/H

Pressure stability in situations of prolonged use of multiple groups even in high volume venues



ADJUSTABLE BREW TEMPERATURE FOR EACH GROUP HEAD

Digitally adjust the brew temperature independently for each group head

Optional Features




IOT CONNECTIVITY

Wifi board to give live coffee quality telemetry and service updates from the cloud

D8|D8 PRO

SANREMO
COFFEE MACHINES

Versions and Dimensions

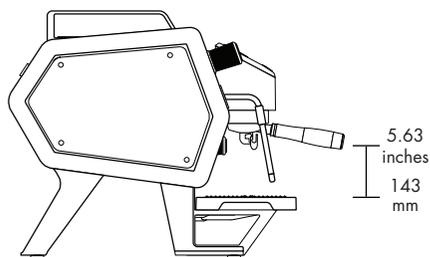


19.5 inches
496 mm

5.63 inches
143 mm


21.8 inches / 554mm

2 GROUP	3 GROUP
2 steam taps	2 steam taps
1 water tap	1 water tap
1 one-cup portafilter	1 one-cup portafilter
2 two-cup portafilters	3 two-cup portafilters

PUSH-BUTTON PANEL OF D8 AND D8 PRO

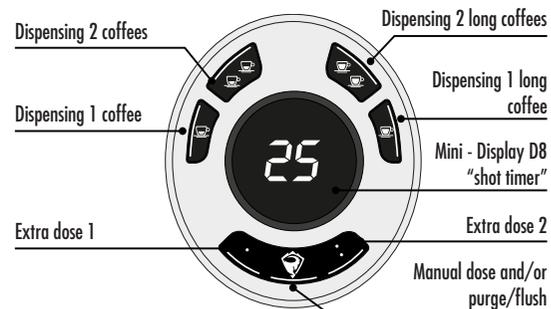


2 GROUP



31.7 inches / 807mm


3 GROUP

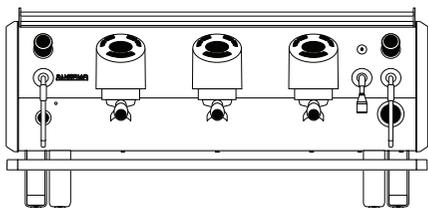

40.8 inches / 1037mm

D8 PRO DISPLAY FUNCTIONS

- WiFi connection
- Warning - indicates maintenance required
- User menu navigation
- Cup heating plate ON
- Pressure display
- Group washing
- Eco Pro mode
- Boiler level OK
- Alarm
- Technical menu navigation - service
- Water dispensing
- Temperature display
- Shot timer
- Dispensed coffee quantity display
- Hourly programming active



Colours



**SINGLE
BOILER
GAME
CHANGER**



D8

D8 is the starting position of the black Queen on the chessboard. D8 has been designed to emulate the queen of chess: an extremely powerful & dynamic tool, the best ally to develop a winning strategy for your coffee business.

All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.