

W8 TOP

Vacuum pack machines



W8 TOP 40 DX
with inert gas and AOR optionals



W8 TOP 50 DX



- Practical and intuitive touch screen display (see pag.84)
- Electronic control system with pressure sensor for fast and precise processing
- Adjustable automatic vacuum percentage: 50-100%
- Dedicated programs for liquids and marinating
- 10 different settings savable to preference
- 6 selectable languages
- Set up sealing, vacuum, and gas time on a 1-10 sec scale
- Display of vacuum percentage and time to countdown
- Scheduled management of maintenance operations to ensure longer-lasting life oil and filter change warning light
- Thermal pump guard
- Oil preheat and cleaning cycle
- Total rev counter
- Pump meter
- Built-in Wi-Fi card which allows careful management of after-sales service at a distance
- 3-year pump warranty (for machines connected via Wi-Fi)
- Fully manageable via APP that is easy and intuitive and can be downloaded free-of-charge from official stores

Optionals:

- Inert gas system (MAP)
- Automatic thermal printer by date, time and packing specifications
- A.O.R. Automatic Oil Replacement - Available only on W8 TOP 40 and 50
- SanO3 - Patented - Available only on W8 TOP 40 and 50
- External vacuum
- Seal bar with Cut-Off Wire

Specifications

Plug & Cord: NEMA 5-20 P



Certified to UL Standard 963 and NSF Standard 169
 Certified to CSA Standard C22.2



SANO₃
 AUTOMATIC OZONE SANITIZATION



Optional - Patented - is an integrated and automated sanitizing system that works with an ozone generating cell to deeply sanitize the chamber and all the air pipes reaching the best result where other sanitizing procedures cannot get. Available only on W8 TOP 40, 50



AOR[®]
 AUTOMATIC OIL REPLACEMENT

Automatic Oil Replacement, an exclusive patent by Sirman, always in pole position for vacuum and sous vide technology. The machine automatically manages the oil changing, preserving the pump from damage and thus extending the warranty of the pump to 3 years (for machines connected via Wi-Fi).



Thermal label printer - option



Optional adhesive paper for built-in printer



Standard support for vacuum bags with liquids



Easy access for oil change and service



W8 50 DX DB
1 left and 1 right seal bars design



W8 70 DX TB
3 seal bars design



W8 Top 50 DX G
with inert gas flush ready



W8 Top 40-50 DX G
Option inert gas and A.O.R.



mod. W8 30 - 40 - 50
Optional Seal bar with Cut-Off Wire

Optional - External vacuum: hose+GN container+lid



Reinforced Gastronorm Containers and s/steel Lids




Reinforced Gastronorm Containers and Lids


Optionals		W8 Top 30 DX	W8 Top 40 DX	W8 Top 50 DX DB	W8 Top 50 DX
Bag size	Capacity	Bags/cycle	Bags/cycle	Bags/cycle	Bags/cycle
5" x 7"	.5 pt - .5 lb	2	3	6	4
6" x 8"	.5 pt - .5 lb	2	2	4	3
8" x 12"	1 qt - 2 lb	1	2	4	2
10" x 12"	1.5 qt - 3 lb	1	1	2	2
10" x 15"	3 qt - 6 lb	1	1	2	2
12" x 14"	1 gal - 8 lb	1	1	2	1
12" x 16"	1 gal - 8 lb	1	1	2	1
12" x 18"	1.25 gal - 10 lb	1	1	2	1
14" x 20"	1.75 gal - 14 lb	--	1	2	1
16" x 22"	2.5 gal - 20 lb	--	1	2	1




W8 TOP 70 DX TB

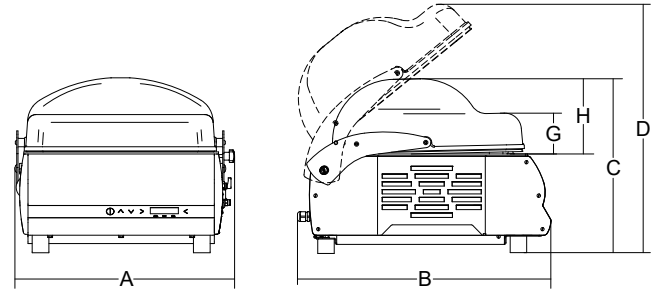


W8 30 - 40 - 50



W8 50 DB



W8 70 TB



	Electrical	Seal bar	Pump	Chamber dimensions									Net weight	Shipping	Gross weight
		inch.	m ³ /h	inch.	A	B	C	D	E	F	G	H	lbs.	inch.	lbs.
W8 Top 30 DX	110-120V, 11.3A, 1250W	12 ^{1/4} "	9	13 ^{3/8} "x14 ^{3/16} "x6 ^{3/4} "	16"	20 ^{3/4} "	16"	23 ^{1/8} "	13 ^{1/8} "	13 ^{1/8} "	3 ^{47/64} "	6 ^{11/16} "	83	29"x23"x31"	105
W8 Top 40 DX	110-120V, 8.7A, 1150W	16 ^{1/8} "	14	17"x16 ^{1/8} "x7 ^{1/8} "	19 ^{1/2} "	23"	16 ^{5/8} "	24 ^{3/4} "	15 ^{3/8} "	17"	3 ^{47/64} "	7 ^{3/32} "	123	30"x26"x31"	145
W8 Top 40 DX	110-120V, 11.3A, 960W	16 ^{1/8} "	24	17"x16 ^{1/8} "x7 ^{1/8} "	19 ^{1/2} "	23"	16 ^{5/8} "	24 ^{3/4} "	15 ^{3/8} "	17"	3 ^{47/64} "	7 ^{3/32} "	123	30"x26"x31"	145
W8 Top 50 DX	110-120V, 13.8A, 1000W	20 ^{1/16} "	24	21 ^{1/2} "x18 ^{1/8} "x8 ^{1/4} "	24"	25 ^{1/2} "	16 ^{5/8} "	23 ^{7/8} "	16 ^{7/8} "	21 ^{1/4} "	3 ^{35/64} "	8 ^{17/64} "	155	34"x34"x30"	190
W8 Top 50 DX DB (1 LEFT 1 RIGHT SEAL BARS)	110-120V, 13.8A, 1000W	2x16 ^{1/8} "	24	21 ^{1/2} "x18 ^{1/8} "x8 ^{1/4} "	24"	25 ^{1/2} "	16 ^{5/8} "	23 ^{7/8} "	16 ^{7/8} "	21 ^{1/4} "	3 ^{35/64} "	8 ^{17/64} "	165	34"x34"x30"	195
W8 Top 70 DX TB (3 SEAL BARS)	220-240V, 3-ph, +/- 10% 7.3A, 1750W	1x25 ^{1/4} " 2x16 ^{1/8} "	48	30 ^{3/4} "x19 ^{1/3} "x8 ^{1/4} "	34 ^{1/2} "	26 ^{1/2} "	44 ^{5/8} "	53 ^{7/8} "	16 ^{3/4} "	26"	3 ^{47/64} "	7 ^{7/8} "	370	32"x48"x53"	282