

SPH515AU

Family	Dishwasher
Subfamily	Hoodtype
Type	Hoodtype dishwasher
Crockery	Crockery; Glasses; Cutlery; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Electronic
Rinse pump	HTR system
Wash pump	Standard
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz



Distribution

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
-------------------	---

Aesthetics

Serie	Easyline	Led color	White
--------------	----------	------------------	-------

Technical Features

Trays washing option	Yes	Max water hardness	12°f - 7°dH
Trays number	7 x GN 1/1 (530 x 325 mm)	Water inlet	100-1000 kPa
Water consumption per cycle	3,2 l	Detergent load	Yes, manual
Wash temperature (min-max)	58 °C	Rinse load	Yes, manual
Rinse temperature (min-max)	85 °C	Usable load height	470 mm
Minimum water consumption per cycle	3,2 l	Maximum height with open hood	2138 mm
Water inlet	8°C	Product dimensions WxDxH	634x831x1523 mm

Max. inlet temperature 60°C

Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Easyline hoodtype
Maximum basket/hour	60
Maximum dishes/hour	1080
Maximum glasses/hour	2160

Electrical Connection

Tank heating element power	2200 W	Default connection	9700 W
Boiler heating element power	9000 W	Electrical connection option	230 V~ / 16 A / 3,7 kW / 50 Hz; 230V~ / 26 A / 9,7 kW / 50 Hz ; 230 V~ / 30 A / 6,7 kW / 50 Hz
Wash pump power	700 W		

Interface

Display	4 digit	Cycle progress alert	Yes
Number of buttons	5	Manual diagnostic	Yes
On/Off button	Yes		

Construction

Tank Construction	Deep drawn Double-skin hood	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Tank capacity	14 l
Back panel	Prepainted	Boiler capacity	10 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Boiler type	Artmosferic boiler
Lower washing system	One washing and one split rinse spray arms, stainless steel	Rumorosità	Lpa 59,9 dBA
Tank filter	Stainless steel	Protection class	IPX4
Hood elevation system	Manual	Adjustable feet	Yes
		Drain max. height	1000 mm

Accessories Included


Dish basket	PB50D01	Water supply pipe	In acciaio Watermark
Cutlery basket	PHOOS02	Drain pipe	Yes - 2m
Flat basket	PB50G01		

Equipments










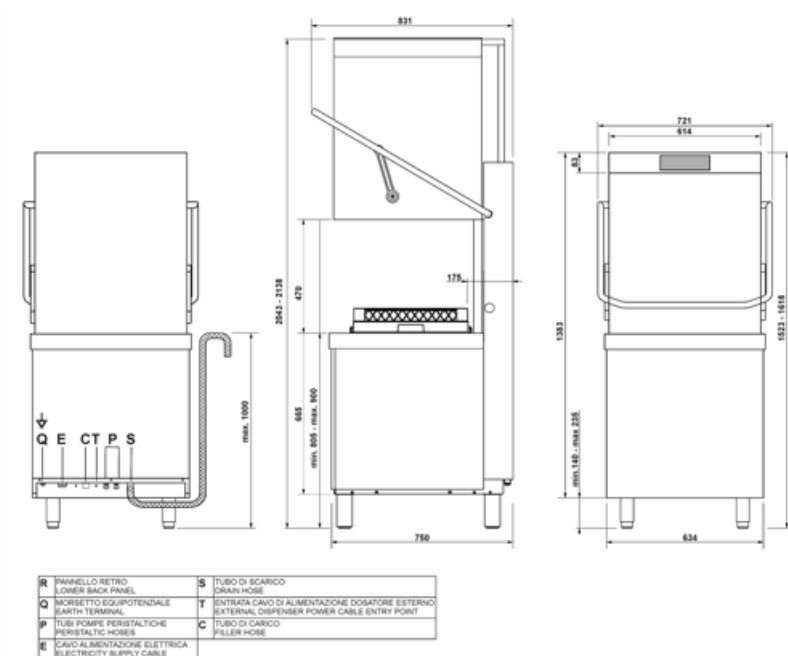










Drain pump	Yes	Option for auto daily switch on	Yes, default OFF
Peristaltic detergent dispenser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid dispenser	Yes, electronic control	Break tank	Yes
Default chemicals dosing unit of measure	gr/lt	Partial renewal of water in the tank and built-in drain pump	Yes
Rinse boiler Thermostop system	Yes - default	Water supply pipe diameter	16 mm
Wash tank Thermostop system	Yes	Drain supply pipe diameter	21,5 mm
Wash pump soft start system	Yes	Peristaltic detergent doser	Yes, manual
Stand-by system	Yes	Peristaltic detergent doser	Yes, manual

Logistic Information

Width packed product	770 mm	Packed product dimensions	1700x770x900 mm
Depth packed product	900 mm	Net weight	122.000 kg
Height packed product	1700 mm	Gross weight (kg)	141.000 kg



Compatible Accessories

	<p>KITSONLIV Probe level kit</p>		<p>PB50D01 Basket made of polypropylene for 18 plates 500x500</p>
	<p>PB50G02 Universal basket in polypropylene 500x500</p>		<p>PB50T01 Polypropylene basket for 8 trays GN 1/1 h 40 mm</p>
	<p>PHOGR5 Glass basket for 500x500 mm glasswashers</p>		<p>PHOOS01 Single basket in polypropylene for cutlery</p>
	<p>PHOOS02 Basket in polypropylene for cutlery with 6 compartments</p>		<p>PHOOS03 Basket in polypropylene with 6 compartment for cutlery for Capote</p>
	<p>PHOOS04 4 compartments polypropylene basket for cutlery</p>		<p>WB50D01 Wire basket for 18 dishes and trays 500x500</p>
	<p>WB50G01 Universal wire basket with flat bottom 500x500</p>		<p>WB50G02 Wire basket for glasses with inclined bottom 500x500</p>
	<p>WB50G03 Wire basket for glasses with inclined bottom 500x500</p>		<p>WB50G04 Wire basket for glasses with inclined bottom 500x500</p>
	<p>WB50T02 Wire basket for 5 trays 600x500</p>		<p>WH00S01 Wire insert for 12 small dishes</p>
	<p>WT51200SHL Entry table left side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm</p>		<p>WT51200SHR Entry table right side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm</p>
	<p>WT51200SL Entry table left side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm</p>		<p>WT51200SR Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm</p>

**WT5700SR**

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm

**WTX51200**

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 1200x560x821, 5 mm

**WTX51200R**

Exit right side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm

**WTX5700L**

Exit table left side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm

**WTX6700F**

Universal table for either side, with front coupling and lower shelf, dim. (WxDxH) 705x660x821, 5 mm

**WTC5R**

Right side closure kit for Hoodtype

**WTX51200L**

Exit left side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm

**WTX5700**

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 700x560x821, 5 mm.

**WTX5700R**

Exit table right side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm

Symbols glossary



...



...



...



MAX. USABLE HEIGHT 470mm



5 STAGE FILTER

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Double-skin hood

Thermal and acoustic insulation guaranteed

The double-skin design of the hood is engineered to optimise energy efficiency by minimising heat dispersion and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.