

# SFNNXA Commercial Washer



## 10KG FRONT LOAD ELECTRONIC COIN OPERATED WASHER

### Features and Benefits

- Low water consumption of only 44.3 litres per wash, with full wash completed in 30 minutes.
- Energy saving 'High Speed Extract' spin cycle of 1,200 rpm producing 'G' forces in excess of 440 for greater water removal, resulting in reduced drying times and associated energy savings.
- Soft mount machine requires no bolting down to secure.
- Available in Stainless Steel (SFNNXA-SS)
- Multiple payment options - Card, Token or Electronic coin mechanism will accept 20c, \$1, \$2 or a token while rejecting foreign currency, with the vend price adjustable in seconds with no hardware changes required.

### SPECIFICATIONS

| DIMENSIONS    |                                   |
|---------------|-----------------------------------|
| CAPACITY      | 10 kg                             |
| WIDTH         | 683 mm                            |
| DEPTH         | 796 mm                            |
| HEIGHT        | 1,126 mm                          |
| DRUM VOLUME   | 96.8 Litres                       |
| NET WEIGHT    | 122 kg                            |
| OPERATION     |                                   |
| CYCLES        | 9 cycles, 3 soil levels           |
| CYCLE LIGHTS  | Yes, digital display              |
| CYCLE TIME    | 23 - 30 Min                       |
| CONTROLS      | Quantum gold controller           |
| ACTIVATION    | Card, Token, Electronic coin drop |
| WATER TEMP    | Hot, warm or cold                 |
| MOTOR         | 1.0 Hp, variable speed            |
| SPIN SPEED    | 500 - 1,200 Rpm, variable speed   |
| WATER USE     | 44.3 Litres / wash                |
| CONSTRUCTION  |                                   |
| INNER BOWL    | Stainless steel                   |
| OUTER BOWL    | Stainless steel                   |
| OUTER CABINET | Steel                             |



# SFNNXA Commercial Washer



## TECHNICAL SPECIFICATIONS

### UTILITIES

SINGLE PHASE 240 V 50 HZ

10 AMP CIRCUIT-BREAKER REQUIRED

1.8 M POWER LEAD

HOT AND COLD WATER SUPPLY

1.2 M HOT AND COLD WATER HOSES SUPPLIED

WATER SUPPLY HOSE TAP **ENDS** 3/4 BSP THREADS

MAX HOT WATER CONSUMPTION 18.9 L / CYCLE

MAX WATER CONSUMPTION 44.3L / CYCLE

MAX POWER DRAW MOTOR 670W / HOUR

DRAIN: 600 - 914 MM UPSTAND, 50 MM DIAMETER

WATER SUPPLY PRESSURE BETWEEN MAX 820 KPA/MIN 140 KPA


### SHIPPING DIMENSIONS

|        |          |
|--------|----------|
| WEIGHT | 126 kg   |
| HEIGHT | 1,130 mm |
| WIDTH  | 864 mm   |
| DEPTH  | 762 mm   |
| CUBIC  | 0.74     |

## EQUIPMENT DIMENSIONS

### EQUIPMENT DIMENSIONS

|                      |                     |
|----------------------|---------------------|
| A                    | 610 mm (24 in.)     |
| B                    | 1126 mm (44.34 in.) |
| C                    | 813 mm (32 in.)     |
| D                    | 938 mm (36.94 in.)  |
| E                    | 371 mm (14.6 in.)   |
| F                    | 683 mm (26.875 in.) |
| G                    | 52 mm (13.1 in.)    |
| H                    | 704 mm (27.73 in.)  |
| I - WITH DOOR CLOSED | 40 mm (1.59 in.)    |
| J                    | 333 mm (13.1 in.)   |

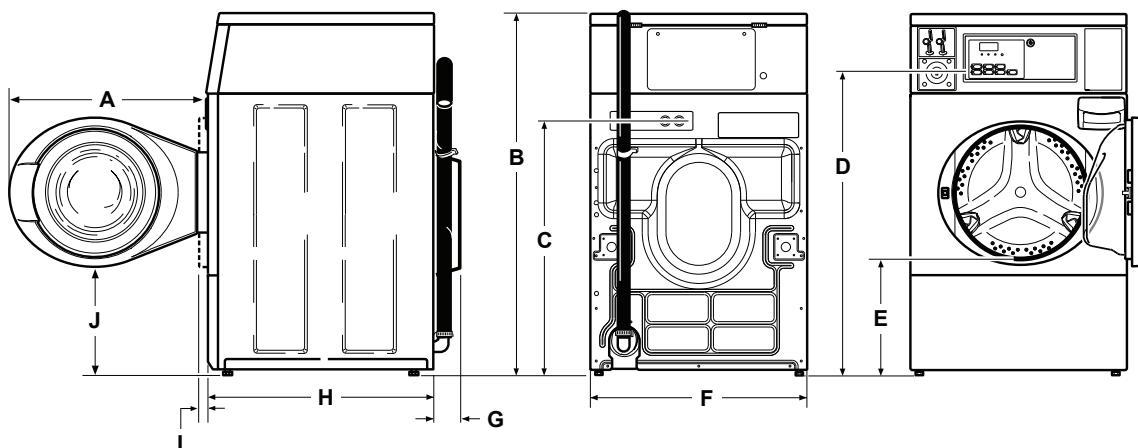

Speed Queen Equipment Sales  
26 Theobald Street, Thornbury, VIC 3071  
Ph: (03) 9495 1300  
Ph: 1300 945 414  
W: [www.speedqueensales.com.au](http://www.speedqueensales.com.au)  
E: [info@speedqueensales.com.au](mailto:info@speedqueensales.com.au)  
Servicing Victoria & Tasmania.