

STGNXA Commercial Washer/Dryer



10 KG FRONT LOAD WASHER AND STACKED GAS DRYER

Features and Benefits

- Low water consumption of only 44.3 litres per wash, with full wash completed in 30 minutes.
- Energy saving 'High Speed Extract' spin cycle of 1,200 rpm producing 'G' forces in excess of 440 for greater water removal, resulting in reduced drying times and associated energy savings.
- 100% front service gas dryer for fast, efficient drying.
- Electronic coin mechanism will accept \$1, \$2 or a token while rejecting foreign currency, with the vend price adjustable in seconds with no hardware changes required.

SPECIFICATIONS

DIMENSIONS	
CAPACITY	10 kg washer, 10 kg dryer
WIDTH	683 mm
DEPTH	704 mm
HEIGHT	1,986 mm
NET WEIGHT	177 kg
OPERATION	
CYCLES	9 cycles, 3 soil levels
CYCLE LIGHTS	Yes
CYCLE TIME	26 - 30 min
CONTROLS	Touch push button controls
ACTIVATION	Card, Token, Electronic coin drop
WATER TEMPERATURE	Cold, Warm, Hot
MOTOR WASHER	1 hp, variable speed
SPIN SPEED WASHER	500 - 1,200 rpm, variable speed
WATER USE WASHER	44.3 litres / wash
HEAT INPUT DRYER	27 mj natural gas or LPG
HEAT INPUT (DRYER)	
INNER BOWL WASHER	Stainless steel
OUTER BOWL WASHER	Stainless steel
OUTER CASING	Steel
DRUM DRYER	Galvanized steel



STGNXA Commercial Washer/Dryer



TECHNICAL SPECIFICATIONS

UTILITIES WASHER

10 AMP SINGLE PHASE 240 V 50 HZ

10 AMP CIRCUIT BREAKER

1.8M POWER LEAD

HOT AND COLD WATER SUPPLY

1.2 M HOT AND COLD WATER HOSES SUPPLIED

WATER SUPPLY HOSE TAP ENDS 3/4 BSP THREADS

MAX HOT WATER CONSUMPTION 18.9 LITRE / CYCLE

MAX WATER CONSUMPTION 44.3 LITRE / CYCLE

MAX POWER DRAW 670 W / HR

WATER SUPPLY PRESSURE BETWEEN 20 - 120 PSI

DRAIN: 610 - 914 MM UPSTAND, 50 MM DIAMETER

UTILITIES DRYER

10 AMP SINGLE PHASE 240 V 50 Hz

10 AMP Breaker required

1.8 M FLEX Power Cord

FLUE DIAMETER 102 mm (4 in)

AIR FLOW 85 litres / second

MAX POWER DRAW 4,000 w / hour

OPTIONAL Right or left side venting

SHIPPING DIMENSIONS

WEIGHT 189 kg


HEIGHT 2,032 mm

WIDTH 762 mm

DEPTH 864 mm

1.33 m³

A *1678 mm [66.06 in.]	B *1447 mm [56.97 in.]	C 597 mm [23.5 in.]
D 213 mm [8.375 in.]	E 610 mm [24 in.]	F 203 mm [8 in.]
G 391 mm [15.4 in.]	H 59 mm [2.3 in.]	I *938 mm [36.9 in.]
J *371 mm [14.6 in.]	K *1140 mm [44.87 in.]	L *813 mm [32 in.]
M 683 mm [26.875 in.]	N *1986 mm [78.17 in.]	O *1184 mm [46.62 in.]
P 52 mm [2.04 in.]	Q 704 mm [27.73 in.]	R (with door closed) 38 mm [1.5 in.]
S *333 mm [13.1 in.]		

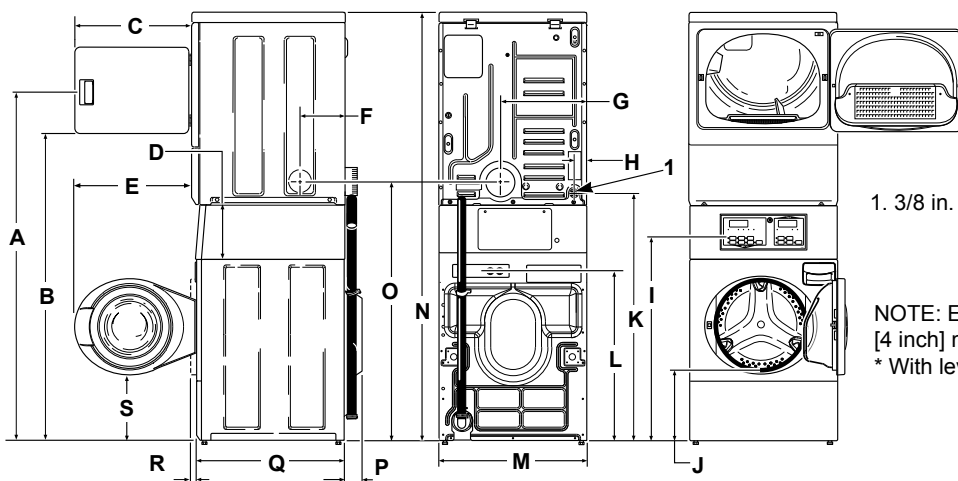

1. 3/8 in. NPT Gas Connection

NOTE: Exhaust openings are 102 mm [4 inch] metal ducting.

* With leveling legs turned into base.



Speed Queen Equipment Sales
 26 Theobald Street, Thornbury, VIC 3071
 Ph: (03) 9495 1300
 Ph: 1300 945 414
 W: www.speedqueensales.com.au
 E: info@speedqueensales.com.au
 Servicing Victoria & Tasmania