

SWNMN2 Commercial Washer




9 KG PUSH TO START TOP LOAD WASHER

Features and Benefits

- Durable, easy to use controls for low maintenance costs, well suited to high volume multiple operator applications.
- Super robust steel control consol, well suited to heavy handed operators.
- Super tough solid steel cabinet, lid and control panel.
- Stainless steel bowl and all metal transmission gears.

SPECIFICATIONS

DIMENSIONS	
CAPACITY	9 kg
WIDTH	651 mm
DEPTH	711 mm
HEIGHT	1114 mm
DRUM VOLUME	92.3 litres
NET WEIGHT	86 kg
OPERATION	
CYCLES	6 cycles
CYCLE INDICATOR	Yes
CYCLE TIME	28-32 min
CONTROLS	Manual
ACTIVATION	Single button push to start
WATER TEMP	Hot, warm, cold
MOTOR	0.5 hp
SPIN SPEED	473 (Delicate) 710 (Normal) rpm
FRONT SERVICE	Yes
CONSTRUCTION	
INNER BOWL	Stainless steel
OUTER BOWL	Triple coated enamel
OUTER CABINET	Steel
DRUM DRYER	Galvanised

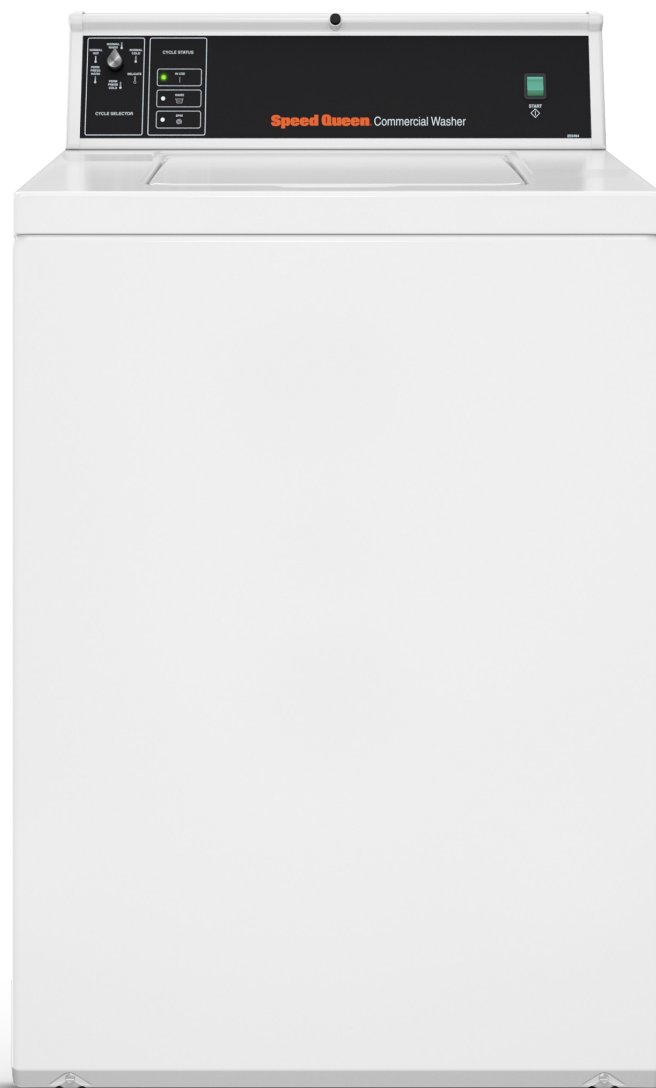

SWNMN2 Commercial Washer



TECHNICAL SPECIFICATIONS

UTILITIES

10 AMP SINGLE PHASE 240 V 50 HZ

10 AMP CIRCUIT-BREAKER REQUIRED

1.8 M POWER CORD

1.2 M HOT AND COLD WATER HOSES SUPPLIED

WATER SUPPLY HOSE TAP ENDS ¾ BSP THREADS

MAX HOT WATER CONSUMPTION 74.2 LITRES / CYCLE

MAX WATER CONSUMPTION 160 LITRES / CYCLE

MAX POWER DRAW 350 W / HR

DRAIN: 914 - 1,500 MM UPSTAND, 50 MM DIAMETER

WATER SUPPLY PRESSURE BETWEEN 20 -120 PSI

INSTALLATION KITS / ACCESSORIES AVAILABLE (POA)

SHIPPING DIMENSIONS


WEIGHT 95 kg

HEIGHT 1,125 mm


WIDTH 700 mm

DEPTH 780 mm, 0.62 m³

CONTROL

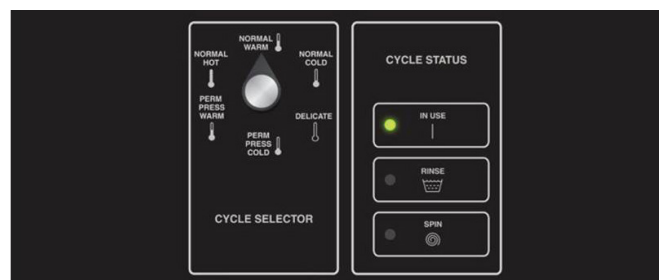

*For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice.

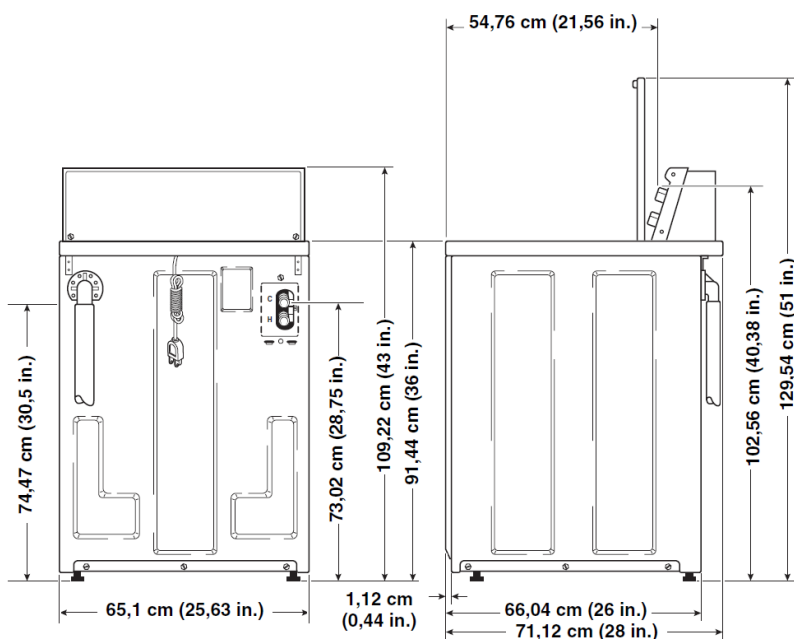

Speed Queen Equipment Sales
26 Theobald Street, Thornbury, VIC 3071
Ph: (03) 9495 1300
Ph: 1300 945 414
W: www.speedqueensales.com.au
E: info@speedqueensales.com.au
Servicing Victoria & Tasmania.