


SF023

SF023

MODEL
CALDOBAKE L4 SF023

- **Electric convection ovens**
- **Temperature 30°C-260°C**
- **Manual control**

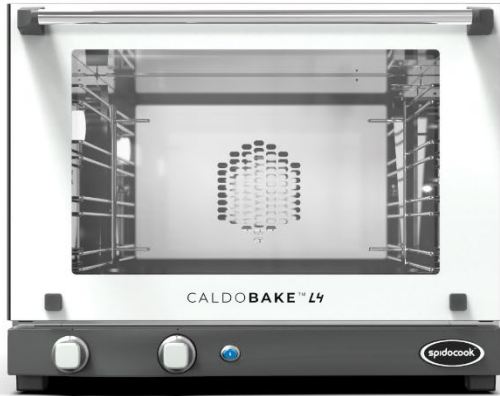

DESCRIPTION

Combi oven for fresh and frozen bakery, pastry and confectionary cooking processes; thanks to AIR.PLUS technology it obtains uniformity of baking in all the points of the single tray and in all the trays, and thanks to DRY.PLUS it ensures the texture of the baked products, allowing to obtain a dry and well-structured internal structure and a crisp and crumbly external surface.

STANDARD COOKING FEATURES

SETTINGS:

- **TEMPERATURE:** 30 °C – 260 °C.
- Manual Control
- 4 trays 460x330 Capacity

KEY FEATURES

- **DRY.PLUS:** Rapid extraction of humidity
- **AIR.PLUS:** Perfect distribution of the air and heat

STANDARD TECHNICAL FEATURES

- **Protek. Safe**TM Double Glass Door
- Assisted opening and soft-close door
- Stainless steel ergonomic Door Handle
- Illuminated Cooking Chamber
- Stainless steel tray supports
- Stainless steel AISI 304 cooking chamber
- Degree of protection IP-X3
- Silicone polymer gasket
- Non-slip feet

**INDUSTRY
KITCHENS**





www.industrykitchens.com.au 1800 611 058



SF023

Views
Dimensions and Weights
Connection positions
Power supply

SF023

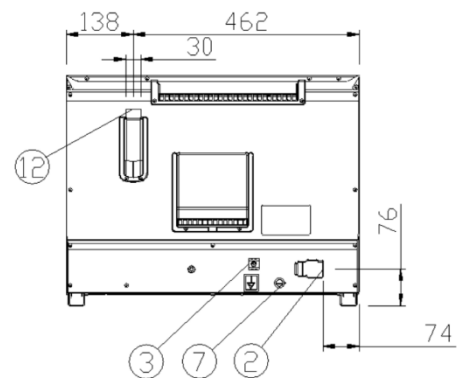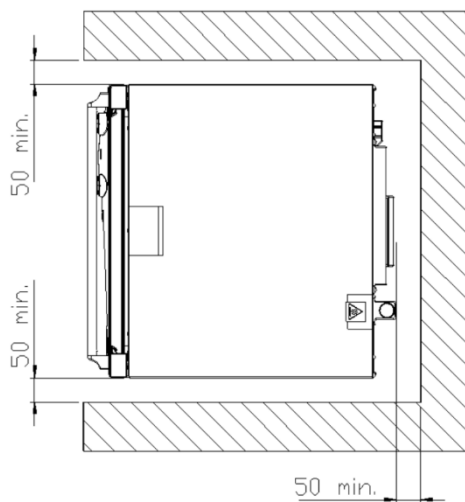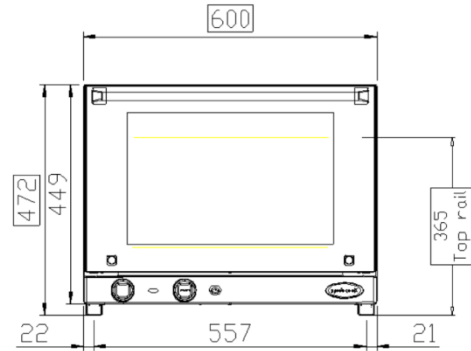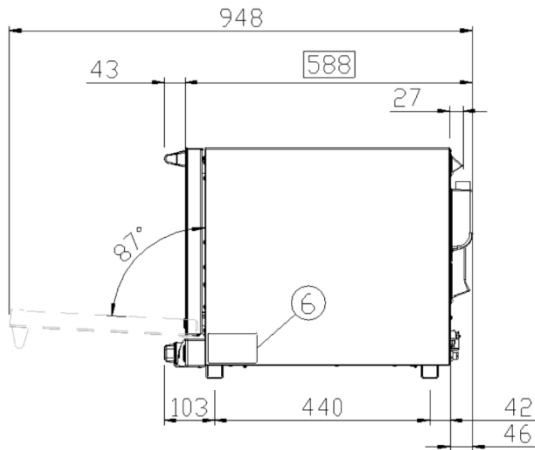

DIMENSIONS AND WEIGHT

Width	600 mm
Depth	588 mm
Height	472 mm
Weight	22 Kg
Pan Spacing	75 mm

CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat
12	Hot fumes exhaust chimney


POWER SUPPLY

Voltage	230 V
Phase	1PH+N+PE
Cycle	50-60 Hz
Power	3 kW
Maximum Amp Draw	13 A
Power cable requirement	H07RN-F 3G 1.5 mm ²
Cord diameter	10 mm
Plug	SCHUKO

SF023

Wiring diagrams

SF023

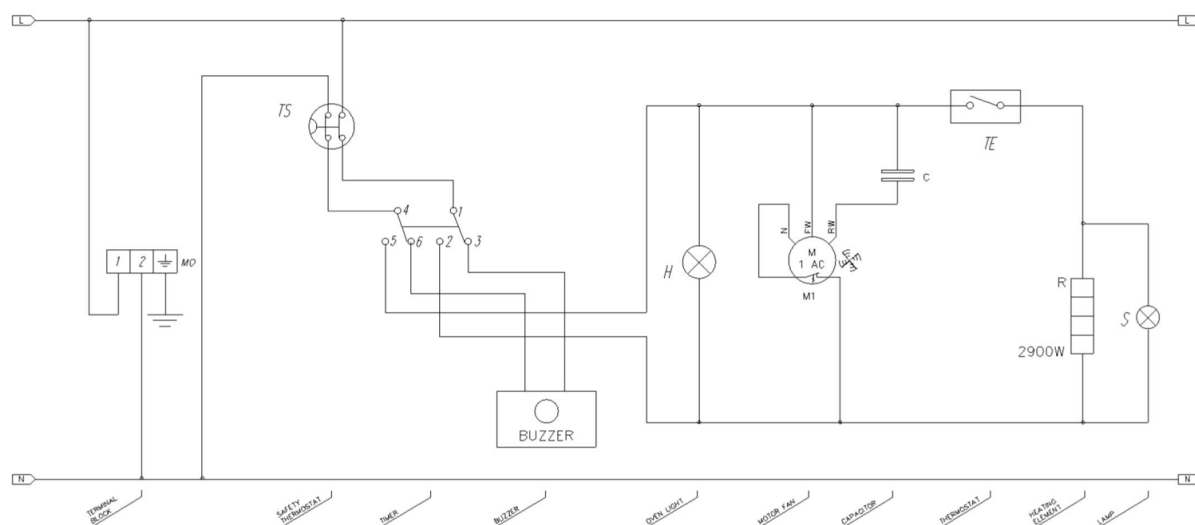

WIRING DIAGRAMS

μP	Door microswitch
BZ	Buzzer
C	Electric condenser
H	Oven light
IM	Reversing gear
K	Contacteur
M	Motor
PR	Refit push button
TE	Thermostat
TM	Timer
TS	Safety thermostat