

Pre-Rinse Tap ware kits

Installation Instructions



Spout Flow Rate

: 8.3 L/Min.

Spray Valve Flow Rate

: 5.7L/Min.

Max. Water Temperature

: 80°C

Min. Water Temperature

: 1°C

Min. Working Pressure

: 150kPa


Max. Working pressure

: 1000Kpa

Step 1

Mount your Tap body to the sink or other application utilized in the drawings below.

Deck Mount Dual Valve

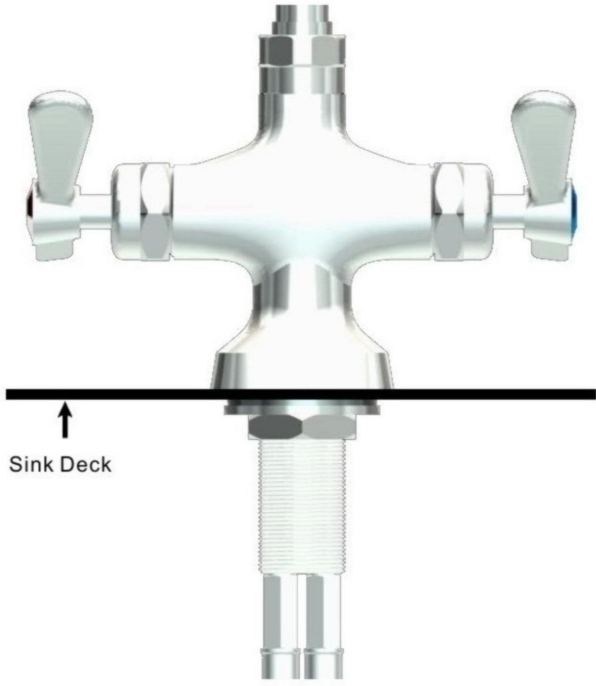

TAP Installation Notes:

MOUNTING KITS ARE NOT INCLUDED WITH ALL MODELS, HOWEVER ARE AVAILABLE IF NEEDED. PLEASE INQUIRE WITH YOUR PLUMBING SUPPLIER.

Required Tools and Installation Notes:

You will need the following tools to install your new Tap

Two adjustable wrenches, Phillips screwdriver,

saw for cutting metal, Teflon tape or approved compound for

sealing the threaded pipe connections.



Step 2

Insert the add on tap on the body

Screw the tap on the body

and use the adjustable

wrenches to tight it.



Step 3

Fix the bracket to the wall.

Use the screwdriver to fix the

bracket to the wall.



Step 4

Insert washer into hose.

Make sure that the appropriate washer

that is included separately in your box

is placed in the end of the pre-rinse

hose.



Step 5

Connect spray head to the pipe

Take the pre-rinse spray head, put

on the pipe and use a wrench to

tighten the connections.



Step 6

Tighten all fittings with wrench.

Check and tighten all connections

before turning on water supply to

prevent leaks.



Step 7

Fixed the spout on the add on tap.

Take the spout and use a adjustable

wrench to tighten it on the add on

tap

Installation Completion Notes:

If any leaking is noted after the water supply is turned on, shut off

water supply once again and check the affected area. Tighten the

connection and repeat process until leak is no longer present. If

problem persists, remove and reapply Teflon tape or appropriate

compound.



Warranty Information:

Thank you for purchasing Xsential Tap. A dedication to quality has

enabled us to provide what we believe to the finest quality commercial

Tap available. To support this claim we are pleased to offer this

guarantee against defects in material and/or workmanship for a period

of two year from date of purchase. Liability, in the event of defect(s) is

limited to, at Xsential's Discretion, replacement of the defective unit. Xsential

will neither bear any responsibility for freight damages or labor cost

as a result of any defects. The customer must handle any claims against

the carrier. Returned product will neither be accepted, replaced nor

credited without prior written authorization from Xsential.

This warranty shall take precedence over any other, either expressed or

implied Xsential of any of its agents.

Supplied by Tom Stoddart Pty Ltd

39 Forest Way,

Karawatha 4117

Ph: 1300 79 1954

www.stoddart.com.au