Spray Rinse - Deck Mount Full Size

SPPL.SRDF.15 (150mm Pot Filler) / SPPL.SRDF.30 (300mm Pot Filler)


Product Information

- Full stainless steel construction for strength and durability
- Pre-assembled and bench tested with traceable serial number for quality assurance
- WaterMark certified and lead-free for safe and compliant installation
- “Soft touch” ¼-turn tap handles with ceramic cartridges for smooth operation
- Triplex hose construction – three-layer design (braided, flex metal, protective outer) for enhanced durability and hygiene
- Spray rinse head with swivel adjustment (blade to shower) and self-release trigger
- Supplied with choice of 150mm or 300mm pot filler spout
- 6 Star WELS rating (spray rinse head): 4.5LPM
  3 Star WELS rating (pot filler): 8.0LPM
- **24-month warranty, parts and labour**



Specifications

Model	SPPL.SRDF.15	SPPL.SRDF.30
W x D x H (mm)	180 x 657 x 980* * Dimensions are nominal	180 x 657 x 980*
Pot Filler Spout	150mm	300mm
Weight	8kg	8kg
Packed W x D x H (mm)	360 x 1295 x 85	360 x 1295 x 85
Packed Weight	9kg	9kg
Water Supply Pressure	150 - 500kPa	150 - 500kPa
Recommended Maximum Operating Pressure	500kPa	500kPa
Water Supply Temperature	10˚C - 80°C	10˚C - 80°C



Legend


A Deck Mount Connection - recommended Ø32mm - 35mm


B Hot Water Connection - 1/2 BSP braided hose (500mm long)

C Cold Water Connection - 1/2 BSP braided hose (500mm long)

D Pot Filler Spout - 150mm (+/- 5mm)

E Pot Filler Spout - 300mm (+/- 5mm)

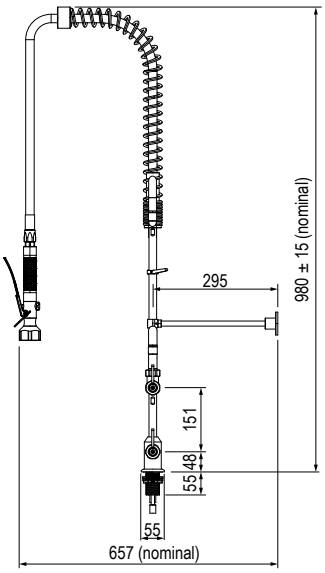

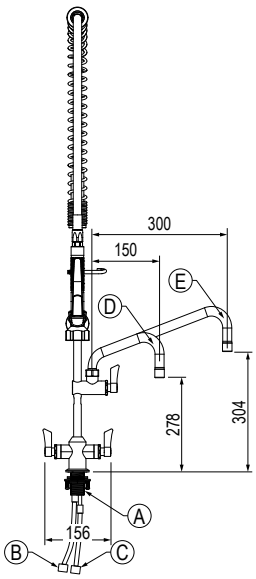

The more stars the more water efficient

WATER RATING
www.waterrating.gov.au

4.5 litres per minute (Spray Head)

In accordance with AS/NZS 6400
Licence No. 0196
Registered to
Tom Stoddart Pty Ltd

Second outlet (Pot Filler)
3 Star
8.0 litres per minute

Lead Free
AS3718
WM-26479

www.stoddart.com.au
www.stoddart.co.nz

Revision: A - 30/10/2025 - 01

Due to continuous product research and development,
the information contained herein is subject to change without notice.

innovative solutions