


MILK COOLER WITH SMART DISPLAY

MCC-10L



The smart display milk refrigerator ensures precise and reliable storage, delivering stable cooling between 0-5°C with fan forced cooling. The external touch panel allows temperature adjustment without opening the door, effectively maintaining internal temperature consistency while saving energy. Featuring a durable metal exterior and easy-to-clean HIPS interior, it operates efficiently at a low 65W power consumption. Its quiet operation, minimal vibration, and practical features like pre-drilled milk tube holes make it an ideal choice for cafes, small kitchens, and retail environments.

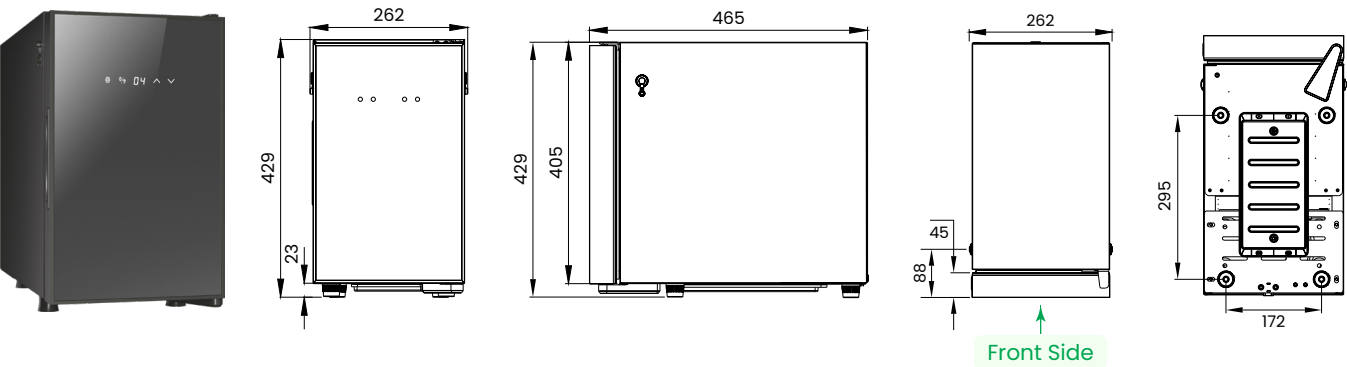

FEATURES AND FUNCTIONS	
Cooling System	Fan forced cooling
Energy Consumption	0.307 kwh/24h
Exterior & Interior of the Cabinet	Metal exterior cabinet with (HIPS) interior body.
Ergonomic Design	Automatic defrost, Self-evaporative 0.22L water tray, Digital controller, Rounded corners designed for easy and safe cleaning.
Durable Door Profile	Plastic handle with heavy-duty magnetic door seals, Integrated recessed door handle.
Insulation	40mm thickness
Ventilation	Top/Rear/Side: 50mm

TECHNICAL DESCRIPTION	
Power Cord	10Amp plug and lead
Power Cord Length	2m outside cabinet
Power Supply	240V / 50Hz, 65W
Rated Current	1.2A
Compressor Cooling Capacity	55W
LED Lights	1 pc*0.25W at top of Inner cabinet

WARRANTY
1 Year Parts and Labour Warranty



PHYSICAL QUALITIES	
Width (mm)	262
Depth (mm)	465
Height (mm)	429
Packing Width (mm)	308
Packing Depth (mm)	477
Packing Height (mm)	522
Net Weight (kg)	11.3
Gross Capacity (L)	10
Milk Container Capacity (L)	4
Internal Dimensions (WxDxH mm)	170x180x330

PERFORMANCE SPECIFICATION	
Ambient Temp/RH	32°C 70%
Climatic Class	4
Temperature Range	0 to +5°C
Refrigerant	R600a

SAFETY & STANDARDS: IEC/IECEE CB Scheme;



To ensure we continuously offer the best possible products, we reserve the right to modify specifications without any obligation for equipment previously or subsequently sold.