




### Product Advantages:

- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels - 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with

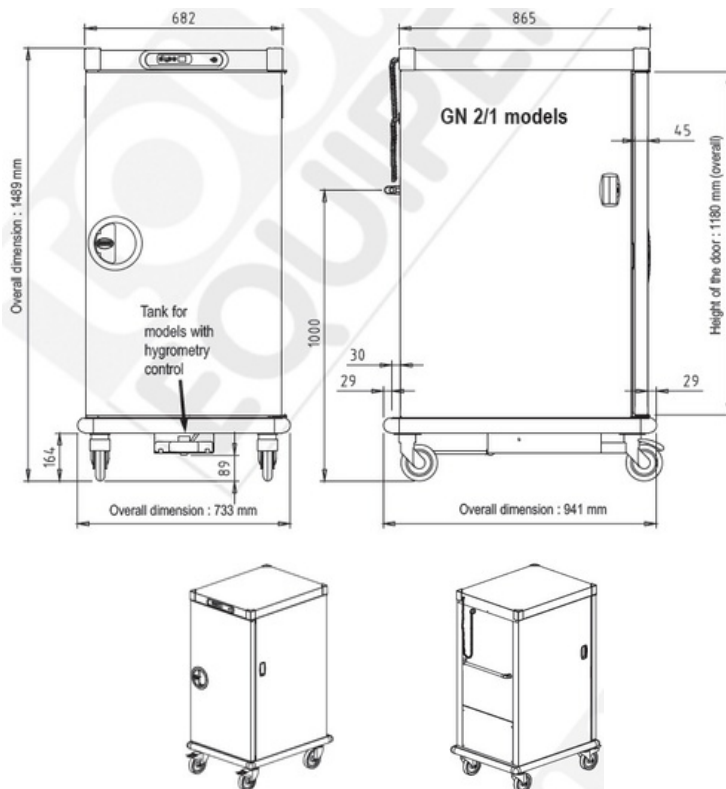

### Technical Data:

|                       |                                                               |
|-----------------------|---------------------------------------------------------------|
| Reference             | 507 451                                                       |
| Loading               | 10 GN2/1 containers h. 65mm<br>Or 20 GN1/1 containers h. 65mm |
| Space between sliders | 71 mm                                                         |
| External dimensions   | 733 x 941 x 1489 mm                                           |
| Internal dimensions   | 535 x 710 x 1105 mm                                           |
| External volume       | 0.782 m <sup>3</sup>                                          |
| Internal volume       | 0.285 m <sup>3</sup>                                          |
| Weight when empty     | 89 kg                                                         |
| Connected load        | 1.2 kW - 240 1 phase AC<br>1 x 10 A                           |
| Current (A)           | 5.5                                                           |
| Power consumption     | 0.41 kwh                                                      |
| Protection index      | 25                                                            |
| Standards             | NF EN 60335-1<br>NF EN 60335-2-49                             |

