


# TSSU-60-24M-B-ST-HC FLID

 Prep Table, 24x 1/6 Top Pans, 2 Solid Swing Doors, Removable lids



| Dimensions                         |  |
|------------------------------------|--|
| External Width (mm)                | 1534   |
| External Depth (mm)                | 867  |
| External Height (mm)               | 961  |
| Exclusions                         | Depth does not include 26 mm for rear bumpers. Height with lid closed. |
| Gross Volume (Litres)              | 439  |
| Supplied Shelves                   | 4  |
| Shelf Size (L x D mm)              | Two 700 x 546 + Two 700 x 349  |
| Internal Net Height (mm)           | 535  |
| Top Pans Supplied (depth mm)       | 24x 1/6 GN (100)   |
| Unpackaged Weight (kg)             | 164  |
| Packaged Weight (kg)               | 175  |
| Packaged Dimensions (W x D x H mm) | 1601 x 940 x 1270  |
| Cutting Board (L x D mm)           | 1534 x 226   |
| Supplied with                      | Heavy duty lock-in-place ø 127 mm castors (158 mm height)              |

| Build                 |   |
|-----------------------|---|
| Door Description      | 2 Solid Swing Doors   |
| Exterior Construction | Stainless steel front, top & lids, aluminium sides and rear |
| Interior Construction | Clear coated aluminium, stainless steel base                |
| Air Intake Position   | Front   |
| Ventilation Position  | Front   |
| Clearance Required    | Zero back and sides   |
| Cord Length (Meters)  | 3.35  |
| Standard w/ Locks     | Not Standard (SPEC3 option)                                 |

| Technical               |                    |
|-------------------------|--------------------|
| Temperature Range       | 0.5 : 5°C          |
| Refrigerant             | R290               |
| Voltage/Frequency/Phase | 220-240V/50-60Hz/1 |
| Amps                    | 2.2                |
| Watts                   | 506                |
| Defrost Type            | Auto               |



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


[0800 783 2049](tel:08007832049)  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TSSU-60-24M-B-ST-HC FLID

Prep Table, 24x 1/6 Top Pans, 2 Solid Swing Doors, Removable lids

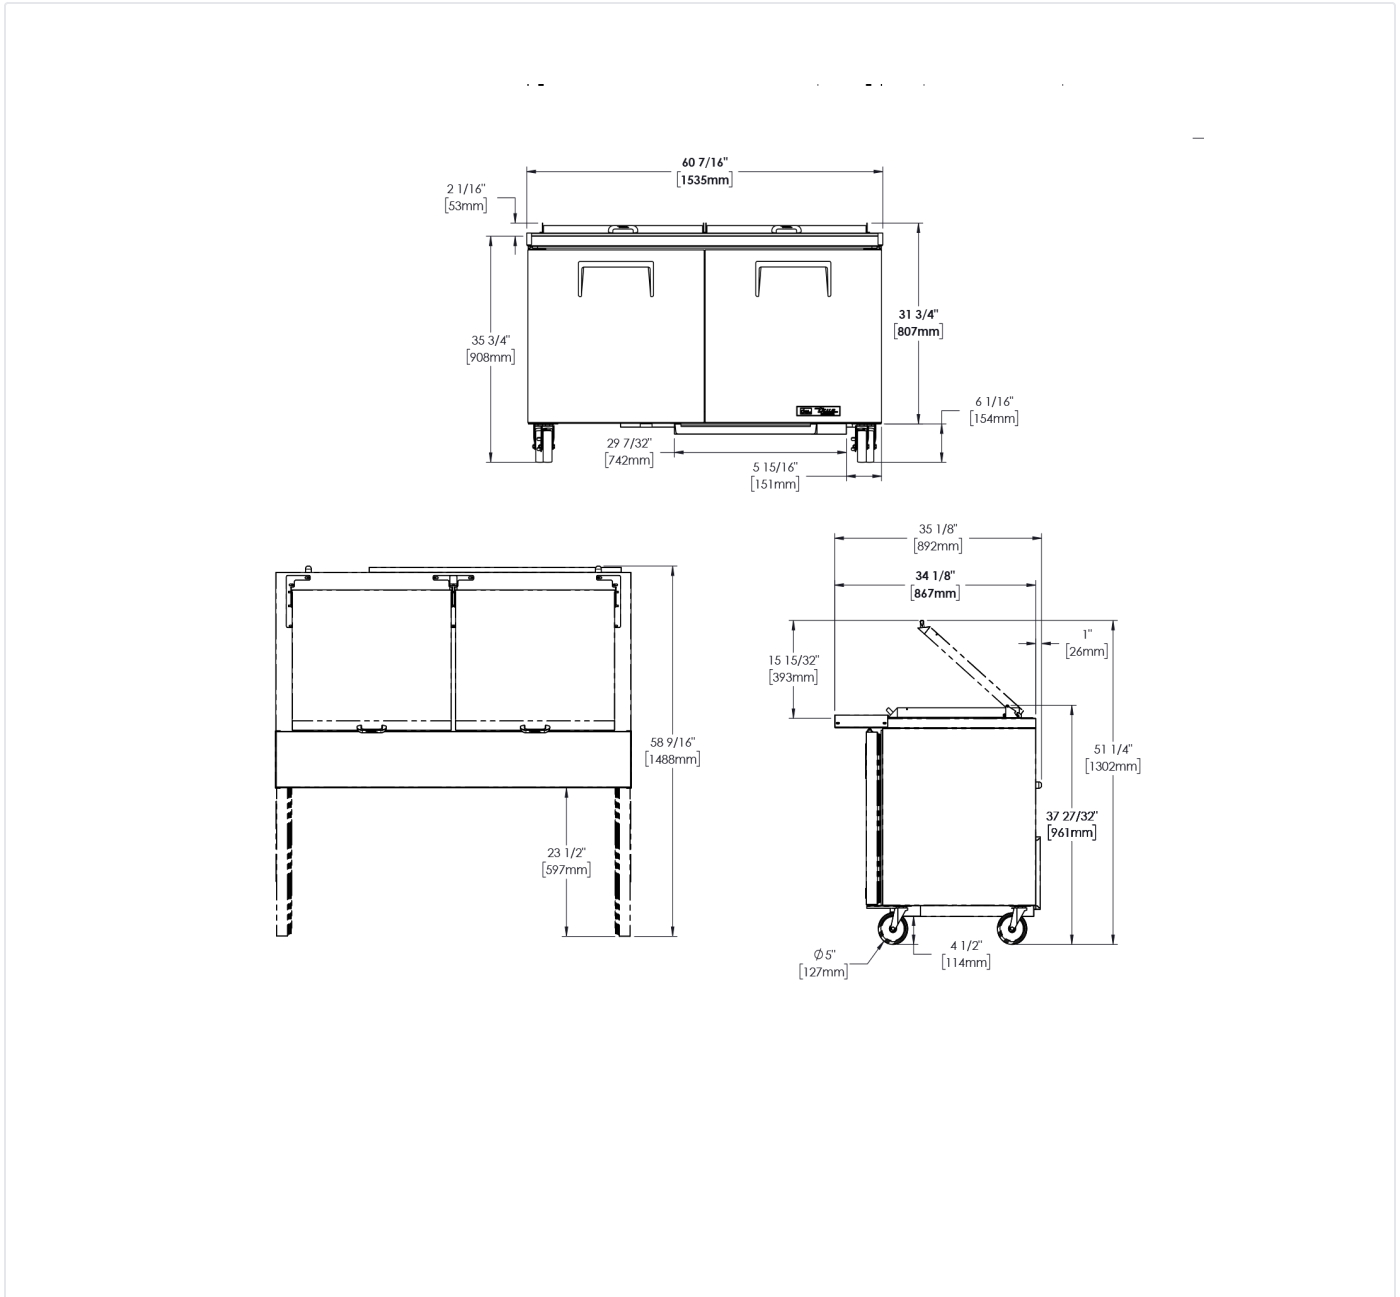

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

