

XOMA-01NS-MCDN

Project	
Item	
Quantity	
Date	

Model SPEED.Compact™ ECO

Speed oven	Electric			
1 tray 300x300	Drop down opening			
9.5" Touch control panel				
Voltage: 240V 1~				



Description

The SPEED.Compact™ ECO is a 60 cm depth speed oven with a 30x30 cm cooking chamber and a 17 cm door opening footprint. Designed for speed and consistency, it uses microwaves and hot airflows to quickly reheat baked goods, snacks, and leavened items. Its intuitive interface ensures effortless setup and operation, streamlining workflows from day one. The easy panel-guided stepby-step cleaning procedure can be further enhanced with the optional QUICK. Rinse hand shower accessory. No exhaust pipes, hoods, or complex installation manuals are needed, the oven is ready to use straight out of the box. As one of the guietest and most odour-free models yet, it integrates seamlessly into any workspace, even side-by-side, optimising counter space. Featuring advanced mineral insulation and smart technology, the oven ensures energy efficiency and lasting durability.

Standard cooking features

Manual cooking

- Temperature: 30 °C 280 °C
- Up to 9 cooking steps

Programs

- 384 Speed programs
- 10 favorite programs
- SPEEDUNOX: choose something to cook from the library and the oven will automatically set all the parameters

Advanced and automatic cooking features

Unox Intelligent Performance

- ADAPTIVE.Cooking™: automatically regulates the cooking parameters to ensure repeatable results
- SMART.Preheating: automatically sets the preheating temperature and duration
- SMART.Energy: automatic energy-saving function that recognises the absence of food in the cooking chamber and activates the stand-by mode reducing temperature and consumption.

Unox Intensive Cooking

• SPEED.Plus: generates microwaves and distributes them evenly throughout the baking chamber

Key features

- High-resistance AISI 304 stainless steel cooking chamber
- Baking chamber with integrated tray supports
- · Chamber-and-chimney catalysts to minimise gas, noise and odour emissions.
- Rock wool mineral insulation ensures maximum energy efficiency.
- Crumb collection system integrated in the filter under the door
- Proximity door contact switch
- PLUG&PLAY installation: no exhaust pipes, hoods, or complex installation manuals are needed, the oven is ready to use straight out of the box.
- · User friendly and intuitive control panel.
- CLICK&COOK: feature to start favourite cooking programmes directly from the main screen of the panel with just a touch.
- Step-by-step cleaning procedure guidance from the control panel.
- Integrated Wi-Fi
- Wi-Fi / USB data: download/upload HACCP data and programs


App and web services


• Data Driven Cooking app & webapp: check and monitor in realtime the operating conditions of your ovens, create and share new recipes. Artificial intelligence transforms consumption data into useful information and allows you to increase daily profits







XOMA-01NS-MCDN

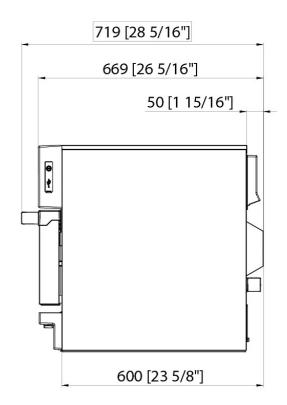







Dimensions and weight

Width	424 mm
Depth	719 mm
Height	616 mm
Net weight	50 kg

Connection positions

2	Terminal board power supply
3	Unipotential terminal
7	Safety thermostat
12	Hot fumes exhaust chimney
27	Cooling air outlet



XOMA-01NS-MCDN

Electrical power supply

Voltage 240 V Phase ~1PH+PE Frequency 50 Hz Total power 3.6 kW Max Amp draw 16 A Required breaker size 15 A Power cable requirements* 3G x 1,5 mm^2 Plug AU 2-15P H07RN-F	OPTION A	
Frequency 50 Hz Total power 3.6 kW Max Amp draw 16 A Required breaker size 15 A Power cable requirements* 3G x 1,5 mm^2	Voltage	240 V
Total power 3.6 kW Max Amp draw 16 A Required breaker size Power cable requirements* 3G x 1,5 mm^2	Phase	~1PH+PE
Max Amp draw 16 A Required breaker size 15 A Power cable requirements* 3G x 1,5 mm^2	Frequency	50 Hz
Required breaker size 15 A Power cable requirements* 3G x 1,5 mm^2	Total power	3.6 kW
Power cable requirements* 3G x 1,5 mm^2	Max Amp draw	16 A
requirements* 3G x 1,5 mm^2		15 A
Plug AU 2-15P H07RN-F		3G x 1,5 mm^2
	Plug	AU 2-15P H07RN-F

^{*}Recommended size - observe local ordinance.

Accessories

- SPRAY&Rinse: Practical spray detergent to manually clean all kinds of oven. It degreases and removes all kind of dirt
- Speed Essentials: special trays and spatulas for SPEED mode
- Ethernet: Connection board to keep the oven connected to Unox and DDC.App
- Storage tabletop: multi-function compartment, practical 430 stainless steel anti-scratch storage compartment to be placed on the oven roof.
- SPEED.Marks: non-stick aluminium ribbed tray paired with a ribbed top plate to double-side toast bread.
- QUICK.Rinse hand shower for easy cleaning.
- SPEED.Bake tray: innovative two-level aluminium tray to effortlessly manage consistent and uniform multi-portion cooking.

Installation requirements

Unox products must be installed in facilities where all the systems (gas, electric, hydraulic, ventilations, aerations, etc.) comply with the current national standards. Combustion analysis must be performed in case of gas ovens.

Register to DDC Service to access data and product specifications.

Unox S.p.A.