



Technical data sheet for

FAST FRI SINGLE PAN ELECTRIC FRYER 600mm

FN8135E



- 22kW high performance single pan fryer
- Easy clean flat bar heating elements
- Easy clean stainless steel open pan with 10 year limited warranty
- 35L oil tank capacity
- 3 standard or 2 large basket capacity
- Electronic thermostat
- 32mm (1 1/4") drain valve
- Stainless steel exterior
- Easy service
- Fully modular

Series Options

- FN** - Standard splashback models
- FNB** - Bold vitreous enamel colour front finish on standard splashback models

Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Hinge out counter-balanced heating elements
- 32mm (1 1/4") drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 3 standard baskets and stainless steel lid supplied standard

Controls

- Electronic thermostat
- Large easy use control with easy view scale
- Thermostat range 90 – 190°C
- Fail-safe over-temperature safety cut-out
- Element tilt switch for heating cut-out on element lift
- Indicator lights for power and heating
- Safety start switch

Cleaning and Servicing

- Open stainless steel pans with hinge out elements for easy clean
- Easy clean basket support bar
- 32mm (1 1/4") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all controls from front of unit

Technical data sheet for

FAST FRI SINGLE PAN ELECTRIC FRYER 600mm

FN8135E

Specifications

Production rate
40kg/hr

Pan Size
Width 515mm
Length 390mm
Oil frying depth 95mm
Oil capacity 35L

Baskets
3 nickel plated standard wire baskets
145mm W x 335mm D x 145mm H
Optional 2 nickel plated large wire baskets
210mm W x 335mm D x 145mm H
Stainless steel perforated basket support plate

Elements
2 x 11kW flat bar stainless steel heating elements

Electrical Requirements
22kW 400-415 Vac, 50/60Hz, 3P+N+E
L1 30.5A
L2 30.5A
L3 30.5A

Electrical Connection
41mm from RH side, 70mm from rear, and
485mm from floor


DIMENSIONS
Width 600mm
Depth 805mm
Height 915mm
Incl. splashback 1130mm

NETT WEIGHT
74kg

PACKING DATA
0.76m³, 99kg
Width 670mm
Depth 900mm
Height 1255mm

OPTIONS AT EXTRA COST
Fish plates
Extra standard baskets
Extra large baskets
Side splash guards
Joining caps
Castors
Plinth mounting

FN8135E

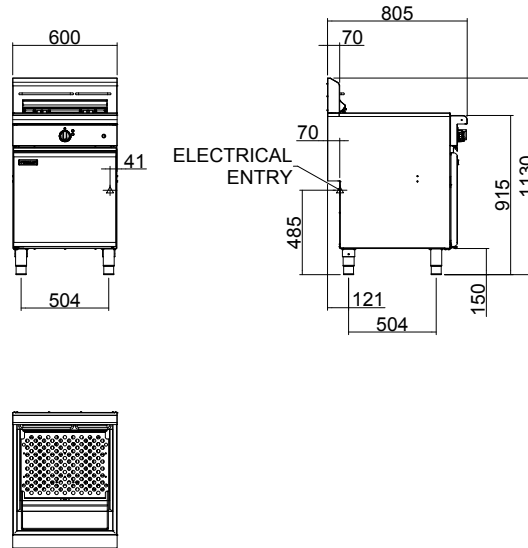

moffat.com.au
moffat.co.nz

Australia
moffat.com.au

Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au
South Australia
Telephone +613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au
Western Australia
Telephone +618-9413 2400
wasales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited
Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz
Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.W8.SS.01.23

an Ali Group Company



The Spirit of Excellence