

Technical data sheet for

FAST FRI SINGLE PAN ELECTRIC FRYER 600mm

FN8135EE



- 22kW high performance single pan fryer
- Easy clean flat bar heating elements
- Digital display temperature control with 2 basket timers
- Easy clean stainless steel open pan with 10 year limited warranty
- 35L oil capacity
- 3 standard or 2 large basket capacity
- 32mm (1¼") drain valve
- Stainless steel exterior
- Easy service
- Fully modular

Series Options

- FN** - Standard splashback models
- FNB** - Bold vitreous enamel colour front finish on standard splashback models

Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Hinge out counterbalanced heating elements
- 32mm (1¼") drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 3 standard baskets and stainless steel lid supplied standard

Controls

- Digital display electronic thermostat
- Thermostat range 88-190°C
- 2 programmable basket timers with countdown display and alarms
- Heating and basket drop displays
- Programmable melt cycles
- Fail-safe over-temperature safety cut-out
- Element tilt switch for heating cut-out on element lift
- Safety start switch

Cleaning and Servicing

- Open stainless steel pan with hinge out elements for easy clean
- Easy clean basket support bar
- 32mm (1¼") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all controls from front of unit

Technical data sheet for

FAST FRI SINGLE PAN ELECTRIC FRYER 600mm

FN8135EE

Specifications

Production rate

40kg/hr

Pan Size

Width 515mm

Length 390mm

Oil frying depth 95mm

Oil capacity 35L

Baskets

3 nickel plated standard wire baskets

145mm W x 335mm D x 145mm H

Optional 2 nickel plated large wire baskets

210mm W x 335mm D x 145mm H

Stainless steel perforated basket support plate

Elements

2 x 11kW flat bar stainless steel heating elements

Electrical Requirements

22kW 400-415 Vac, 50/60Hz, 3P+N+E

L1 30.5A

L2 30.5A

L3 30.5A

Electrical Connection

41mm from RH side, 70mm from rear, and 485mm from floor

DIMENSIONS

Width 600mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

NETT WEIGHT

74kg

PACKING DATA

0.76m³, 99kg

Width 670mm

Depth 900mm

Height 1255mm

OPTIONS AT EXTRA COST

Fish plates

Extra standard baskets

Extra large baskets


Side splash guards

Joining caps

Castors

Plinth mounting

FN8135EE

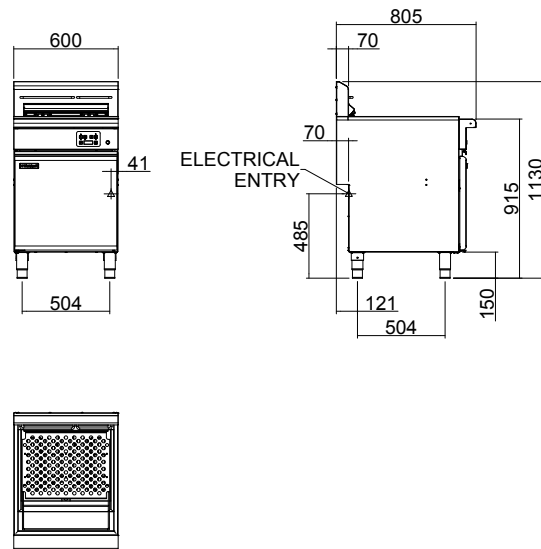

moffat.com.au

moffat.co.nz

Australia

moffat.com.au

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +612-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +613-9518 3888

vsales@moffat.com.au

Queensland

Telephone +617-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +618-9413 2400

wasales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

Rolleston

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz



ISO9001
Quality
Management
Standard

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
AN.W8.SS.01.23

an Ali Group Company



The Spirit of Excellence