

Technical data sheet for

# FAST FRI TWIN PAN ELECTRIC FRYER 600mm

FN8235EE



- 22kW high performance twin pan fryer
- Easy clean flat bar heating elements
- 2 digital display temperature control 4 basket timers
- Easy clean stainless steel open pan with 10 year limited warranty
- 17.5L per pan oil capacity
- 2 large basket capacity
- 25mm (1") drain valves
- Stainless steel exterior
- Easy service
- Fully modular

## Series Options

- FN** - Standard splashback models
- FNB** - Bold vitreous enamel colour front finish on standard splashback models

## Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Hinge out counterbalanced heating elements
- 25mm (1") drain valves
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 large baskets and stainless steel lid supplied standard

## Controls

- Digital display electronic thermostats
- Thermostat range 88-190°C
- 2 programmable basket timers with countdown display and alarms per pan
- Heating and basket drop displays
- Programmable melt cycles
- Fail-safe over-temperature safety cut-outs
- Element tilt switch for heating cut-out on element lift
- Safety start switch

## Cleaning and Servicing

- Open stainless steel pans with hinge out elements for easy clean
- Easy clean basket support bar
- 25mm (1") drain valves for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for

# FAST FRI TWIN PAN ELECTRIC FRYER 600mm

FN8235EE

## Specifications

### Production rate

40kg/hr

### Pan Size (per pan)

Oil capacity 17.5L

Width 250mm

Length 390mm

Oil frying depth 95mm

### Baskets

2 nickel plated large wire baskets

210mm W x 335mm D x 145mm H

Stainless steel perforated basket support plate

### Elements (per pan)

1 x 11kW flat bar stainless steel heating elements

### Electrical Requirements

22kW 400-415 Vac, 50/60Hz, 3P+N+E

L1 30.5A

L2 30.5A

L3 30.5A

### Electrical Connection

41mm from RH side, 70mm from rear, and

485mm from floor

### DIMENSIONS

Width 600mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

### NETT WEIGHT

77kg

### PACKING DATA

0.76m<sup>3</sup>, 102kg

Width 670mm

Depth 900mm

Height 1255mm

### OPTIONS AT EXTRA COST

Fish plates

Extra baskets




Side splash guards

Joining caps

Castors

Plinth mounting

FN8235EE

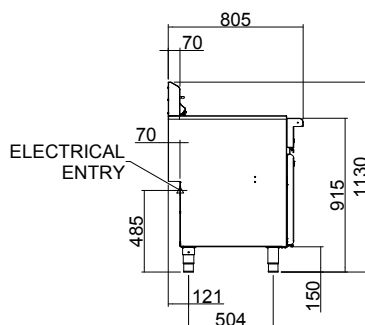

[moffat.com.au](http://moffat.com.au)

[moffat.co.nz](http://moffat.co.nz)

Australia

[moffat.com.au](http://moffat.com.au)

**Moffat Pty Limited**

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +613-9518 3888

Facsimile +613-9518 3833

[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New South Wales

Telephone +612-8833 4111

[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia

Telephone +613-9518 3888

[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland

Telephone +617-3630 8600

[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia

Telephone +618-9413 2400

[wasales@moffat.com.au](mailto:wasales@moffat.com.au)

**New Zealand**

[moffat.co.nz](http://moffat.co.nz)

**Moffat Limited**

Rolleston

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

Auckland

Telephone +64 9-574 3150

[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



ISO9001  
Quality  
Management  
Standard

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.W8.SS.01.23

an Ali Group Company



The Spirit of Excellence