

Technical data sheet for

INDUCTION WOK 450mm

IN8100W3-B, IN8100W3-LS, IN8100W3-CB, IN8100W5-B, IN8100W5-LS, IN8100W5-CB



IN8100W3(5)-LS

- Heavy-duty construction
- 300mm round induction wok
- 3.5kW or 5kW models
- Automatic pan detection switches induction off when wok pan removed
- 3 models of base unit
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular
- Low back models (INL) available

Induction Options

W3 - 3.5kW single phase

W5 - 5kW three phase

Series Options

IN - Standard splashback models

INL - Low back models

INB - Bold vitreous enamel colour front finish on standard splashback models

INLB - Bold vitreous enamel colour front finish on low back models

Overall Construction

COOKTOP

- Welded hob with 2.0mm stainless steel hob top
- Splashback and side panels 1.2mm stainless steel
- Front panels 0.9mm stainless steel
- 6mm thick ceramic glass wok hole

BENCH MOUNT (supplied as – B model)

- Four 63mm dia. heavy-duty 1.2mm 304 stainless steel bench legs with adjustable feet
- Adjustable height 80mm – 105mm

LEG STAND (supplied as – LS model)

- Fully modular for matched suite finish
- Framed top for connection to Cooktop
- 63mm dia. heavy-duty 1.2mm 304 stainless steel legs with four adjustable feet
- Fully modular framed stand shelf with 0.9mm 304 stainless steel finish
- Quick assembly design

CABINET BASE (supplied as – CB model)

- Fully modular for match suite finish
- Double skin 0.9mm 304 stainless steel interior and exterior
- 63mm dia. heavy-duty 1.2mm 304 stainless steel legs with four adjustable feet

Controls

- Large easy use control knob
- Variable power control
- Heating ON indicator light including pan detection indication
- Error mode indicator light

Cleaning and Servicing

- All models with easy clean stainless steel external finish
- Fully sealed cooking surface
- Removable full stainless steel air intake filter (induction cooling)
- Front service access

INDUCTION WOK 450mm

IN8100W3-B, IN8100W3-LS, IN8100W3-CB, IN8100W5-B, IN8100W5-LS, IN8100W5-CB

Specifications

COOKTOP

3.5kW induction wok
or

5.0kW induction wok
Ø 300mm induction

Electrical requirements

IN8100W3

3.5kW, 220-240V, 50/60Hz, 1P+N+E
16A

IN8100W5

5.0kW, 380-415V, 50/60Hz, 3P+E
8A / phase

Electrical connection

130mm from LH side, 30mm from rear,
635 from floor

DIMENSIONS

Bench model

Width 450mm
Depth 805mm
Height 415mm
Incl. splashback 630mm
Incl. low back 470mm

All models (excluding Bench model)

Width 450mm
Depth 805mm
Height 915mm
Incl. splashback 1130mm
Incl. low back 970mm

NETT WEIGHT

88kg



PACKING DATA

0.54m³, 130kg
Width 495mm
Depth 865mm
Height 1255mm



OPTIONS AT EXTRA COST

Castors
Plinth mounting



IN8100W-B

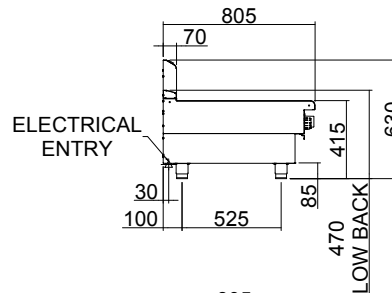


IN8100W-LS

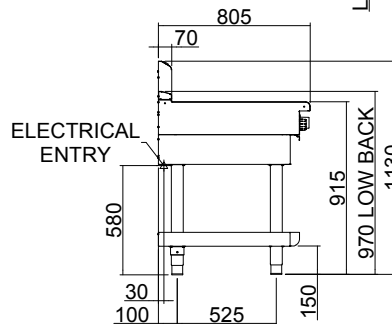

IN8100W-CB

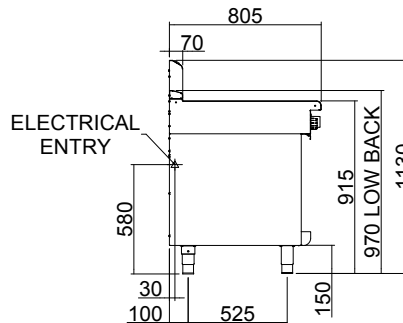

IN8100W3
IN8100W5



moffat.com.au
moffat.co.nz

Australia
moffat.com.au

Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New South Wales
Telephone +612-8833 4111
nswsales@moffat.com.au

South Australia
Telephone +613-9518 3888
vsales@moffat.com.au

Queensland
Telephone +617-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone +618-9413 2400
wasales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

Auckland
Telephone +64 9-574 3150
sales@moffat.co.nz



In line with policy to continually develop
and improve its products, Moffat
Limited reserves the right to change
specifications and design without notice.

© Copyright Moffat Ltd
AN.W8.01/23