

# Twin Pan Electric Fryer 600mm

FNB8235EE



## OVERALL CONSTRUCTION

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Hinge out counterbalanced heating elements
- 25mm (1") drain valves
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 large baskets and stainless steel lid supplied standard

## CONTROLS

- Digital display electronic thermostats
- Thermostat range 88-190°C
- 2 programmable basket timers with countdown display and alarms per pan
- Heating and basket drop displays
- Programmable melt cycles
- Fail-safe over-temperature safety cut-outs
- Element tilt switch for heating cut-out on element lift
- Safety start switch

## CLEANING AND SERVICING

- Open stainless steel pans with hinge out elements for easy clean
- Easy clean basket support bar
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all controls from front of unit


- 22kW high performance twin pan fryer
- Easy clean flat bar heating elements
- 2 digital display temperature control  
4 basket timers
- Easy clean stainless steel open pan with  
10 year limited warranty
- 17.5L per pan oil capacity
- 2 large basket capacity
- 25mm (1") drain valves
- Stainless steel exterior
- Black vitreous enamel finish to front panels
- Easy service
- Fully modular

# **Waldorf Bold**

## Twin Pan Electric Fryer 600mm

FNB8235EE

FNB8235EE

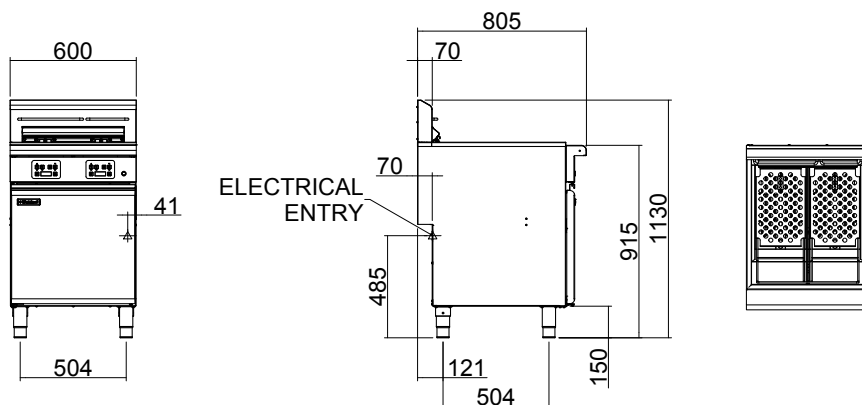

### SPECIFICATIONS

#### Production rate

40kg/hr

#### Pan Size (per pan)

Oil capacity 17.5L

Width 250mm

Length 390mm

Oil frying depth 95mm

#### Baskets

2 nickel plated wire baskets

210mm W x 335mm D x 145mm H

#### Elements (per pan)

1 x 11kW stainless steel heating element

#### Electrical requirements

22kW, 400-415Vac, 50/60hz, 3P+N+E

L1 30.5A

L2 30.5A

L3 30.5A

#### Electrical Connection

41mm from RH side, 70mm from rear  
and 485mm from floor

#### Dimensions

Width 600mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

#### Nett weight

77kg nett

#### Packing data

0.76m<sup>3</sup>, 102kg

Width 670mm

Depth 900mm

Height 1255mm

#### OPTIONS AT EXTRA COST

Waldorf Filtamax filtration system

Extra baskets

Side splash guards

Joining caps

Castors

Plinth mounting



moffat.com.au

moffat.co.nz

#### Australia

moffat.com.au

#### Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +612-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +613-9518 3888

vsales@moffat.com.au

Queensland

Telephone +617-3630 8600

qldsals@moffat.com.au

Western Australia

Telephone 618-9413 2400

wasales@moffat.com.au

#### New Zealand

moffat.co.nz

#### Moffat Limited

Rolleston

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz



ISO9001

Quality  
Management  
Standard

Designed and manufactured by



ISO9001

All Waldorf Bold products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.WBD.S.01.23

an Ali Group Company



The Spirit of Excellence