

Technical data sheet for

SINGLE PAN GAS FRYER 400mm

FN8118



FN8118G

- 400mm wide single pan fryer
- 22.5kW multi-jet target burner
- 25kg / hr production rate
- Easy clean stainless steel open pan
- 18L oil capacity
- V-tank with cool zone
- 30mm drain valve
- Stainless steel exterior
- Easy service
- Fully modular
- Low back models (BPL) available

Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 0.9mm 430 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- 30mm drain valve
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 baskets and stainless steel lid supplied standard

Controls

- Mechanical thermostat
- Thermostat range 100-190°C
- Over-temperature safety cut-out
- Millivolt gas valve system (no electrical supply)
- Flame failure protection

Cleaning and Servicing

- Open stainless steel pan for easy clean
- Easy clean basket support bar
- 30mm drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Technical data sheet for SINGLE PAN GAS FRYER 400mm

FN8118

Specifications

Production rate

25kg/hr

Pan Size

Oil capacity 18L (32lbs shortening)

Width 305mm

Length 380mm

Oil frying depth 95mm

Baskets

2 nickel plated wire baskets

140mm W x 335mm D x 145mm H

Nickel plated wire basket grid

Burners

Multi-jet target U-burners

Gas power

22.5kW, 85,300 Btu/hr

Gas connection

R $\frac{1}{2}$ (BSP) male

40mm from RH side, 24mm from rear,
and 223mm from floor

All units supplied with Natural and
LP gas regulator

Dimensions

Width 400mm

Depth 805mm

Height 915mm

Incl. low back 1085mm

Incl. splashback option 1130mm

Nett weight

57kg nett

Packing data

0.54m³, 97kg

Width 870mm

Depth 495mm

Height 1255mm

Gas types

Available in Natural gas and LP gas

Please specify when ordering

Other gas types on request

OPTIONS AT EXTRA COST

Extra baskets

Fish plates


Side splash guards

Joining caps

Castors

Plinth mounting

Gas conversion kits

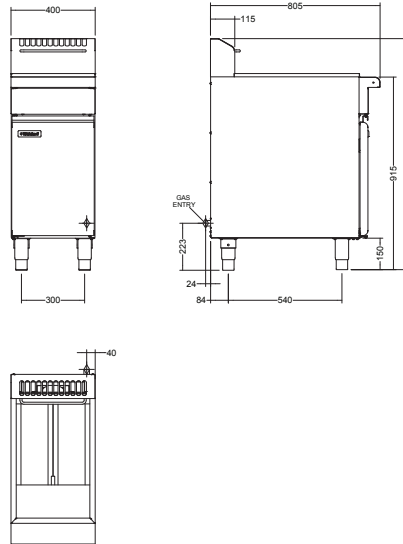


moffat.com.au

moffat.co.nz

Australia

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +612-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +613-9518 3888

vsales@moffat.com.au

Queensland

Telephone +617-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +618-9413 2400

wasales@moffat.com.au

New Zealand

Moffat Limited

Rolleston

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Waldorf800 products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



Cert. No. 6882

© Copyright Moffat Ltd
AN.W8.09/19

an Ali Group Company



The Spirit of Excellence