

AL

HIGH CAPACITY PASSTHROUGH DISHWASHER



STANDARD FEATURES

- 40, 60 and 90 second cycles
- Wash capacity of up to 1980 plates per hour
- Compatible with 600x500 racks - 5 GN pans or 22 plates
- Touchscreen controls with versatile Heads Up Display
- Powerful 1.5HP soft start wash pump
- Dual chemical pumps
- Insulated front hood
- Assured rinse with dual boilers and booster pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction and manifold
- Independent stainless-steel wash and rinse arms

- 1x 600mm GN tray rack (600 70042)
- 1x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503)
- 1x plumbing connection kit (water and chemical hoses)

SPECIFICATIONS

A - Hot Water

Temperature	65°C*
Connection	3/4" male, hose supplied
Pressure	100-500kPa
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400	50	15	9.00


*Suitable for connection to low inlet temp, flow and/or pressure supplies. Isolating switch must be within 1m of, and not directly behind, the machine. Refer to operator manual for installation instructions.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

WASHTECH®

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

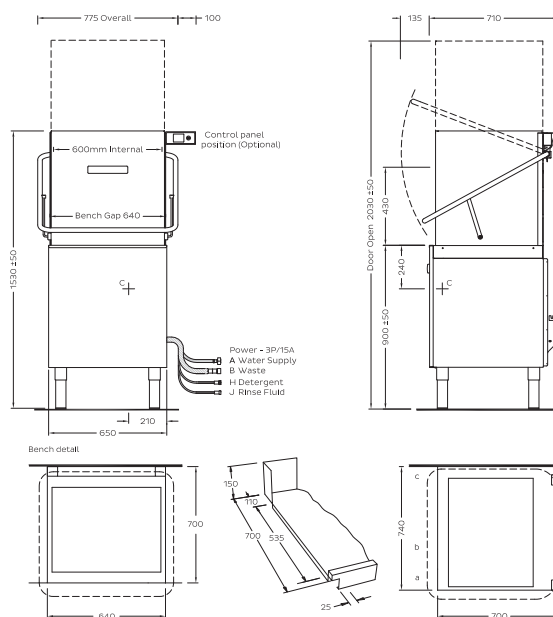

Dimensions

Width (mm)	775
Depth (mm)	710
Height (mm)	1530
Weight (kg)	125
Volume (m3)	

Machine

Width (mm)	775
Depth (mm)	710
Height (mm)	1530
Weight (kg)	125
Volume (m3)	

Packed

Width (mm)	760
Depth (mm)	820
Height (mm)	1460
Weight (kg)	146
Volume (m3)	0.91

Water Quality

pH	7
TDS	1
Cl-	100
SO4	400
Fe	0.1
Mn	0.5
Cu	0.05
Cl2	0.1

Min

pH	7
TDS	1

Max

pH	8
TDS	135
Cl-	100
SO4	400
Fe	0.1
Mn	0.5
Cu	0.05
Cl2	0.1

Corner Installation Notes:

- Machine should be installed so racks are pushed into the back of the machine.
- Allow 300mm clearance to front for service access.
- Splashback return to be no higher than 150mm.

Touchscreen Control:

- Bracket supplied with controls enables install either side, under bench or on wall.
- Consult Operator Manual for full details on correct installation.



moffat.com.au | 1300 269 801



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech ALC Series-5 / WALC0040 / Feb-25

an Ali Group Company



the spirit of excellence