

GE

Economy Undercounter Glasswasher
W 440mm x D 515mm x H 780mm

INDUSTRY
KITCHENS

www.industrykitchens.com.au 1800 611 058

The Washtech GE is a compact undercounter glasswasher that is simple to use and easy to maintain. It's compact footprint, with a width of just 440mm, makes the GE an ideal choice when space is limited.

The GE features Washtech's hybrid control system – combining IP65 stainless steel switches with tried-and-tested mechanical switchgear and a customisable electronic timer – which ensures long term durability and reliability.


Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech GE will not let you down.

Standard Features

- 60 second cycle
- Capacity of up to 540 glasses per hour
- Hot water consumption of 4.5 litres per cycle
- Compatible with 365mm glass racks
- Heavy-duty stainless steel construction
- Washtech hybrid controls
- Optional cold rinse
- Quick connection including:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - 15 amp plugset
- Lower wash/rinse arms with precision moulded jets and upper rinse jet
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

Includes:

- 1 x 365mm glass rack (K0401)



GE

MOFFAT

moffat.com.au
washtech.com.au

Moffat Pty Limited

VIC/TAS/SA

70 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au

NSW

Telephone 02-8833 4111
nswsales@moffat.com.au

QLD




Telephone 07-3630 8600
qldsales@moffat.com.au

WA

Telephone 08-9413 2400
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Version: WGE00202207

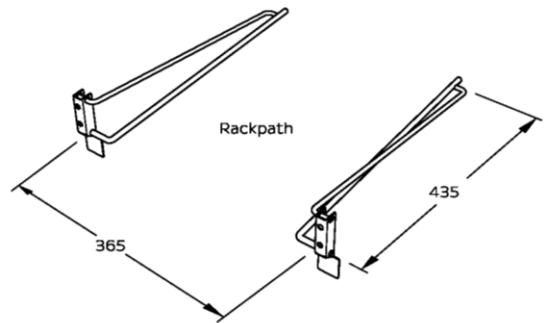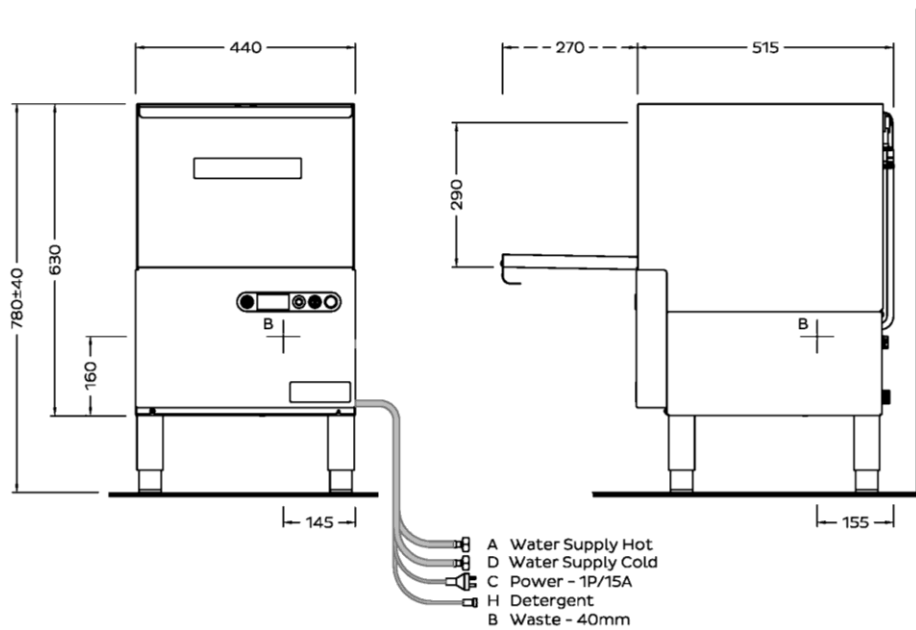

A - Hot Water

Temperature 65°C
Connection 3/4" male; hose supplied
Pressure 200-350kPa
Flow 20 litres per min
Quality Potable - refer table
Backflow Prevention AVB
Consumption 4.5 litres per cycle*

D - Cold Water (optional cold rinse)

Temperature 20°C
Connection 3/4" male; hose supplied
Pressure 200-350kPa
Flow 20 litres per min
Quality Potable - refer table
Backflow Prevention AVB

B - Waste

Connection 1.5" BSP
Line 2" BSP

C - Electrical

V	Hz	A/phase	Max kW
Single Phase 230	50	15	3.00

Dimensions

Dimensions	Machine	Packed
Width (mm)	440	480
Depth (mm)	515	570
Height (mm)**	780	740
Weight (kg)	26	39
Volume (m ³)		0.2

Water Quality

Water Quality	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl ⁻		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

* Water consumption rates may vary based on site conditions.

** Suitable for plinth installation with optional feet (C440201). Minimum height with feet is 635mm.

Isolating switch must be within 1m of, and not directly behind the machine.

Refer to operator manual for installation instructions.