

UD

UNDERCOUNTER DISHWASHER



STANDARD FEATURES

1, 2 and 3 minute cycles
 Compatible with 365mm to 500mm racks
 Wash capacity of up to 1,080 plates per hour
 Touchscreen controls providing advanced customisation
 0.5HP soft start wash pump
 Dual chemical pumps
 Hands-free drainage system with sump and drain pump
 Heavy-duty stainless steel scrap tray and waste basket
 Customisable auto-drain and self-cleaning functionality
 Adjustable tilting rack slide
 Independent wash and rinse arms
 Heavy-duty stainless steel construction

1x 500mm dish rack (600 70028)
 1x 500mm cup rack (600 70029)
 1x cutlery container (C660503)
 1x quick connection kit (all hoses and 1p/15A plugset)

SPECIFICATIONS


A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-500kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	3.37

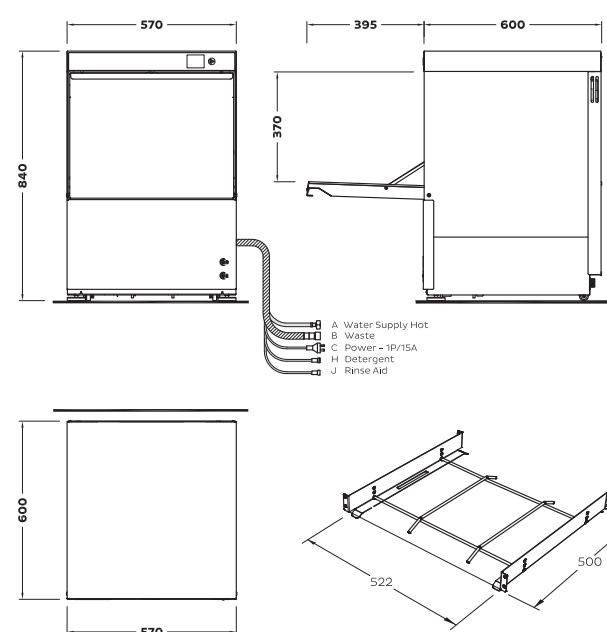

Dimensions

	Machine	Packed
Width (mm)	570	620
Depth (mm)	600	675
Height (mm)	840	940
Weight (kg)	75	78
Volume (m3)		0.39

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions

*Water consumption rates may vary based on site conditions

In line with policy to continually develop and improve its products,
 Washtech reserves the right to change specifications and design without
 notice.



moffat.com.au | 1300 269 801

WASHTECH®

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058



Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
 © Copyright Washtech Limited / Washtech UD Series-9 / WUD0040 / Feb-25

an Ali Group Company



the spirit of excellence