

XG

UNDERCOUNTER GLASSWASHER

WASHTECH®

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058




STANDARD FEATURES

- 60 and 120 second glasswashing cycles
- 1.5L per cycle water consumption
- Compatible with 365mm racks
- Washes up to 540 glasses per hour
- Washtech hybrid controls
- Hands-free auto-drain
- Dual chemical pumps
- Drain pump
- Stainless steel wash and drain filter

Includes

- 1x 365mm glassrack
- Quick connection kit (all hoses and 15A plugset)

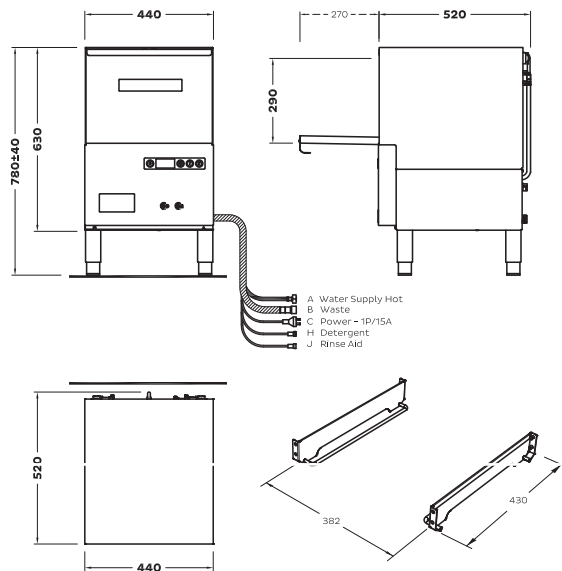

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	1.5L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

V	Hz	A/ph	Max kW	
Single phase	230-240	50	15	3.15

Dimensions

Machine	Packed	
Width (mm)	440	480
Depth (mm)	515	570
Height (mm)	780**	740
Weight (kg)	33	42
Volume (m3)		0.2

Water Quality

Min	Max	
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Water consumption rates may vary based on site conditions
 Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions

**Suitable for plinth installation with optional feet (min height is 635mm)

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moffat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
 © Copyright Washtech Limited / Washtech XG Series-5 / WXG0040 / Apr-24

an Ali Group Company



the spirit of excellence