

XU

UNDERCOUNTER DISHWASHER

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

WASHTECH®




STANDARD FEATURES

1 and 2 minute dishwashing cycles
2.2L per cycle water consumption
Compatible with 500mm racks
Washes up to 1,080 dishes per hour
Washtech hybrid controls
Hands-free auto-drain
0.5HP wash pump
Dual chemical pumps
Drain pump
Stainless steel wash and drain filter

Includes

1x 500mm dish rack (600 70028)
1x 500mm cup rack (600 70029)
1x cutlery container (C660503)
Quick connection kit (all hoses and 15A plugset)

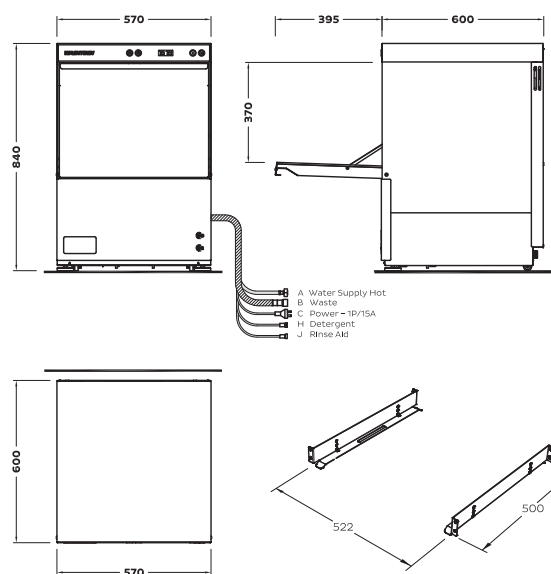

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Single phase	230-240	50	15	3.37

Dimensions

	Machine	Packed
Width (mm)	570	605
Depth (mm)	600	660
Height (mm)	840	940
Weight (kg)	54	64
Volume (m3)		0.37

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Water consumption rates may vary based on site conditions
Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products,
Washtech reserves the right to change specifications and design without
notice.



moffat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited

© Copyright Washtech Limited / Washtech XU Series-4 / WXU0040 / Apr-24

an Ali Group Company



the spirit of excellence