

XV

COMPACT UNDERCOUNTER DISHWASHER

WASHTECH®

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058



STANDARD FEATURES

- 1 and 2 minute dishwashing cycles
- 2.2L per cycle water consumption
- Compatible with 365mm to 450mm racks
- Washes up to 960 dishes per hour
- Washtech hybrid controls
- Hands-free auto-drain
- 0.5HP wash pump
- Dual chemical pumps
- Drain pump
- Stainless steel wash and drain filter

Includes

- 1x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)
- Quick connection kit (all hoses and 15A plugset)

SPECIFICATIONS

A - Hot Water




Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

Single phase	V	Hz	A/ph	Max kW
	230-240	50	15	3.37

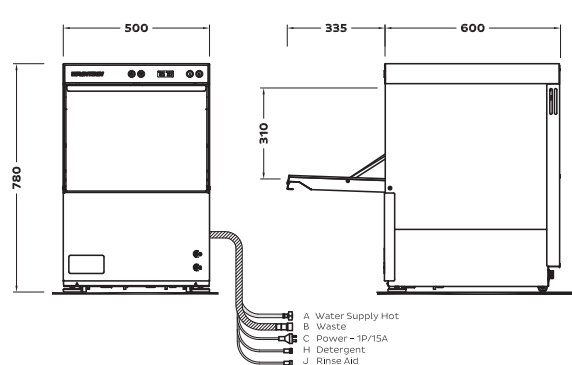

Dimensions

	Machine	Packed
Width (mm)	500	560
Depth (mm)	600	650
Height (mm)	780	915
Weight (kg)	47	57
Volume (m3)		0.33

Water Quality

	Min	Max
pH	7	8
TDS	1	135
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Water consumption rates may vary based on site conditions
Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



moffat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
© Copyright Washtech Limited / Washtech XV Series-2 / WXV0040 / Apr-24

an Ali Group Company



the spirit of excellence