



# HP1GSHC



|          |                  |
|----------|------------------|
| CATEGORY | GENERAL UPRIGHTS |
| RANGE    | <b>Pearl</b>     |
| UNIT     | REFRIGERATOR     |
| TYPE     | SELF CONTAINED   |
| DOORS    | 1                |

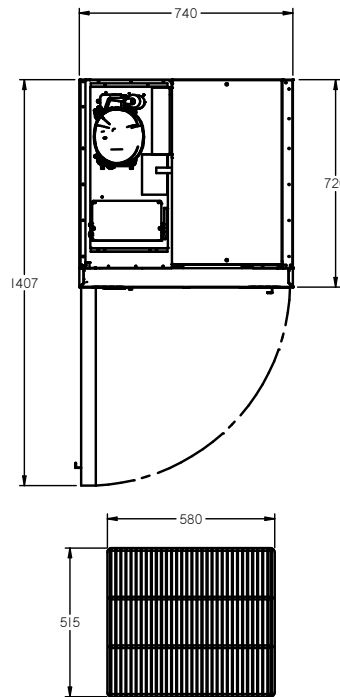

SHELF DETAIL

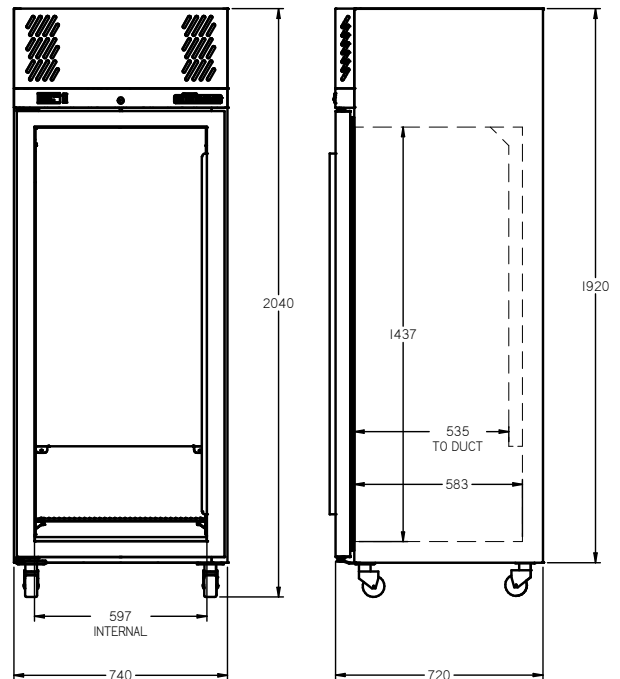

## SPECIFICATIONS

|   |                        |
|---|------------------------|
| CAPACITY LITRES                                 | 520                    |
| TEMPERATURE                                     | 1°C / 4°C              |
| DIMENSIONS - W X D X H (ON 120 MM H CASTORS) MM | 740 W x 720 D x 2040 H |
| WEIGHT UNPACKED (KG)                            | 160                    |

## STANDARD INCLUSIONS \*\*\*

|   |   |
|---|---|
| DOOR TYPE   | G (Glass Door), Optional: PT (Pass Through) |
| FINISH (INTERIOR AND EXTERIOR EXCLUDING REAR AND UNDER) | S (Stainless Steel)                         |
| SHELVES/DOOR (ADJUSTABLE STRIPS AND CLIPS)              | 4   |

## GAS TYPE

|             |      |
|-------------|------|
| REFRIGERANT | R290 |
|-------------|------|

## ELECTRICAL

|                             |        |
|-----------------------------|--------|
| POWER SUPPLY                | 10 amp |
| POWER CABLE LENGTH (METRES) | 2      |
| RUNNING AMPS                | 1.0    |

## PERFORMANCE

|                 |                     |
|-----------------|---------------------|
| KWH/24H READING | 2.29                |
| TEST STANDARD   | ISO 23953 (Display) |
| TEST CONDITIONS | 3 M1                |
| AMBIENT RATING  | 40°C                |

## REFRIGERATION WATTAGES FOR OPTIONAL REMOTE UNITS

|                                     |                |
|-------------------------------------|----------------|
| FRIDGE MODELS - GLASS DOORS (R448a) | 620 @ -5°C SST |
|-------------------------------------|----------------|

\*\*\* For **OPTIONS** refer to the current Williams Price Guide