





# HPR2SSHC



|          |                  |
|----------|------------------|
| CATEGORY | GENERAL UPRIGHTS |
| RANGE    | <b>Pearl</b>     |
| UNIT     | REFRIGERATOR     |
| TYPE     | SELF CONTAINED   |
| DOORS    | 2                |

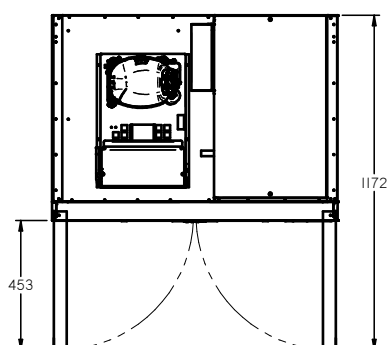

SHELF DETAIL

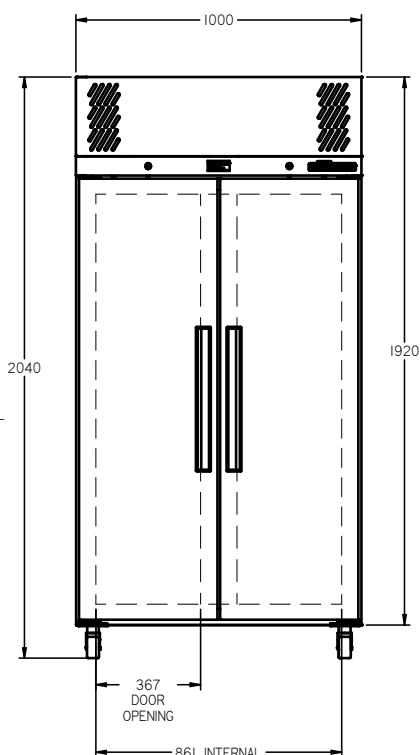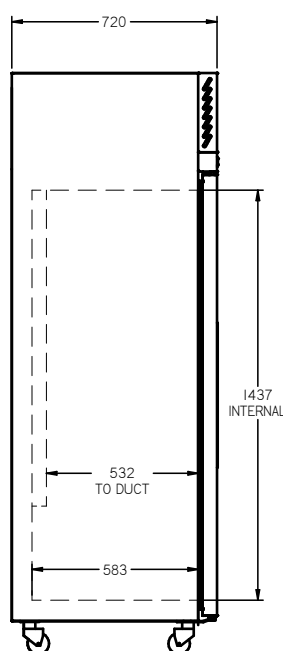

## SPECIFICATIONS

|                                                 |                         |
|-------------------------------------------------|-------------------------|
| CAPACITY LITRES                                 | 750                     |
| TEMPERATURE                                     | 1°C / 4°C               |
| DIMENSIONS - W X D X H (ON 120 MM H CASTORS) MM | 1000 W x 720 D x 2040 H |
| WEIGHT UNPACKED (KG)                            | 200                     |

## STANDARD INCLUSIONS \*\*\*

|                                                         |                                             |
|---------------------------------------------------------|---------------------------------------------|
| DOOR TYPE                                               | S (Solid Door), Optional: PT (Pass Through) |
| FINISH (INTERIOR AND EXTERIOR EXCLUDING REAR AND UNDER) | S (Stainless Steel)                         |
| SHELVES/DOOR (ADJUSTABLE STRIPS AND CLIPS)              | 4                                           |

## GAS TYPE

|             |      |
|-------------|------|
| REFRIGERANT | R290 |
|-------------|------|

## ELECTRICAL

|                             |        |
|-----------------------------|--------|
| POWER SUPPLY                | 10 amp |
| POWER CABLE LENGTH (METRES) | 2      |
| RUNNING AMPS                | 1.0    |

## PERFORMANCE

|                  |                         |
|------------------|-------------------------|
| KWH/24HR READING | 2.39                    |
| TEST STANDARD    | EN 16825 (Professional) |
| TEST CONDITIONS  | 4 M1                    |
| AMBIENT RATING   | 40°C                    |

## REFRIGERATION WATTAGES FOR OPTIONAL REMOTE UNITS

|                                     |                |
|-------------------------------------|----------------|
| FRIDGE MODELS - SOLID DOORS (R448a) | 530 @ -5°C SST |
|-------------------------------------|----------------|

\*\*\* For **OPTIONS** refer to the current Williams Price Guide