


SPECIFICATION SHEET


MODEL: CTR M

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

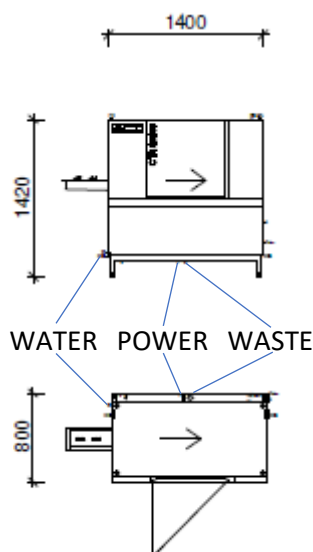

LEFT TO RIGHT

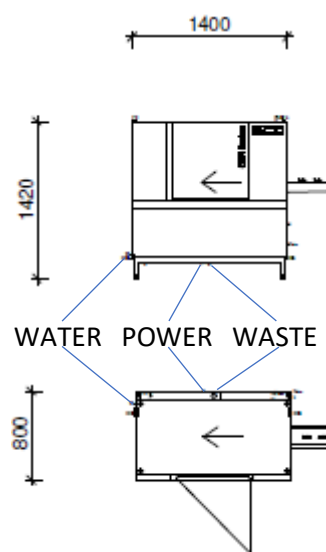

RIGHT TO LEFT

Winterhalter CTR series machines

- Completely modular - retrofittable
- Optional exhaust air heat recovery – suitable for RO water
- Active water filtration
- Zone activation
- Touch control with Wi-fi connectivity
- Tank water exchange programmes
- Active energy management system
- Speed determined rinse water consumption
- Hygiene concept
- Pivoting doors for easy access and cleaning

Machine features

Racks per hour	50 / 75 / 120 (adjustable)
Plates per hour	2160 (18 p/rack)
Glasses per hour	4320 (36 p/rack)
Heavy duty main wash	800mm long with active water filtration
Single rinse zone	600mm long
Overall dimension	1400mmL x 800mmD x 1870mmH
Clear entry height	450mm
Bench gap	1400mm

Technical Data

Water connection	HOT (Max 60C) - 19mm (3/4inch)	Final rinse pump capacity	0.55kW
Minimum flow rate	8-15 litres per minute	Rinse boiler heating	15kW or 22.5kW
Require water pressure	1-6 bar (100-600 kPa)	Rinse water consumption	130 -228 litres per hour
Machine waste point	40-50mm	Drying zone heating	No dryer
Main wash pump capacity	2.2kW	Voltage	415V 3N 50Hz
Main wash tank heating	15kW	Total connected load	29.5kW – 41 amps/phase (15kW boiler)
Main wash tank capacity	75 litres	Total connected load	37.9kW – 53 amps/phase (22.5kW boiler)
		Noise emission	◀70

Winterhalter Australia Pty Limited
Commercial Dishwashers & Systems
winterhalter.com.au

Australia
+61 2 9645 3221
sales@winterhalter.com.au

New Zealand
+64 9 973 5100
Sales@winterhalter.co.nz