



XV393

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

Project _____
Item _____
Quantity _____
Date _____

Model
CHEFLUX™

- Convection oven
- Electric
- 5 trays GN 1/1
- Hinged right (left hand door)
- Control knob



STANDARD COOKING FEATURES

Manual cooking

- **Temperature:** 80 °C – 260 °C
- Convection and humidity cooking starting from 80 °C

STANDARD TECHNICAL FEATURES

- Cooking chamber in high-resistance AISI 304 stainless steel with rounded edges
- Double glass
- Cooking chamber lighting through LED lights embedded in the door
- Tray supports with anti-tipping system
- 2-speed fan system and high-performance circular resistance

DESCRIPTION

Dry air-steam combi oven with analogical control and 304 stainless steel cooking chamber. Time, temperature, steam percentage and 2 fan speeds function. Allows to perform traditional cooking processes such as steaming, browning, grilling, frying and cooking of fresh and frozen bakery products.


ADVANCED AND AUTOMATIC COOKING FEATURES

Unox Intensive Cooking

- **DRY.Plus:** extracts humidity from the cooking chamber
- **STEAM.Plus:** creates instant humidity starting from 48 °C
- **AIR.Plus:** multiple fans with reverse gear and 2 speed settings



We reserve the right to make technical improvements - 15/12/2020

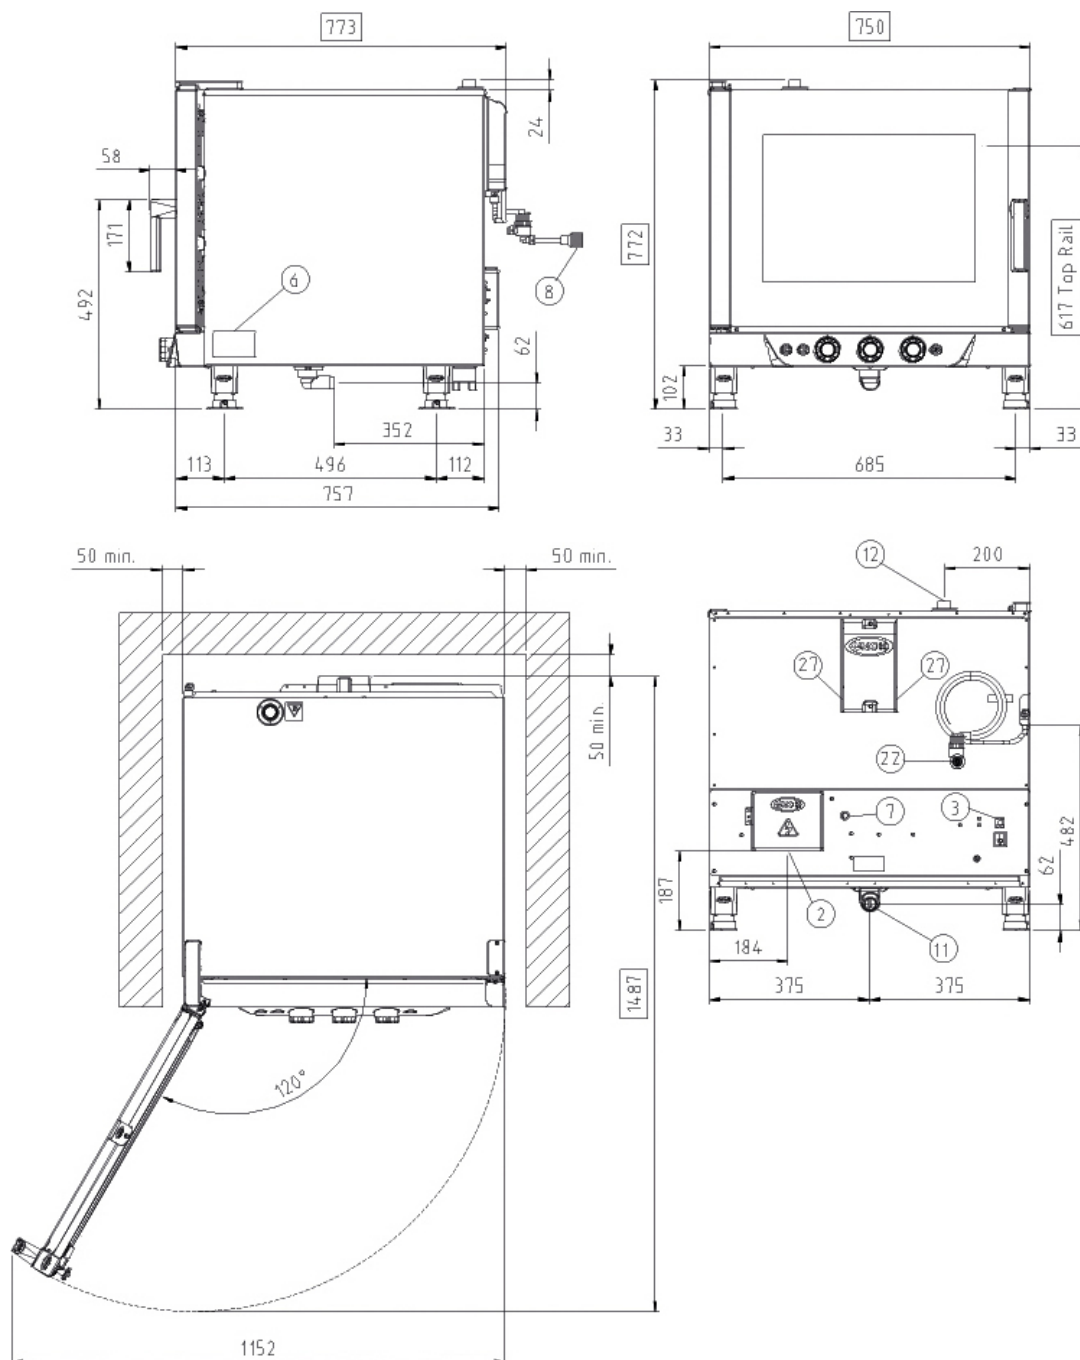

DIMENSIONS AND WEIGHT

Width	750 mm
Depth	773 mm
Height	772 mm
Net Weight	67 kg
Pan spacing	67 mm

CONNECTION POSITIONS

2	Terminal board power supply	11	Cavity drain pipe
3	Unipotential terminal	12	Hot fumes exhaust chimney
6	Technical data plate	22	Water pump inlet
7	Safety thermostat	27	Cooling air outlet

POWER AND GAS SUPPLY

STANDARD

Voltage	380-415 V
Phase	~3PH+N+PE
Frequency	50 / 60 Hz
Total power	7,1 kW
Maximum Amp Draw	11 A
Required breaker size	16 A
Power cable requirement	H07RN-F 5G 5G
Cord diameter	16 mm
Plug	NOT INCLUDED

OPTION A

Voltage	220-240 V
Phase	~3PH+PE
Frequency	50 / 60 Hz
Total power	7,1 kW
Maximum Amp Draw	18 A
Required breaker size	20 A
Power cable requirement	H07RN-F 4G 4G
Cord diameter	16 mm
Plug	NOT INCLUDED

OPTION B

Voltage	220-240 V
Phase	~1PH+PE
Frequency	50 / 60 Hz
Total power	7,1 kW
Maximum Amp Draw	31 A
Required breaker size	32 A
Power cable requirement	H07RN-F 3G 3G
Cord diameter	16 mm
Plug	NOT INCLUDED

ACCESSORIES

- **Cooking Essentials:** special trays
- **Neutral cabinet:** recommended solution to optimize your kitchen layout and always have everything in the right place
- **Stand:** the ideal support to place your oven at the perfect height to work
- **SPRAY&Rinse:** Practical spray detergent to manually clean all kinds of oven. Degreases and removes all kind of dirt
- **PURE-RO:** reverse osmosis system that eliminates Chlorides and limescale from water
- **PURE:** the filter reduces the carbonate hardness in water, thus avoiding scale deposits inside the oven cooking chamber

INSTALLATION REQUIREMENTS

Installations must comply with all local electrical systems, particularly as for minimum wire gauge required for field connection, hydraulic and ventilation supply. Exhaust and fume analysis must be performed in case of gas ovens.

Register to access data and product specifications
infonet.unox.com

