

**Modular Cooking Range Line
EVO900 2-Hot Plates Electric
Boiling Top**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**392039 (Z9ECED2Q00)**

2-hot square plates (4 kW each) electric boiling top - 400V

392165 (Z9ECED2Q0N)

2-hot square plates (4 kW each) electric boiling top - 230V

Short Form Specification**Item No.** _____

To be installed on open base installations, bridging supports or cantilever systems. Two 4 kW square cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The two 4kW cast-iron plates are hermetically sealed to the one-piece top. Hot plates with a power of 4kW for each plate.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Top configuration allows installation on ambient base only (not possible to install on refrigerated nor freezer base).
- Suitable for countertop installation.

Construction

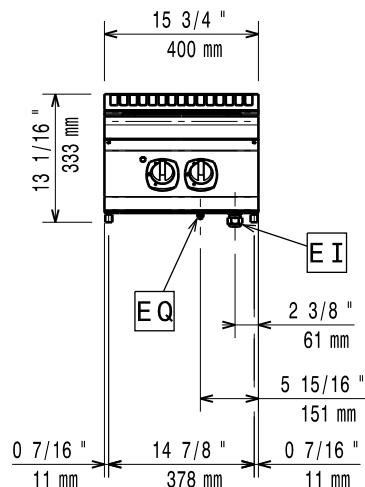
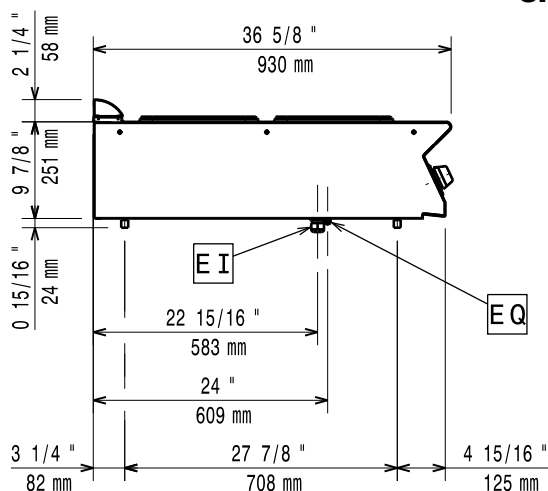
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL: _____

Optional Accessories

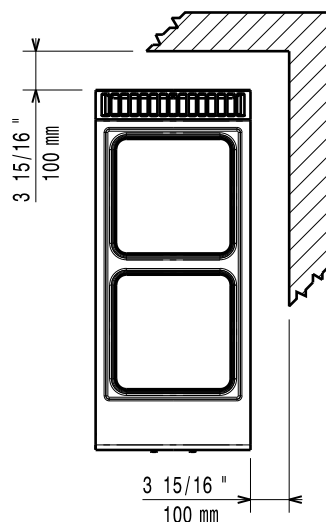
• 2 cast iron plate bars for electric cooking top	PNC 206056	☐
• Junction sealing kit	PNC 206086	☐
• Support for bridge type installation, 800 mm	PNC 206137	☐
• Support for bridge type installation, 1000 mm	PNC 206138	☐
• Support for bridge type installation, 1200 mm	PNC 206139	☐
• Support for bridge type installation, 1400 mm	PNC 206140	☐
• Support for bridge type installation, 1600 mm	PNC 206141	☐
• Support for bridge type installation, 400 mm	PNC 206154	☐
• Side handrail for right/left hand	PNC 206165	☐
• Frontal handrail 400 mm	PNC 206166	☐
• Frontal handrail 800 mm	PNC 206167	☐
• Large handrail (portioning shelf) 400 mm	PNC 206185	☐
• Large handrail (portioning shelf) 800 mm	PNC 206186	☐
• Frontal handrail 1200 mm	PNC 206191	☐
• Frontal handrail 1600 mm	PNC 206192	☐
• Water column with swivel arm (water column extension not included)	PNC 206289	☐
• Water column extension	PNC 206290	☐
• Chimney upstand, 400 mm	PNC 206303	☐
• 2 side covering panels, height 250 mm, depth 900 mm	PNC 206321	☐
• Chimney grid net, 400mm	PNC 206400	☐

Modular Cooking Range Line EVO900 2-Hot Plates Electric Boiling Top

Front

Side


EI = Electrical inlet (power)

EQ = Equipotential screw

Top


Electric

Supply voltage:

392039 (Z9ECED2Q00)

380-400 V/3N ph/50/60 Hz

392165 (Z9ECED2Q0N)

230 V/3 ph/50/60 Hz

Total Watts:

8 kW

Predisposed for:

392039 (Z9ECED2Q00)

380-400V 3N~ 50/60Hz 7,5-8kW

Key Information:

Front Plates Power: 4 - 0 kW

Back Plates Power: 4 - kW

Front Plates dimensions: 300x300

Back Plates dimensions: 300x300

Net weight: 35 kg

Shipping weight:

392039 (Z9ECED2Q00) 42 kg

392165 (Z9ECED2Q0N) 45 kg

Shipping height:

392039 (Z9ECED2Q00) 520 mm

392165 (Z9ECED2Q0N) 540 mm

Shipping width: 460 mm

Shipping depth: 1020 mm

Shipping volume:

392039 (Z9ECED2Q00) 0.24 m³

392165 (Z9ECED2Q0N) 0.25 m³

Certification group:

392039 (Z9ECED2Q00) EH92T

392165 (Z9ECED2Q0N) N9CE1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.