

**392264 (Z9STGH10GA)**

Gas solid top (10,5 kW) on gas oven (8,5 kW) - (AGA)

Main Features

- All major compartments located in front of unit for ease of maintenance.
- Durable cast iron cooking plate, easy to clean.
- Base compartment consists of a gas heated standard oven with stainless steel burners and self stabilizing flame positioned beneath the base plate. Oven chamber to have 3 levels of runners to accommodate 2/1 GN shelves (2 steam pans) and ribbed cast iron base plate.
- Central burner with optimized combustion, flame failure device and protected pilot light.
- Pans can easily be moved from one area to another without lifting.
- Temperature gradients to satisfy different cooking needs, provided over the whole plate thanks to the temperature fine-tuning by zone.
- The center of the plate can reach a maximum temperature of 500 °C while decreasing outwards.
- The special design of the control knob system guarantees against water infiltration.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Gas heated, 10.5 kW central burner, solid top.
- Piezo ignition.
- Oven thermostat adjustable from 120 °C to 280 °C.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- IPX5 water resistance certification.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- Unit is 900mm deep to give a larger working surface area.

Optional Accessories

PNC Code	Description
Chimney upstands	
206132	Draught diverter, 150 mm diameter
206133	Matching ring for flue condenser, 150 mm diameter
206246	Flue condenser for 1 module, 150 mm diameter
206304	Chimney upstand, 800 mm
206400	Chimney grid net, 400mm
Feet, wheels and ramps	
206135	4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels.
206136	Flanged feet kit
206210	4 feet for concrete installation (not for 900 line freestanding grill)
206367	Base support for feet or wheels - 800mm (EVO700/900)
Handrails	
206165	Side handrail for right/left hand
206167	Frontal handrail 800 mm
206186	Large handrail (portioning shelf) 800 mm
206191	Frontal handrail 1200 mm
206192	Frontal handrail 1600 mm
Installation solutions	
206086	Junction sealing kit
Kicking strips	
206148	Frontal kicking strip for concrete installation, 800 mm
206150	Frontal kicking strip for concrete installation, 1000 mm
206151	Frontal kicking strip for concrete installation, 1200 mm
206152	Frontal kicking strip for concrete installation, 1600 mm
206157	Pair of side kicking strips for concrete installation
206176	Frontal kicking strip, 800 mm
206177	Frontal kicking strip, 1000 mm
206178	Frontal kicking strip, 1200 mm
206179	Frontal kicking strip, 1600 mm
206180	Pair of side kicking strips
Other accessories	
927225	Pressure regulator for gas units
Panels	
206181	2 panels for service duct (single installation)
206202	2 panels for service duct (back to back installation)

PNC Code	Description
Water taps	
206289	Water column with swivel arm (water column extension not included)
206290	Water column extension
Other accessories	
206335	2 side covering panels, height 700 mm, depth 900 mm

Technical specifications


Gas

Gas Power:	19 kW
Standard gas delivery:	Natural Gas G20 (20mbar)
Gas Type Option:	LPG; Natural Gas
Gas Inlet:	1/2"


Key Information:

Oven working Temperature:	120 °C MIN; 280 °C MAX
Oven Cavity Dimensions (width):	575 mm
Oven Cavity Dimensions (height):	300 mm
Oven Cavity Dimensions (depth):	700 mm
Net weight:	171 kg
Shipping weight (gross):	167 kg
Shipping height:	1090 mm
Shipping width:	1020 mm
Shipping depth:	880 mm
Shipping volume:	0.98 m ³
Certification group:	N9TG
Solid top usable surface (width):	795 mm
Solid top usable surface (depth):	696 mm


Front

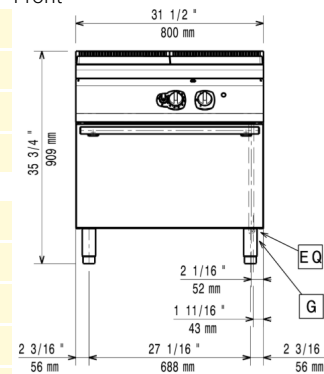

Side

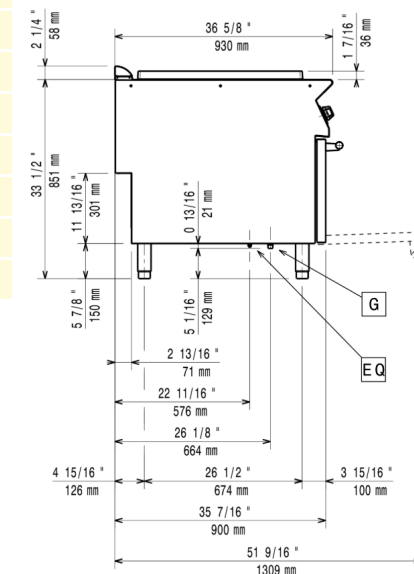

Top

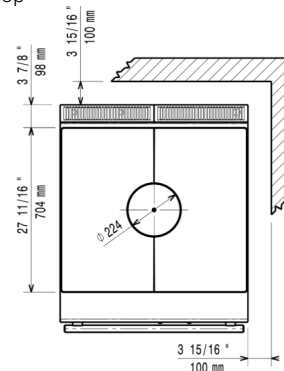

G = Gas connection
EQ = Equipotential screw

