

**Modular Cooking Range Line
EVO900 One Well Electric
Fryer 23 liter**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**392337 (Z9KKGDBAMCA)**

23-lt electric fryer with 1 "V" shaped well (external heating elements) and 2 half size baskets - free standing

392384 (Z9KKGDBAMCA)

23-lt electric fryer with 1 "V" shaped well (external heating elements), electronic control, 2 half size baskets - free standing

Short Form Specification**Item No.** _____

High efficiency external infrared heating elements (18kW) with innovative deflectors attached to the outside of the well. Deep drawn V-Shaped well. Oil drains through a tap into a container positioned under the well. Height adjustable feet in stainless steel. Exterior panels in stainless steel. Worktop in 20/10, stainless steel. Right-angled side edges eliminate gaps and possible dirt traps between units.

Main Features

- Deep drawn V-Shaped well.
- External infrared heating elements with innovative deflectors applied to the well for ease of cleaning of the internal well and safe operations.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- All major compartments located in front of unit for ease of maintenance.
- IPX5 water resistance certification.
- The special design of the control panel offers a better guarantee against oil infiltration. (only for 392337)
- External panels in Stainless Steel with Scotch Brite finish.
- Supplied as standard with 2 half size baskets and 1 right side door for cupboard.
- The special design of the control knob system guarantees against water infiltration. (only for 392384)
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Interior of well with rounded corners for ease of cleaning.
- Unit is 900mm deep to give a larger working surface area.
- Unit delivered with four 50 mm legs in stainless steel as standard.

APPROVAL: _____

Included Accessories


- 1 of Door for open base cupboard (only for 392384) PNC 206342
- 1 of DOOR FOR OPEN BASE CUPBOARD (only for 392337) PNC 206350
- 1 of 2 half size baskets for 18/23lt well fryers PNC 927223

Optional Accessories


- Stainless steel oil filter for 23 litres fryer to remove particles of grease and food residuals) - EVO900 PNC 200086 ☐
- Lid for oil container for 23 l fryers (only for 392384) PNC 200171 ☐
- Junction sealing kit PNC 206086 ☐
- 4 wheels, 2 swivelling with brake (EVO700/900). It is mandatory to install with base supports for feet/wheels. (only for 392337) PNC 206135 ☐
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, 400 mm (only for 392384) PNC 206147 ☐
- Frontal kicking strip for concrete installation, 800 mm (only for 392384) PNC 206148 ☐
- Frontal kicking strip for concrete installation, 1000 mm (only for 392384) PNC 206150 ☐
- Frontal kicking strip for concrete installation, 1200 mm (only for 392384) PNC 206151 ☐
- Frontal kicking strip for concrete installation, 1600 mm (only for 392384) PNC 206152 ☐
- Side handrail for right/left hand (only for 392384) PNC 206165 ☐
- Frontal handrail 400 mm (only for 392384) PNC 206166 ☐
- Frontal handrail 800 mm (only for 392384) PNC 206167 ☐
- Pair of side kicking strips PNC 206180 ☐
- 2 panels for service duct (single installation) (only for 392384) PNC 206181 ☐
- Large handrail (portioning shelf) 400 mm (only for 392384) PNC 206185 ☐
- Large handrail (portioning shelf) 800 mm (only for 392384) PNC 206186 ☐
- Frontal handrail 1200 mm (only for 392384) PNC 206191 ☐
- Frontal handrail 1600 mm (only for 392384) PNC 206192 ☐
- Hygienic lid for 23lt fryers PNC 206201 ☐
- 2 panels for service duct (back to back installation) (only for 392384) PNC 206202 ☐
- Frontal kicking strip for 23lt fryers in two parts PNC 206203 ☐
- Extension pipe for oil drainage for 15lt, 18lt, 23lt fryers PNC 206209 ☐
- 4 feet for concrete installation (not for 900 line freestanding grill) (only for 392384) PNC 206210 ☐
- Chimney upstand, 400 mm PNC 206303 ☐
- 2 side covering panels, height 700 mm, depth 900 mm (only for 392384) PNC 206335 ☐
- Door for open base cupboard (only for 392384) PNC 206342 ☐

- Base support for feet/wheels (lateral) for 23lt fryers and pastacookers and refrigerated bases (900) PNC 206372 ☐
- Rear paneling - 600mm (EVO700/900) (only for 392384) PNC 206373 ☐
- Rear paneling - 800mm (EVO700/900) (only for 392384) PNC 206374 ☐
- Rear paneling - 1000mm (EVO700/900) (only for 392384) PNC 206375 ☐
- Rear paneling - 1200mm (EVO700/900) (only for 392384) PNC 206376 ☐
- Chimney grid net, 400mm PNC 206400 ☐
- Sediment collection tray for 23 litres fryer (to be put in the well) - EVO900 PNC 921023 ☐
- 2 half size baskets for 18/23lt well fryers PNC 927223 ☐
- 1 full size basket for 18/23lt well fryers PNC 927226 ☐
- Unclogging rod for 23lt fryers drainage pipe PNC 927227 ☐
- Deflector for floured products for the 23lt fryer PNC 960645 ☐

Front

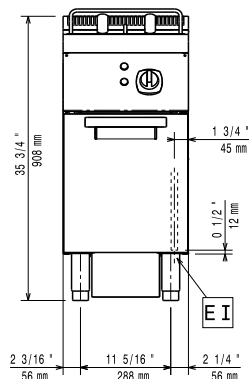


Side

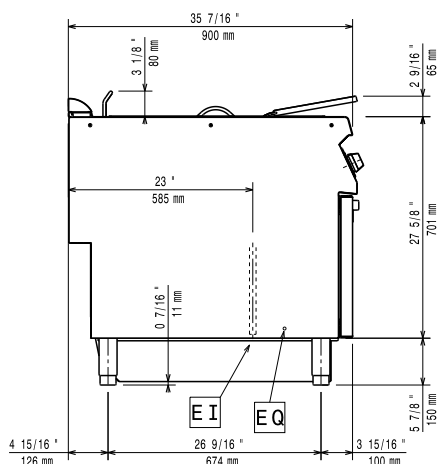

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

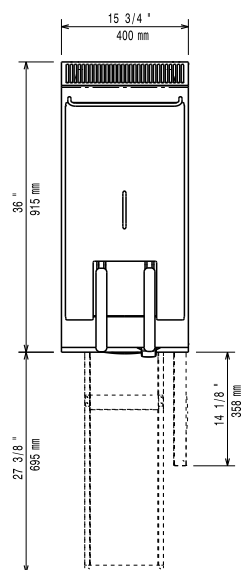

Electric

Supply voltage:

392337 (Z9KKGDBAMCA)	380-400 V/3N ph/50/60 Hz
392384 (Z9KKGOBAMCA)	415-430 V/3N ph/50/60 Hz

Total Watts:

392337 (Z9KKGDBAMCA)	18 kW
392384 (Z9KKGOBAMCA)	17.2 kW

Key Information:

Usable well dimensions (width):	340 mm
Usable well dimensions (height):	575 mm
Usable well dimensions (depth):	400 mm
Well capacity:	21 lt MIN; 23 lt MAX

Performance*:

392337 (Z9KKGDBAMCA)	37.5 kg\hr
392384 (Z9KKGOBAMCA)	35.4 kg\hr

Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight: 57 kg

Shipping weight:

392337 (Z9KKGDBAMCA)	73 kg
392384 (Z9KKGOBAMCA)	70 kg

Shipping height: 1080 mm

Shipping width: 460 mm

Shipping depth: 1020 mm

Shipping volume: 0.51 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

*Based on: ASTM F1361-Deep fat fryers

Certification group: EFE91M23