



HydroTap G5 BCSHA20 Celsius All-In-One Arc Brushed Chrome

Boiling Chilled Sparkling



Finish: Brushed Chrome

Product code: H57760Z01AU

Capacity: Commercial

Zip HydroTap Design Range CELSIUS All-In-One Boiling, Chilled & Sparkling Filtered water, plus Hot and Cold washing up water from a single tap (hot and cold water supply required). The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 3 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and a refillable CO2 cylinder. Easy to install integrated ventilation tray included.

Specifications

Product name	HydroTap G5 BCSHA20 Celsius All-In-One Arc Brushed Chrome
Product code	H57760Z01AU
Filtered water type	BCSHA
Product approvals	WaterMark, RCM, ARC
Wels rating	5 Star, 6.0 litres
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)
Chilling Technology	Air cooled technology making it 100% water efficient

Capacity, weight & dimensions

Number of people	1-20
Boiling cups per hour	100
Combined chilled and sparkling cups per hour	75

Plumbing

Water supply requirements	Cold and Hot
Water connection	1/2" BSP (G1/2)
Water valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve
Water pressure	Min 250kPa - Max 700kPa

Electrical

Power rating	1.96kW 220-240V 50Hz
Power supply	1 × 10 Amp socket outlet

Tap design

Tap	Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Brushed Chrome)
HydroTap style	Celsius All-In-One Arc
Finish	Brushed Chrome
Disability options	Unavailable

Command centre

Dimensions	W339mm x D483mm x H333mm
------------	--------------------------


Installation

Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage. The HydroTap must be installed to within the limits of the hose and cable lengths supplied.
3. **Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.**
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit


Files

Installation Layout 3D (DWG)

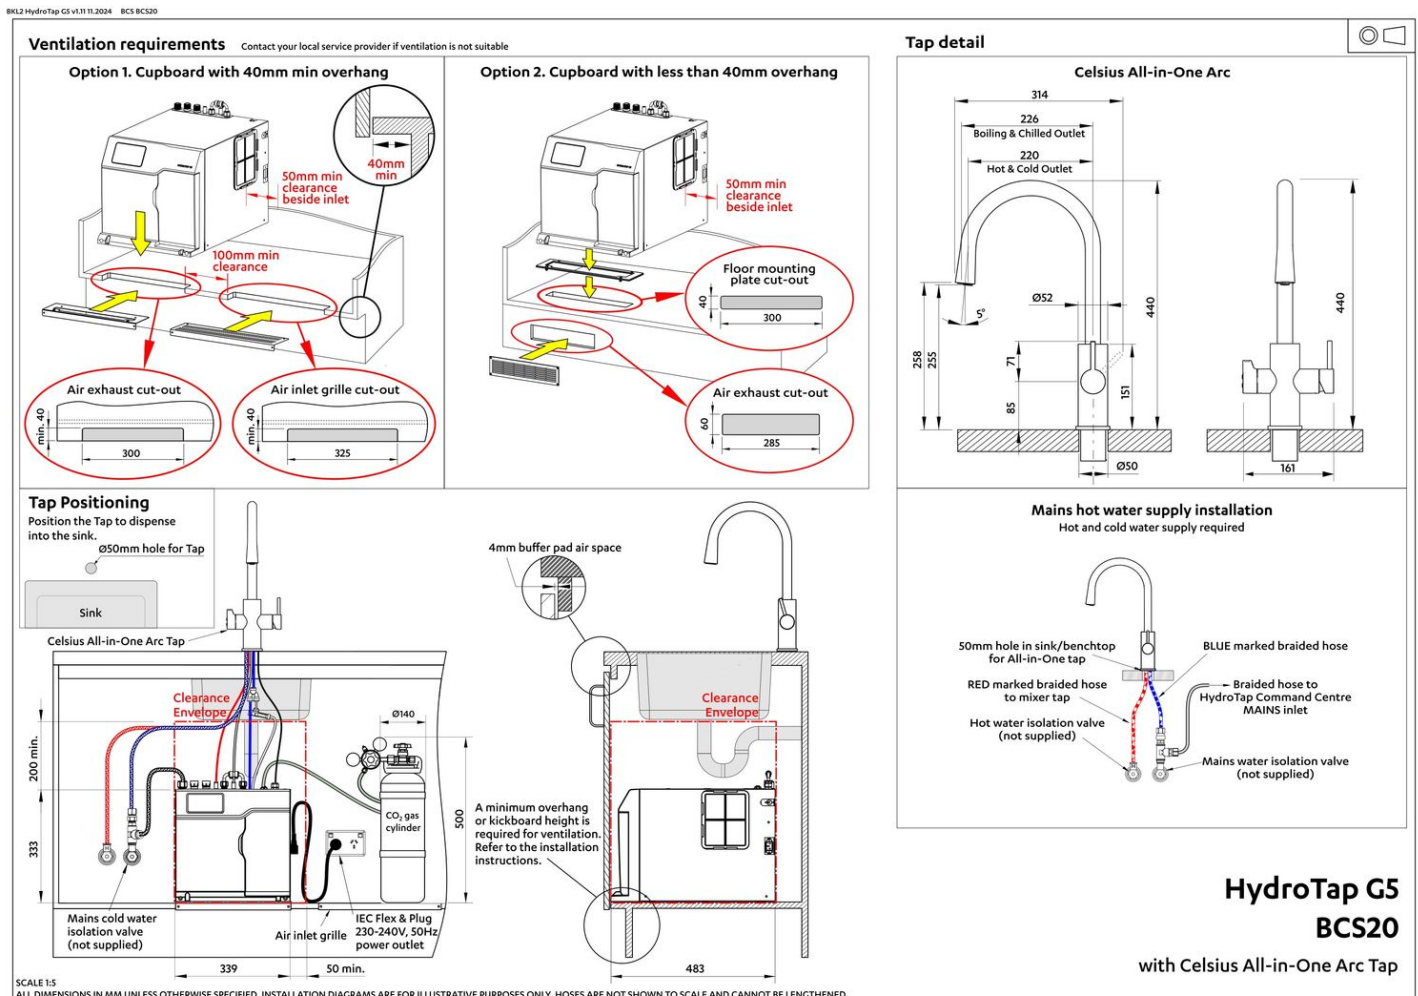

Installation Layout (PDF)

Tap Detail (DWG)

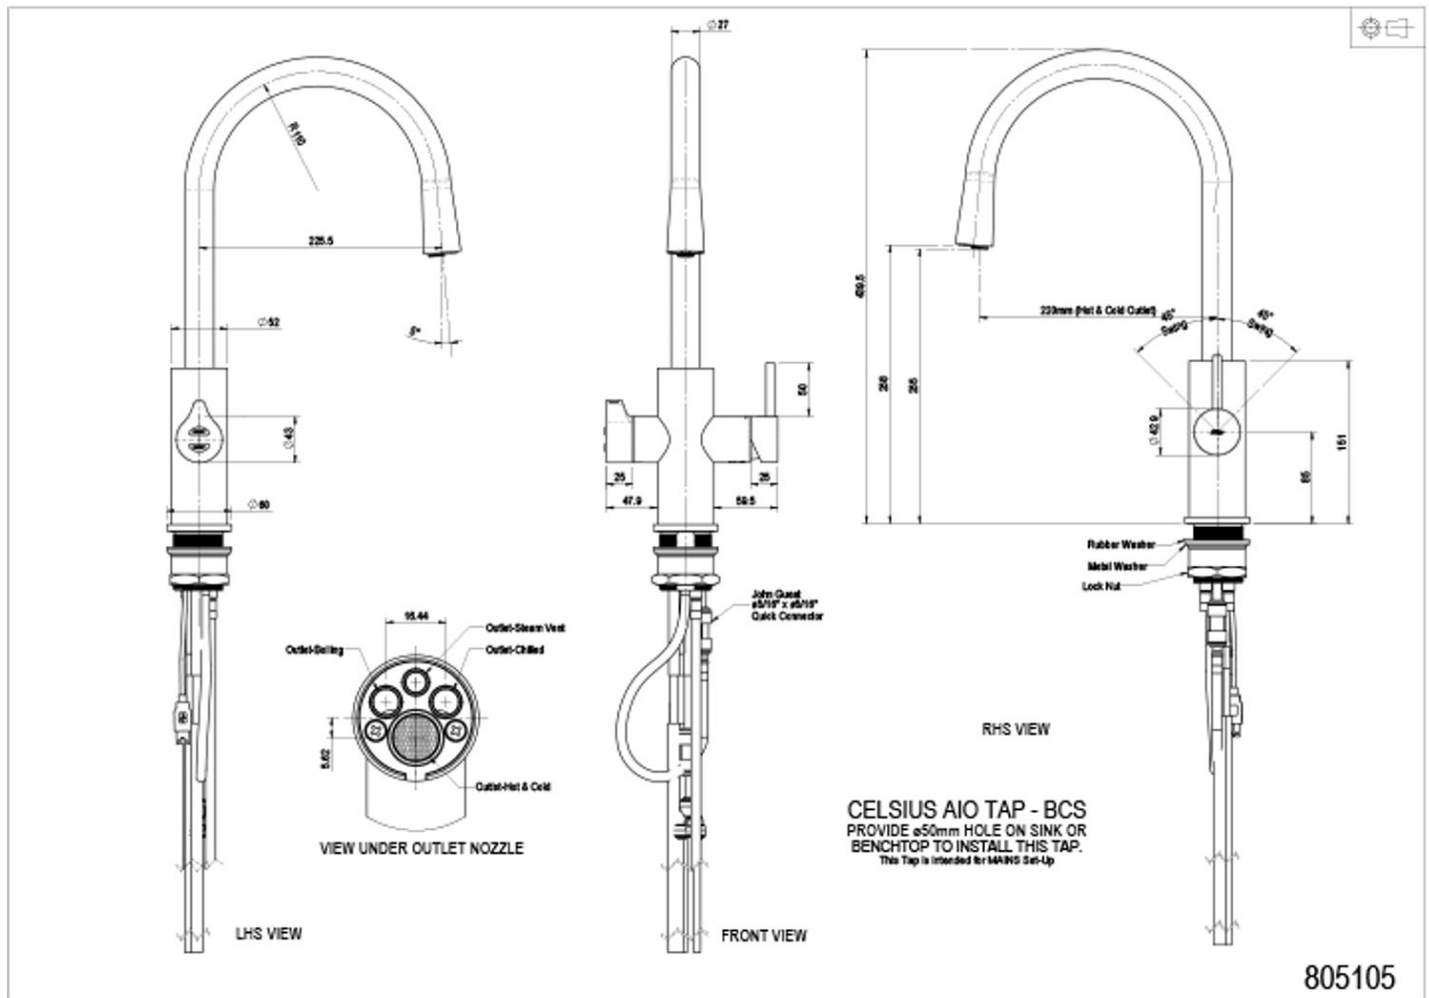

Tap Detail (PDF)

BIM files

Zip

ZIP

RVT

ArchiCAD Zip Water Library (IFC)

Revit Project File (RFA)

Revit Virtual Showroom (RVT)

Download all

Certifications



OHS
ISO 45001



Quality
ISO 9001



↓ ARC (PDF)



↓ Environment ISO (PDF)



↓ Environmental Product Declaration Brochure (PDF)



↓ EPD (PDF)



↓ Filter performance (PDF)



↓ Health & Safety (PDF)



↓ HydroTap Clean SDS (PDF)



↓ Quality ISO (PDF)

Manuals & brochures



↓ Brochure (PDF)



↓ CO₂ MSDS (PDF)



↓ Instruction manual (PDF)



↓ Quick guide (PDF)



↓ Tap operation label (PDF)



↓ User manual (PDF)

↓ Download all

Accessories



9141202

HydroTap G4 Booster Upgrade Kit