



HydroTap G5 B100 Classic Plus Chrome

Boiling



Finish: Chrome

Product code: H55707Z00AU

Capacity: Commercial

Zip HydroTap Classic Plus Boiling Filtered water tap features simple, intuitive controls including continuous flow to fill bottles, Boiling water safety lock, and antimicrobial protection impregnated within the new Classic Plus touch-pad for enhanced hygiene. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', antimicrobial protection impregnated into key water paths for enhanced hygiene, and 0.2 micron water filtration.

Specifications

| | |
|---------------------|--|
| Product name | HydroTap G5 B100 Classic Plus Chrome |
| Product code | H55707Z00AU |
| Filtered water type | B |
| Product approvals | WaterMark, RCM |
| Warranty | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |

Capacity, weight & dimensions

| | |
|-----------------------|--------|
| Number of people | 61-100 |
| Boiling cups per hour | 240 |

Plumbing

| | |
|---------------------------|--|
| Water supply requirements | Cold |
| Water connection | 1/2" BSP (G1/2) |
| Water valves | Integrated 500kPa Pressure limiting valve and Dual Check Valve |
| Water pressure | Min 200kPa - Max 700kPa |

Electrical

| | |
|----------------------|---|
| Power rating | 1.8kW 220-240V 50Hz |
| Power supply | 2 × 10 Amp socket outlets |
| Booster power rating | Zip HydroTap Booster 2.2kW 220-240V 50/60Hz |

Tap design

| | |
|----------------|--|
| Tap | Zip HydroTap CLASSIC PLUS Tap (Chrome) |
| HydroTap style | Classic Plus |
| Finish | Chrome |

Command centre

Dimensions

W280mm x D313mm x H333mm


Installation

Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a Zip Certified service technician, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.
3. Zip HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Files

Installation Layout 3D (DWG)

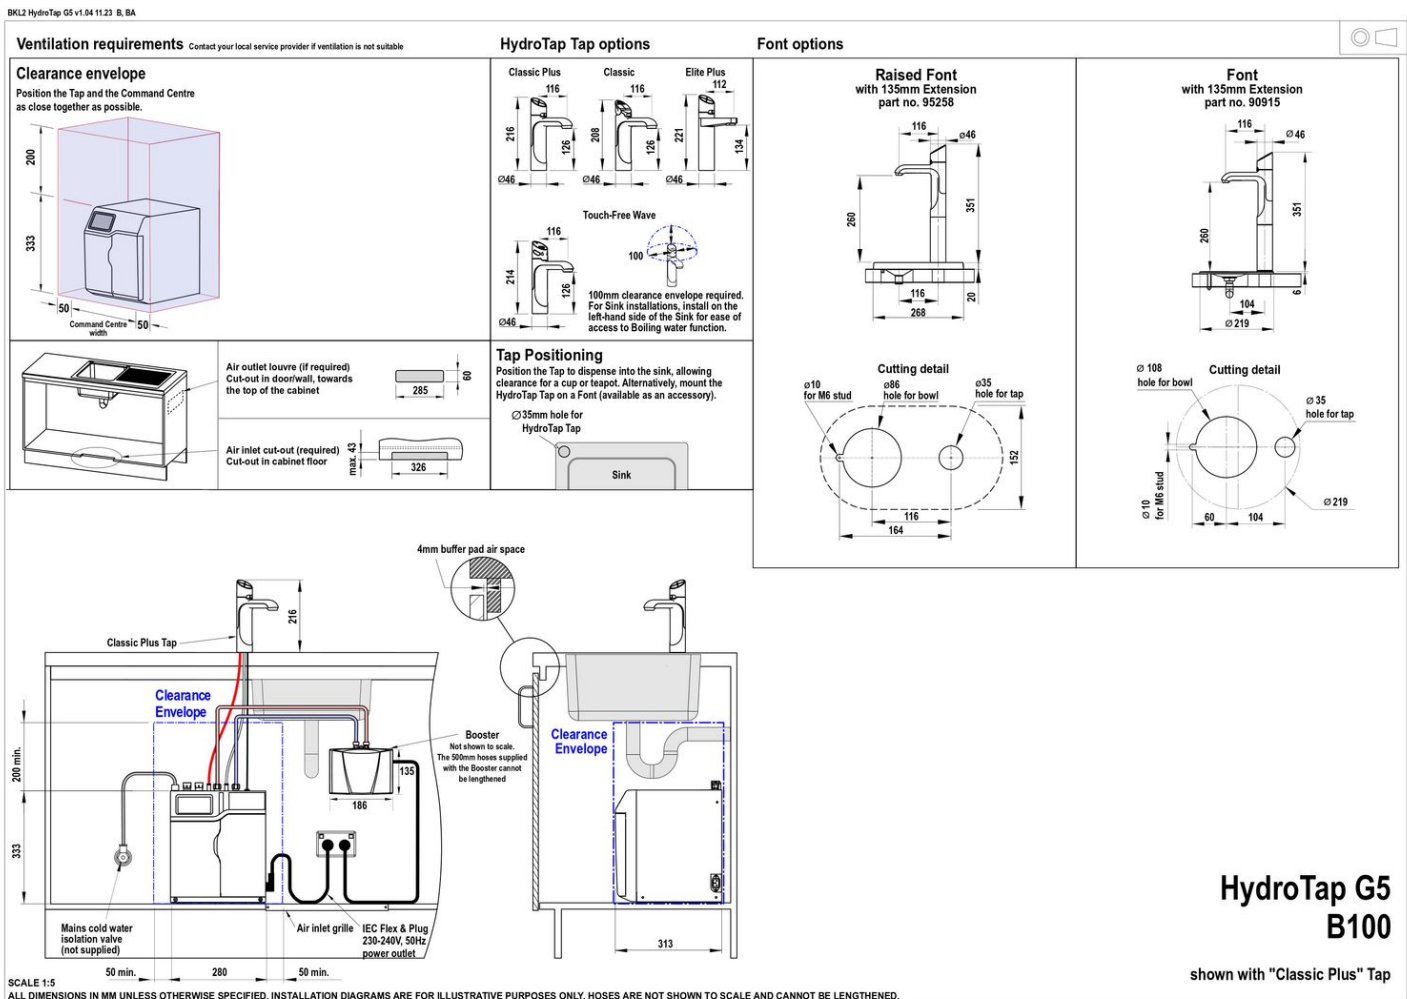

Installation Layout (PDF)

BIM files



↓ ArchiCAD Swift
Globals Library
(LCF)



↓ ArchiCAD Zip Water
Library (LCF)



↓ Revit Project File
(RFA)



↓ Revit Virtual
Showroom (RVT)

↓ Download all

Certifications



Environment
ISO 14001



Health & Safety
AS/NZS 4801



Quality
ISO 9001



↓ Environment ISO
(PDF)



↓ Environmental
Product Declaration
Brochure (PDF)



↓ Filter performance
(PDF)



↓ Health & Safety
(PDF)



↓ Quality ISO (PDF)

Manuals & brochures



 Brochure (PDF)



 Instruction manual (PDF)



 Quick guide (PDF)



 Tap operation label (PDF)



 User manual (PDF)

 Download all