



HydroTap G5 BCHA60 4-in-1 Classic Plus tap with Cube Mixer Chrome

Boiling Chilled



Finish: Chrome

Product code: H55923Z00AU

Capacity: Commercial

Zip HydroTap Classic Plus 4 in 1 Boiling, Chilled, Filtered water plus Hot and Cold washing up water from two separate taps. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration. Easy to install integrated ventilation tray included.

Specifications

| | |
|---------------------|--|
| Product name | HydroTap G5 BCHA60 4-in-1 Classic Plus tap with Cube Mixer Chrome |
| Product code | H55923Z00AU |
| Filtered water type | BCHA |
| Product approvals | WaterMark, RCM, ARC |
| WELS rating | 5 Star, 6 litres |
| Warranty | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |

Capacity, weight & dimensions

| | |
|-----------------------|-------|
| Number of people | 41-60 |
| Boiling cups per hour | 160 |
| Chilled cups per hour | 175 |

Plumbing

| | |
|---------------------------|--|
| Water supply requirements | Cold |
| Water connection | 1/2" BSP (G1/2) |
| Water valves | Integrated 500kPa Pressure limiting valve and Dual Check Valve |
| Water pressure | Min 300kPa - Max 700kPa |

Electrical

| | |
|--------------|--------------------------|
| Power rating | 2.1kW 220-240V 50Hz |
| Power supply | 1 × 10 Amp socket outlet |

Tap design

| | |
|-----------------|--|
| Tap | Zip HydroTap CLASSIC PLUS Tap (Chrome) |
| HydroTap style | Classic Plus |
| Mixer tap style | Cube |
| Finish | Chrome |

Command centre

Dimensions

W395mm x D487mm x H333mm


Installation

Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
3. **Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.**
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

Files

Installation Layout 3D (DWG)

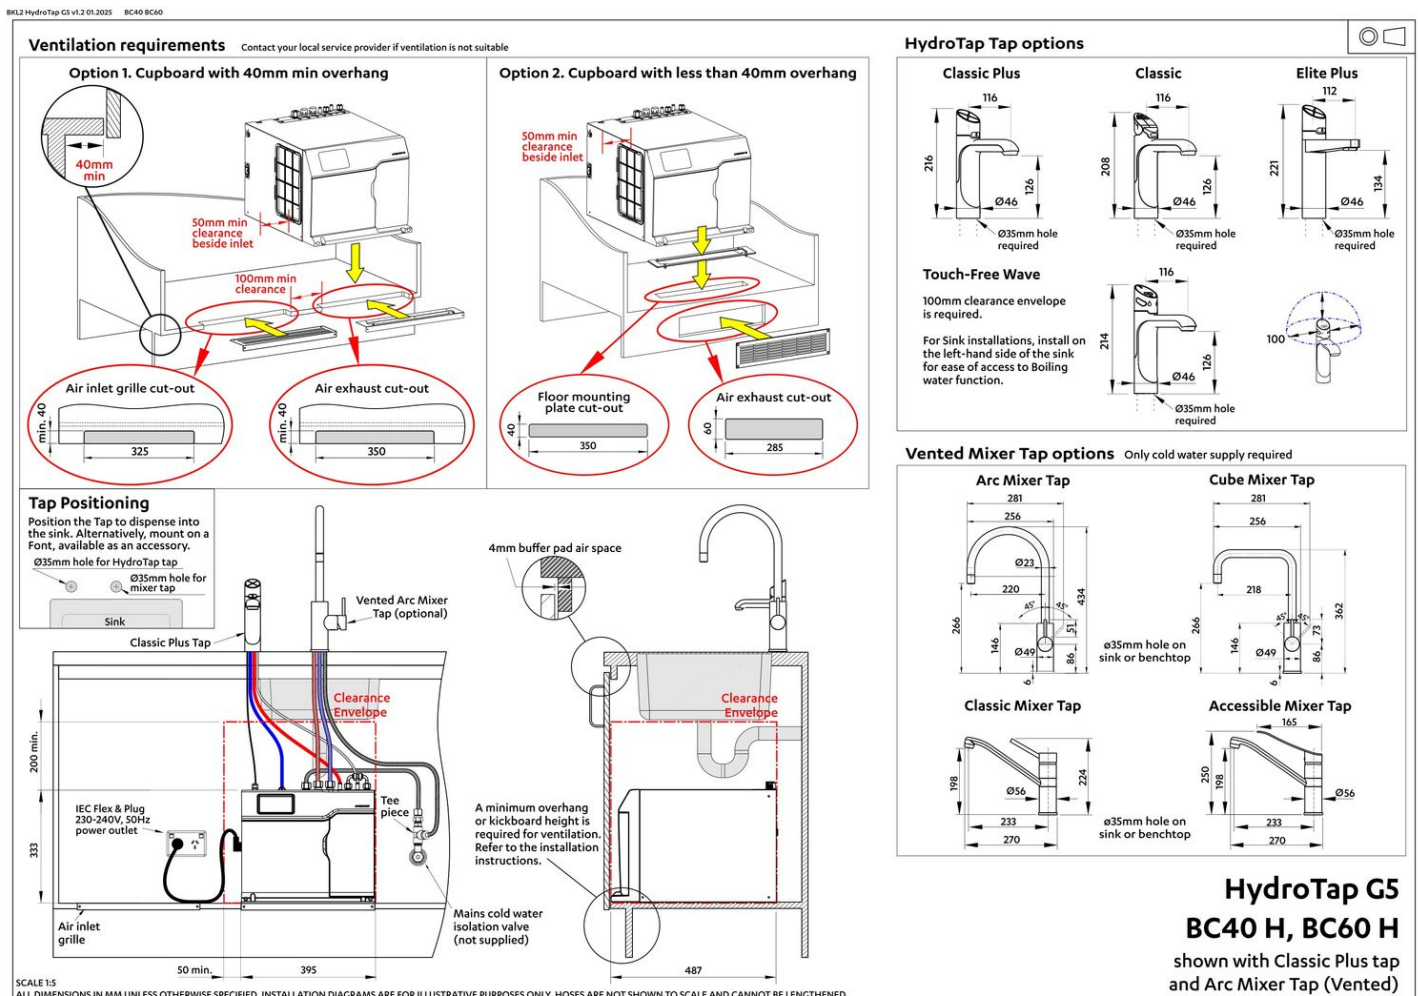

Installation Layout (PDF)

BIM files



↓ ArchiCAD Swift
Globals Library
(LCF)



↓ ArchiCAD Zip Water
Library (LCF)



↓ Revit Project File
(RFA)



↓ Revit Virtual
Showroom (RVT)

↓ Download all

Certifications



Environment
ISO 14001



Health & Safety
AS/NZS 4801



Quality
ISO 9001



↓ ARC (PDF)



↓ Environment ISO
(PDF)



↓ Environmental
Product Declaration
Brochure (PDF)



↓ Filter performance
(PDF)



↓ Health & Safety
(PDF)



↓ HydroTap Clean
SDS (PDF)



↓ Quality ISO (PDF)

Manuals & brochures



 Brochure (PDF)



 Instruction manual (PDF)



 Quick guide (PDF)



 Tap operation label (PDF)



 User manual (PDF)

 Download all