



CR.BB.V.AG.RB.PC.3

Back Bar Refrigerators Refrigerated

Vertical



Product Code:

- CR = Culinaire Refrigerated
- BB = Back Bar
- V = Vertical
- AG = Aluminium Framed Glass
- RB = Remote Control Box
- PC = Powder Coated
- 3 = 3 Door

Optional Extras:

Frameless Glass Doors

- Add FG to code CR.BB.V.FG.RB.PC.3

Stainless Steel Framed Glass Doors, Continuous Folded Handle

- Add SG to code CR.BB.V.SG.RB.PC.3

Stainless Steel Framed Glass Doors, Recessed Handle

- Add SGR to code CR.BB.V.SGR.RB.PC.3

Equipment Legs

- Add EL to code CR.BB.V.AG.RB.EL.PC.3
- Factory fitted

(If Required, must be nominated at time of order)

Left Hand Services

Remote Service Compartment

- Add L to code CR.BB.V.AG.RBL.PC.3

Self Contained

Top Mounted Service Compartment

- Add SCT to code CR.BB.V.AG.SCT.PC.3

Bottom Mounted Service Compartment

- Add SCB to code CR.BB.V.AG.SCB.PC.3

Technical Data:

- Dimensions: W x D x H: 1670 x 700 x 1900
- * Remote Refrigeration Load: 2200 watts at -10°C SST
- Refrigerant Type: R507 or 404A
- Pipe Connection Inlet: 1/2"
- Pipe Connection Outlet: 1/4"
- Total Connected Load: 0.6kW
- Electrical Connection: 240V 1Ø + N + E

Note: Refrigeration load is calculated at the cabinet

Due to continuous product research and development, the information contained herein is subject to change without notice

Product Information:


- Keeps contents at a cool +1°C to +4°C in 32°C ambient temperature
- Air blown from rear to front over a full length cross fin coil to ensure maximum recovery and even temperature in the busiest environments
- High impact, low energy L.E.D. lighting ensures maximum product visibility
- Aluminum framed low energy double glazed, heated and toughened glass doors are self-closing and self-sealing to ensure ease of operation & improved efficiency (as standard)
- Serviceable heater wire in cabinet fascia to prevent condensation
- Choice of either stainless steel or black internal and external finishes (as standard)
- All doors are left hand hinged with hold open stays, as standard. Contact your local sales rep for other door configurations
- The refrigerator is plinth mounted as standard. 150mm equipment legs available as an optional extra, must be specified at the time of ordering
- All services are at the right hand end of the refrigerator as standard. Can be ordered as left hand by adding "L" to code (refer left hand services)
- Supplied with 6 adjustable shelves per door
- Available in 2-6 doors
- Supplied with a control box for connection to a remote condenser unit to be supplied separately and connected by a qualified refrigeration contractor and electrician
- Condensate is to be plumbed to waste

Self Contained Refrigerators (contact your Stoddart representative)


- Self contained refrigerators are available in 2 & 3 doors
- Available in either top mounted or bottom mounted unit compartments
- Condensate is to be plumbed to waste



Plan View

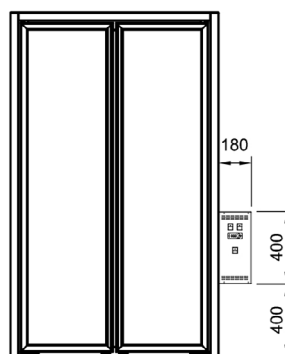

Front Elevation

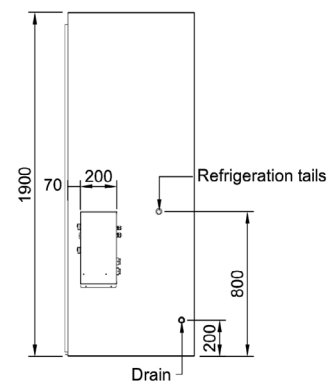

End Elevation



Proudly Manufactured in Australia

Manufactured By:

Tom Stoddart Pty Ltd. ABN 16 009690251
 39 Forest Way, Karawatha 4117 Queensland Australia
 Tel : +61 7 3440 7600 Fax : +61 7 33441000
 Web site: www.stoddart.com.au

