

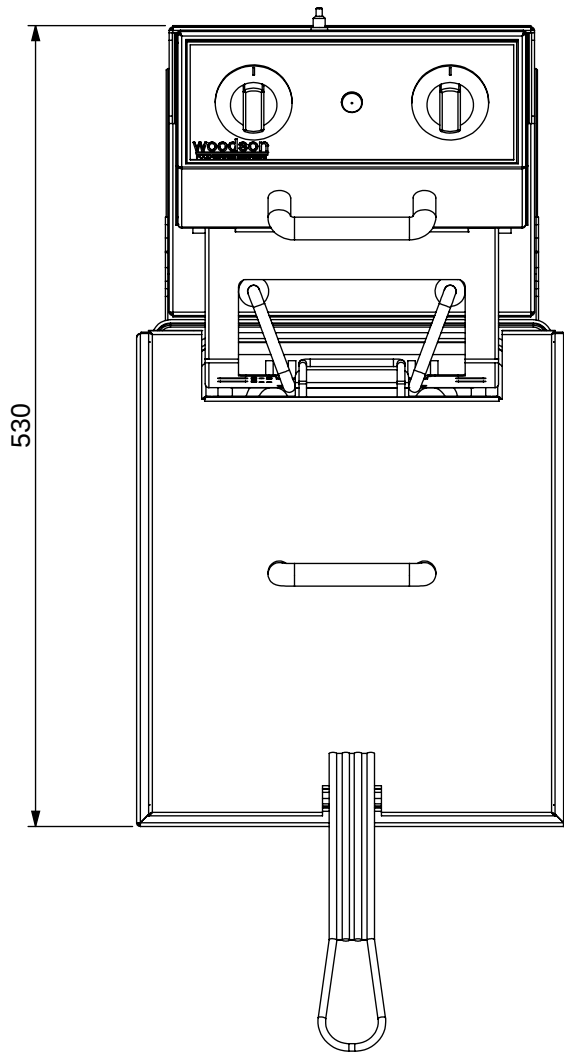
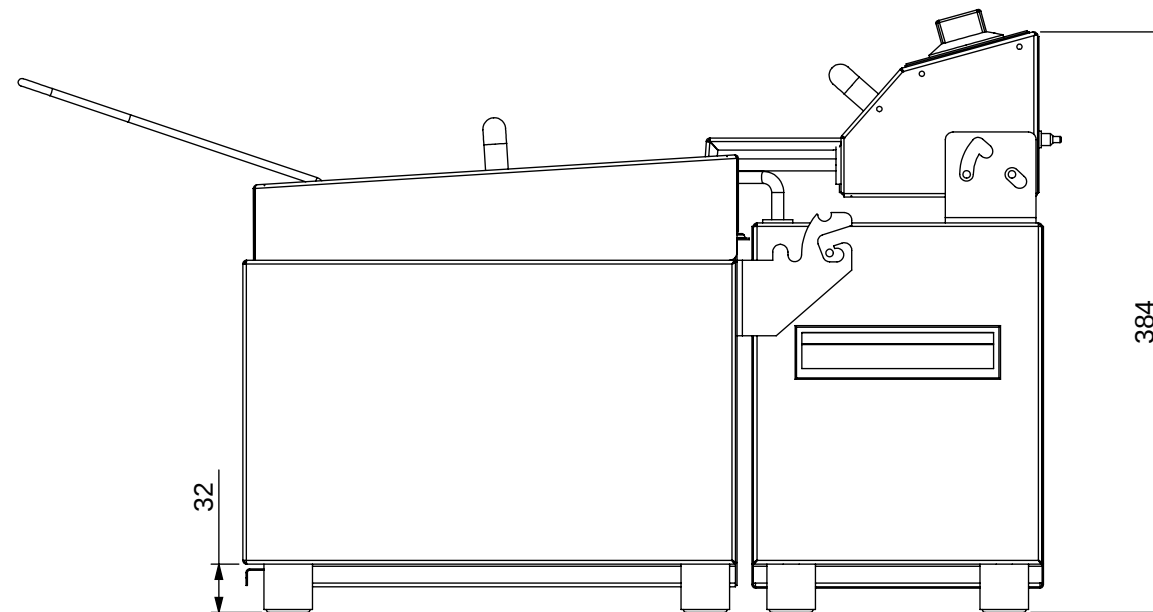


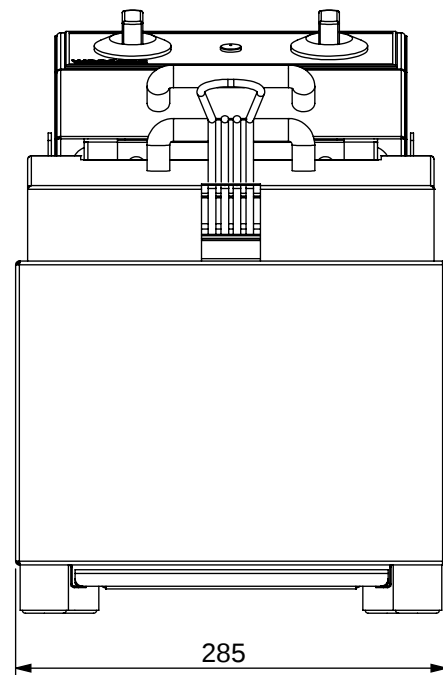

Product Details


Electrical Connection : Supply single phase
: 240v, 15amps, 2900w, 15amp plug & lead supplied
: 1 element @ 2900w (240V)
Pan Size : 1/2 x 200 deep, 1 of
Unit Controls : Knob with 205deg thermostat and indicator light
: Reset button for 238deg thermal overload
: 15 min Timer

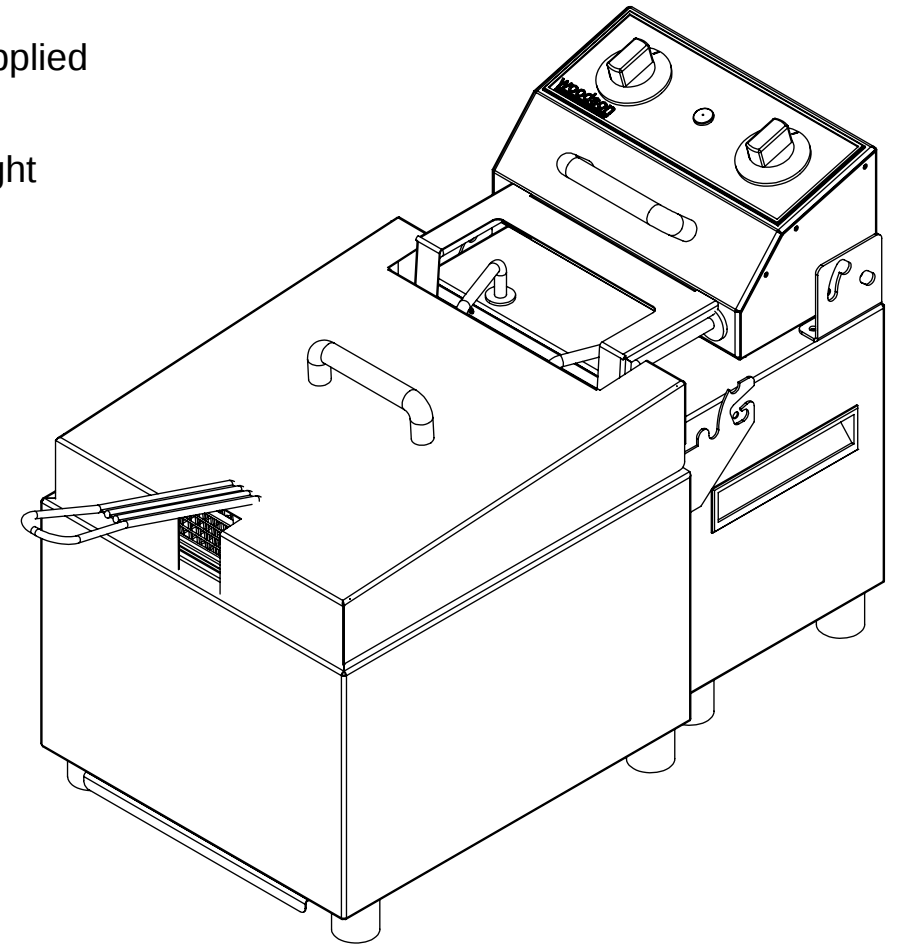

REV/VER.	REVISED BY	DATE	REVISION DESCRIPTION	STATUS
B2	N Wooler	15/03/2013	Part -p11 has changed. Refer to the drawing of that part for details.	For Manufacture
B1	N Wooler	14/02/2013	Relay added. Switch timer replaced with a standard timer. Sheetmetal parts have changed to revision B. Refer to the drawing sheet of each part for details of changes.	For Manufacture
A	C Booth	22/02/2007	Original design.	For Manufacture



STODDART
MANUFACTURING
TOM STODDART Pty Ltd
ACN 009 690 251
www.stoddart.com.au

					PART No: WFAS80 B2		
	NAME	SIGNATURE	DATE	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	DESCRIPTION: AutoLift Fryer 8L		
DRAWN	C Booth		22/02/2007				
APPV'D				MATERIAL:	DWG No: WFAS80-d01 B2		
Weight:				THICKNESS:			
Surface Area:				FINISH:			
DO NOT SCALE DRAWING		This drawing remains the property of Tom Stoddart Pty Ltd & cannot be reproduced without prior permission.				A3	Sheet 1 of 42

File Location: G:\03_Engineering\Woodson\SP-W-FAS80 AutoLift Pan Fryer\01_Solidworks\