


200 Series

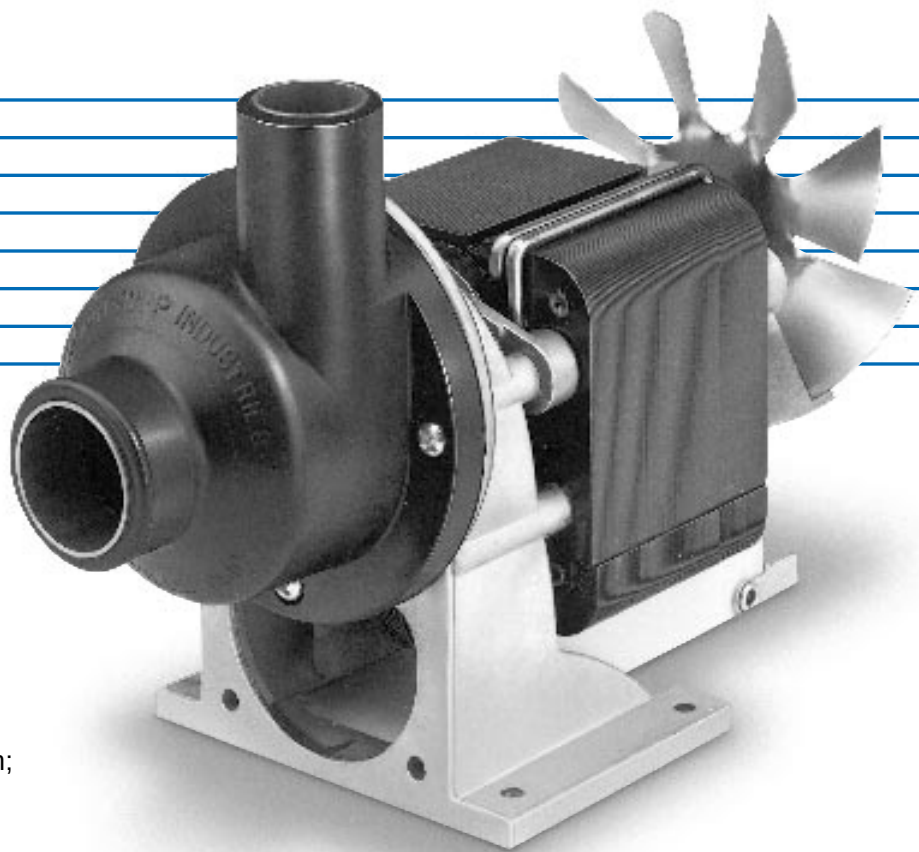

Pump Specifications:


Flow Rates — Range to 13 gpm;
maximum head
9.7 feet

Motor — 115V, 60 Hz
Open, shaded pole

**Fluid
Temperature** — To 180°F (82°C)

Materials in Contact with Solution:

Body — Polyethylene
Impeller — Polyethylene
Seal — Nitrile lip seal

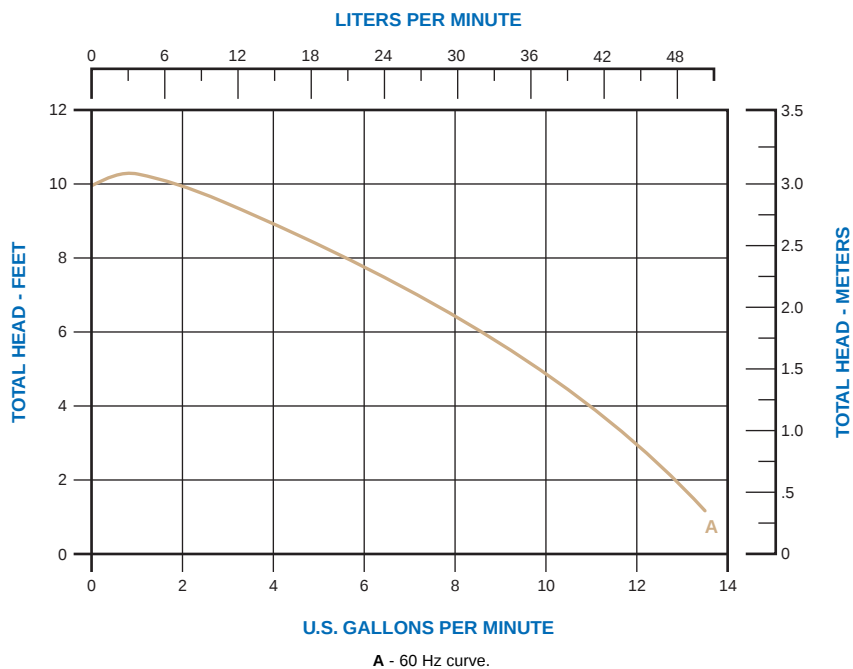


MODEL SPECIFICATIONS

Model Number	Series	Seal	Volts	Hz	Amps	Motor Type	Shell	Typical Curve		Approx. Wt.
								50 Hz	60 Hz	
15901-001	200	Lip	115	60	2.4	SP	Open	—	A	4.0 lbs.
15952-001	Same as 15901-001 except with 6' cord and cover									

CENTRIFUGAL PUMPS - TYPICAL DIMENSIONS

200 Series Model

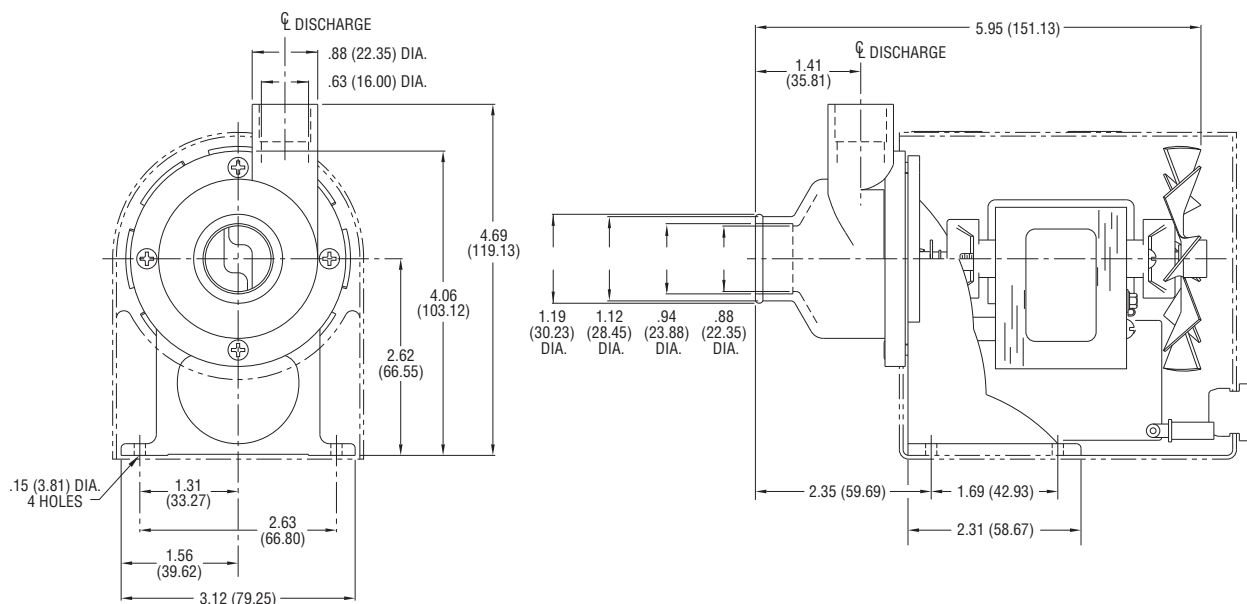

Dimensions in Inches
(Dimensions in Millimeters)

OEM Options

Body —

- a. Buna N
- b. Bronze
- c. Stainless Steel
- d. Noryl®
- e. Nitrile

Impellers —

- a. Buna N
- b. Phenolic
- c. Bronze
- d. Stainless Steel
- e. Noryl®

Seals —

- a. Buna N lip seal
- b. Carbon vs. 316 Stainless Steel with Kel-F®, Viton®/Fluoroelastomer, Brass and 302 Stainless Steel components
- c. Carbon vs. 316 Stainless Steel with Polyethylene, Brass and 302 Stainless Steel components
- d. Carbon vs. 316 Stainless Steel with Silicone, Brass and 302 Stainless Steel components

Motors —

- a. 115V, 50/60 Hz
- b. 230V, 50 Hz
- c. 230V, 50/60 Hz
- d. Pedestal models (no motor)