

2T-T2T Series | Screwplug



DURABLE, EFFICIENT CHEMICAL HEATER

Durable, efficient, chemical, screwplug heater in 316 stainless steel or titanium elements for use in most aqueous alkaline solutions and rinse tanks. 2 inch. 2000-15000 watts, 240-480 volts.



2T-T2T

FEATURES

For use in most aqueous alkaline solutions and rinse tanks. Check solution recommendation chart with your chemical supplier for proper sheath material selection.

Heavy wall metal sheaths and screwplug in 316 stainless steel and titanium.

Watt densities up to 45-55 watts per square inch for 316 stainless steel and <60 watts per square inch for titanium ensure long life service.

Vapor tight, flame retardant PVC enclosure.

Temperature and level controls sized to match the heater.

Lower watt densities for highly viscous solutions.

2T SERIES, 2" (STAINLESS STEEL) SCREW PLUG HEATERS

WATTS	VOLTS	OVERALL LENGTH In./mm	PIPE THREAD	NO. OF ELEMENTS	MODEL NUMBER	SHIP WGT. Lbs./kg
2000	240	8	2	2	2T2208	5
480	480	(203)			2T2408	(2.3)
3000	240	12	2	2	2T3212	6
480	480	(305)			2T3412	(2.7)
4000	240	18	2	2	2T4218	7
480	480	(457)			2T4418	(3.2)
6000	240	25	2	2	2T6225	8
480	480	(635)			2T6425	(3.6)
8000	240	32	2	2	2T8232	10
480	480	(813)			2T8432	(4.5)
10000	240	40	2	2	2T10240	11
480	480	(1016)			2T10440	(5)
12000	480	48	2	2	2T12448	13
		(1219)				(5.9)
15000	480	54	2	2	2T15454	15
		(1372)				(6.8)

T2T SERIES, 2" (TITANIUM) SCREW PLUG HEATERS

WATTS	VOLTS	OVERALL LENGTH In./mm	PIPE THREAD	NO. OF ELEMENTS	MODEL NUMBER	SHIP WGT. Lbs./kg
2000	240	8	2	2	T2T2208	5
480	480	(203)			T2T2408	(2.3)
4000	240	18	2	2	T2T4218	7
480	480	(457)			T2T4418	(3.2)
6000	240	25	2	2	T2T6225	8
480	480	(635)			T2T6425	(3.6)
8000	240	32	2	2	T2T8232	10
480	480	(813)			T2T8432	(4.5)
12000	480	48	2	2	T2T12448	13
		(1219)				(5.5)



Watts:
2,000 watts to
15,000 watts.




240 or 480 Volts
208, 380, 415, 600
and other voltages
available

2T & T2T Screwplug Heater

SPECIFICATIONS

Wattages	2,000 Watts to 15,000 Watts
Voltages	240 volts to 480 volts
Options	Special configurations & lengths Thermowells Explosion resistant enclosures Carbon Steel or incoloy elements Integral thermostats
Safety Features	Grounded construction

DIMENSIONS

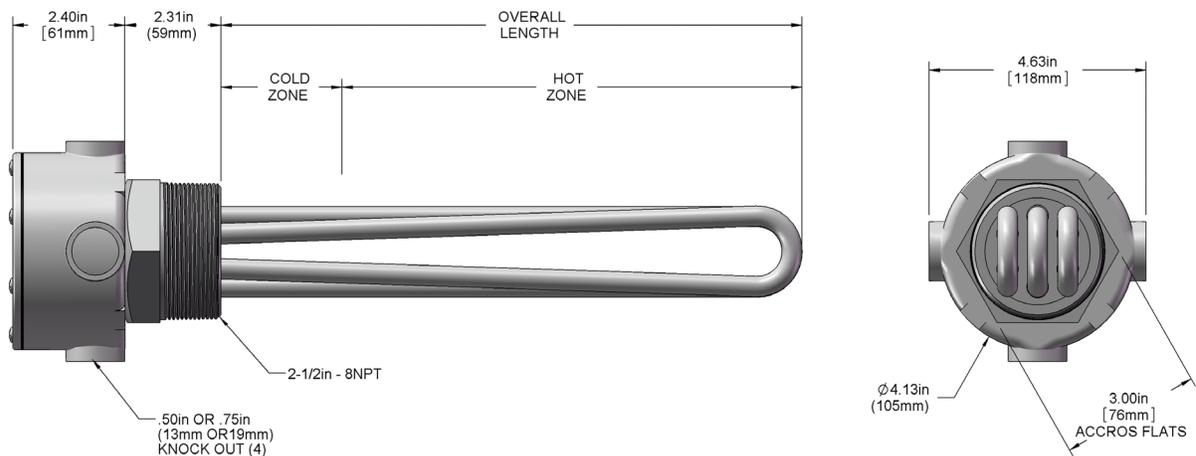

MODEL NUMBER BREAKDOWN

Series	Wattage	Voltage	Overall Length	Phase
2T = 316 stainless steel	2 = 2000	1 = 120	8 = 2kW	no designator = Single phase (std)
T2T = titanium	3 = 3000	2 = 240	12 = 3kW	-3 = three phase power (three elements)
IN2T = incoloy	4 = 4000	3 = 380	18 = 4kW	-M2 = explosion/moisture resisting housing
	6 = 6000	4 = 480	25 = 6kW	-W = thermowell
	8 = 8000	5 = 415	32 = 8kW	-T = intergral thermostat
	10 = 10000	6 = 600	40 = 10kW (SS only)	
	12 = 12000	7 = 400	48 = 12kW	
	15 = 15000	8 = 208	54 = 15kW (SS only)	
		9 = 220		
		0 = 200		