


SALES AND ENGINEERING DATA

PD30A-XXX-XXX-CXXX / PD30S-XXX-XXX-CXXX
PE30A-XXX-XXX-CXXX / PE30S-XXX-XXX-CXXX
PZ30A-XXX-XXX-CXXX / PZ30S-XXX-XXX-CXXX
3" METALLIC DIAPHRAGM PUMP

RATIO SERIES:	1:1
FLUID PSIG RANGE:	20 - 120
RELEASED:	2-9-05
REVISED:	6-17-22
(REV: K)	S-1340

SPECIFICATIONS

CONSTRUCTION		PERFORMANCE	
Model Series.....	PX30A-XXX-XXX-CXXX PX30S-XXX-XXX-CXXX	Air Inlet Pressure Range	20 - 120 psig (1.4 - 8.3 bar)
Pump Type.....	Metallic, Air Operated, Double Diaphragm	Maximum Material Inlet Pressure... ..	10 psig (0.69 bar)
Ratio.....	1:1	Fluid Outlet Pressure Range	20 - 120 psig (1.4 - 8.3 bar)
Material Inlet / Outlet (female)		Maximum Flow Rate	237 gpm (897 lpm)
PX30X- <u>A</u> XX-XXX-CXXX.....	3 - 8 NPTF - 1	flooded inlet.....	275 gpm (1,041 lpm)
PX30X- <u>B</u> XX-XXX-CXXX.....	Rp 3 (3 - 11 BSP parallel)	Maximum Particle Size	3/8" dia. (9.5 mm)
PX30X- <u>D</u> XX-XXX-CXXX.....	3" ANSI Flange (4 Holes)	Maximum Temperature Limits (diaphragm / ball / seat material)	
PX30X- <u>F</u> XX-XXX-CXXX.....	3" DIN Flange (8 Holes)	E.P.R./EPDM	-60° to 280° F (-51° to 138° C)
Air Inlet (female)	3/4 - 14 NPTF - 1	Hytrel®.....	-20° to 180° F (-29° to 82° C)
Air Exhaust (female).....	1-1/2 - 11-1/2 NPT	Nitrile.....	10° to 180° F (-12 to 82° C)
Weight		PVDF.....	10° to 200° F (-12° to 93° C)
PX30A- <u>X</u> A X -XXX-CXXX.....	129.6 lbs (58.8 kgs)	Santoprene®.....	-40° to 225° F (-40° to 107° C)
PX30A- <u>X</u> C X -XXX-CXXX.....	221.1 lbs (100.3 kgs)	PTFE.....	40° to 225° F (4° to 107° C)
PX30A-AH X -XXX-CXXX, BH X	249.8 lbs (113.3 kgs)	Viton®.....	-40° to 350° F (-40° to 177° C)
PX30A-AS X -XXX-CXXX, BS X	228.8 lbs (103.8 kgs)	Displacement / Cycle @ 100 psig ...	2.8 gal. (10.6 lit.)
PX30A-FH X -XXX-CXXX, DH X	269.6 lbs (122.3 kgs)	Noise Level @ 70 psig - 50 cpm ^① ...	83.0 dB(A) ^②
PX30A-FS X -XXX-CXXX, DS X	245.6 lbs (111.4 kgs)	① Tested with 67263 muffler assembly installed.	
[add 40.0 lbs (18.2 kgs) for Stainless steel air motor section]		② The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (LAeq) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROP S5.1 using four microphone locations.	
Air Section Service Kit	637421		
Fluid Section Service Kit (without Seats).....	637303-XX		
Fluid Section Service Kit (with Seats).....	637303-XXX		

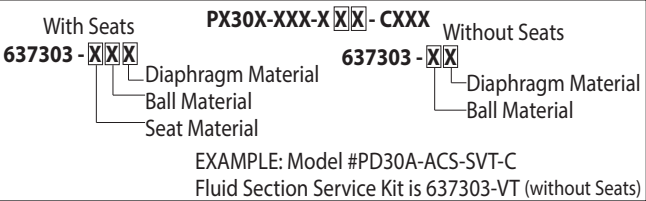


ACCESSORIES:

66109 Air line Connection Kit

67263 Continuous Muffler

94117 Int. Muffler

DIMENSIONAL DATA

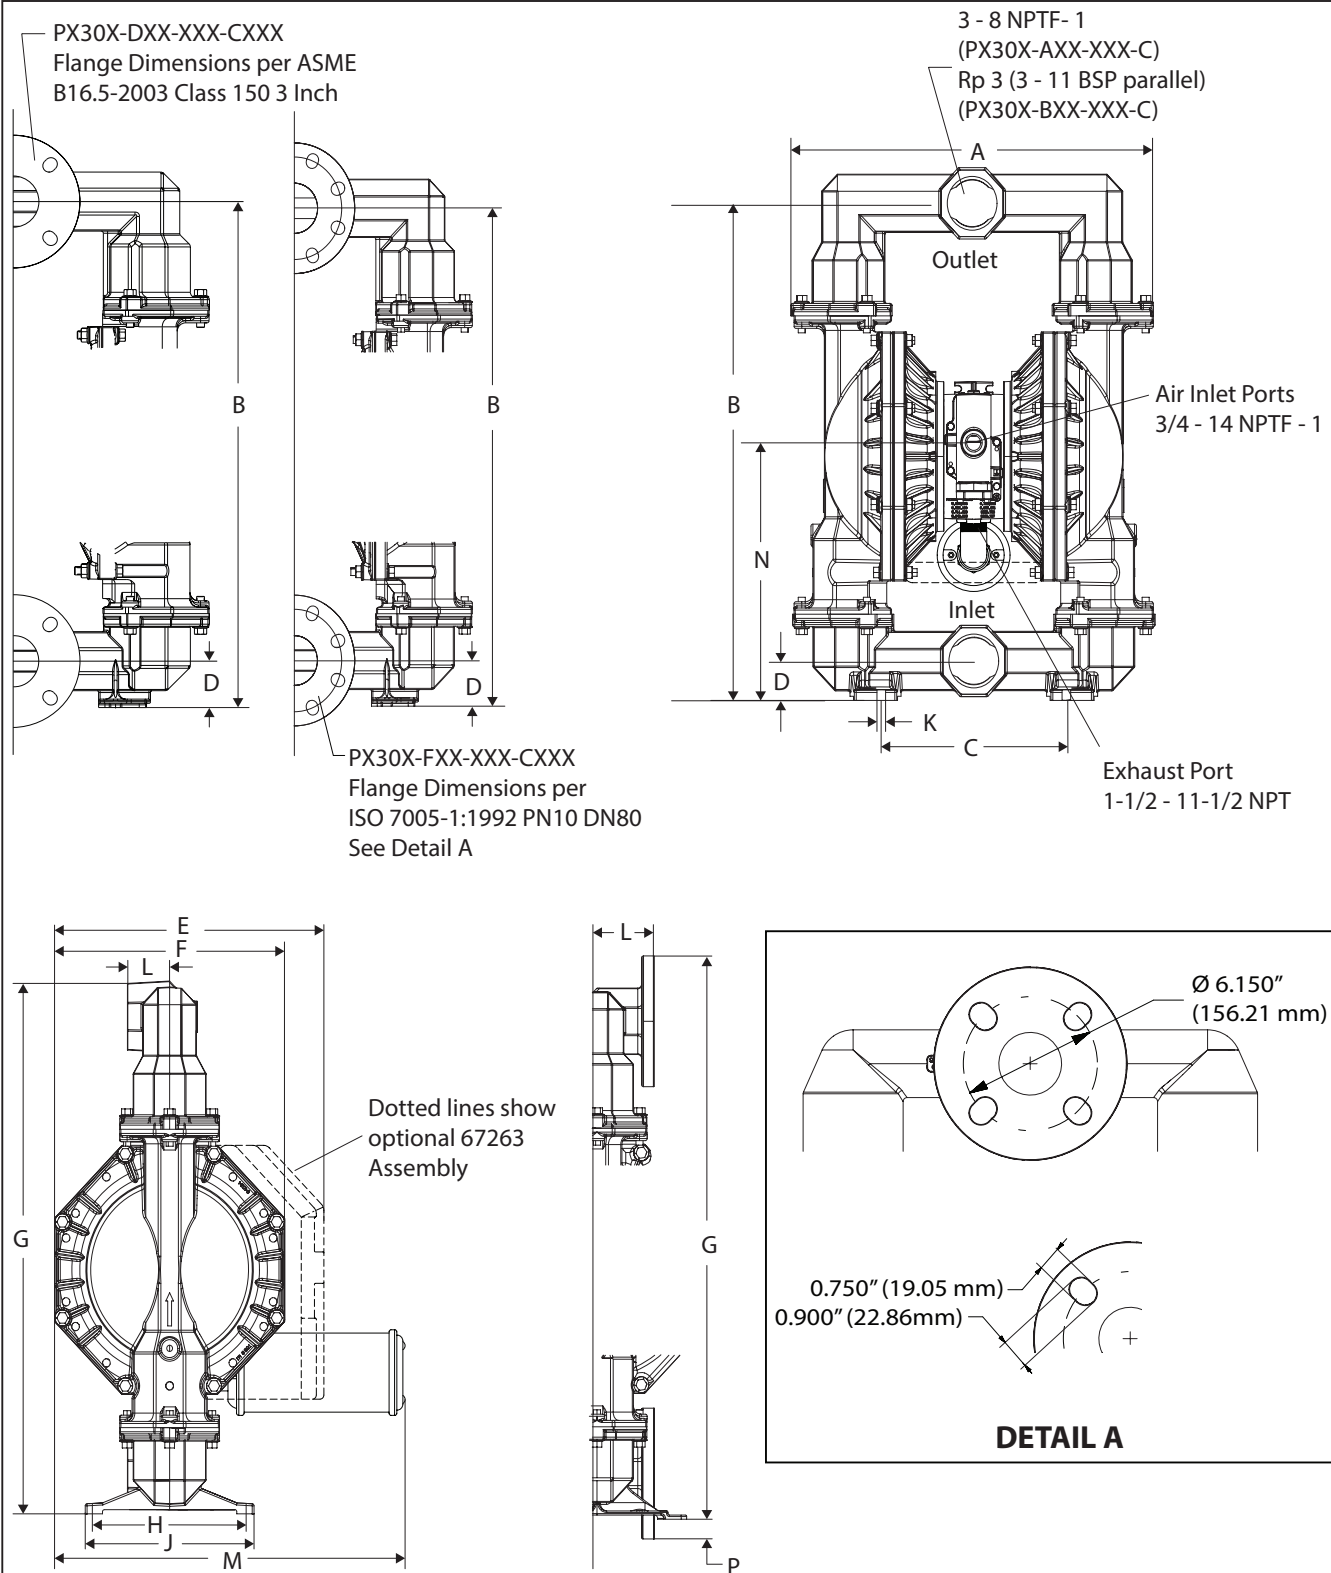

DIMENSIONS

A - see below
B - 30" (762.0 mm)
C - 12.06" (306.4 mm)
D - see below

E - 17.68" (449.2 mm)
F - 15" (381.0 mm)
G - see below
H - 10.15" (258.0 mm)

J - see below
K - 0.56" (14.3 mm)
L - see below
M - 23.09" (586.3 mm)



N - see below
P - 1.18" (30.2 mm))

	"A"	"D"	"J"	"N"	"L"	"G"
PZ30X-XAX-XXX-CXX	23.62" (600.1 mm)	2.37" (60.3 mm)	11" (279.4 mm)	15.5" (393.7 mm)	2.75" (69.9 mm)	32" (812.8 mm)
PZ30X-XCX-XXX-CXX	23.62" (600.1 mm)	2.43" (61.9 mm)	11.68" (296.9 mm)	15.5" (393.7 mm)	2.75" (69.9 mm)	32" (812.8 mm)
PZ30X-XHX-XXX-CXX	23.12" (587.4 mm)	2.75" (69.9 mm)	11.68" (296.9 mm)	16" (406.4 mm)	2.75" (69.9 mm)	32" (812.8 mm)
PZ30X-XSX-XXX-CXX	23.12" (587.4 mm)	2.75" (69.9 mm)	11.68" (296.9 mm)	16" (406.4 mm)	2.75" (69.9 mm)	32" (812.8 mm)
PZ30X-DXX-XXX-CXX	23.12" (587.4 mm)	2.75" (69.9 mm)	11.68" (296.9 mm)	16" (406.4 mm)	3.75" (95.25 mm)	33.93" (862.0 mm)
PZ30X-FXX-XXX-CXX	23.12" (587.4 mm)	2.75" (69.9 mm)	11.68" (296.9 mm)	16" (406.4 mm)	3.75" (95.25 mm)	33.93" (862.0 mm)

NOTE: Dimensions are shown in inches and (mm), supplied for reference only and are typically rounded up to the nearest 1/16 inch.

PERFORMANCE CURVES

**PD30A-XXX-XXX-CXXX , PD30S-XXX-XXX-CXXX, PZ30A-XXX-XXX-CXX AND
PZ30S-XXX-XXX-CXX 3" METALLIC DIAPHRAGM PUMP**

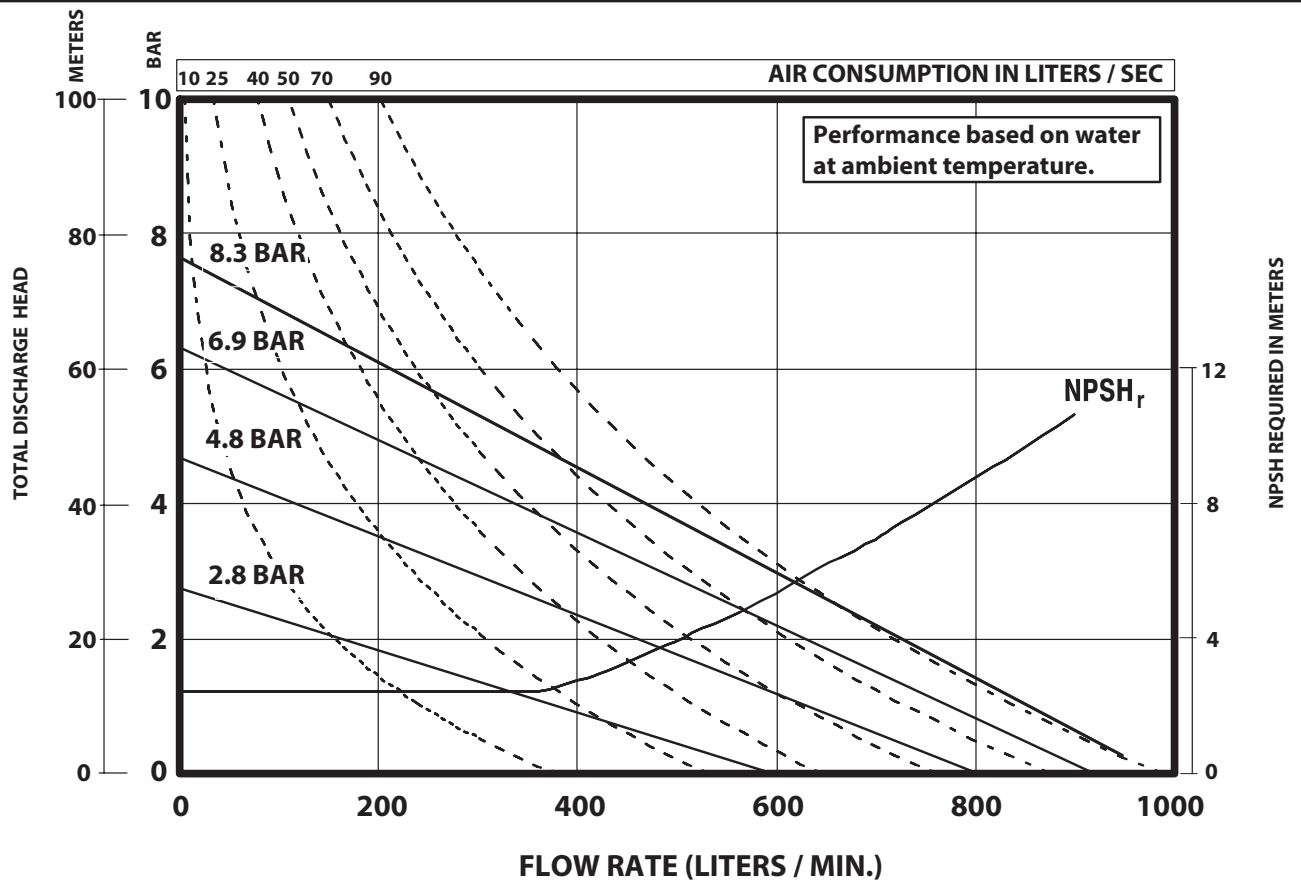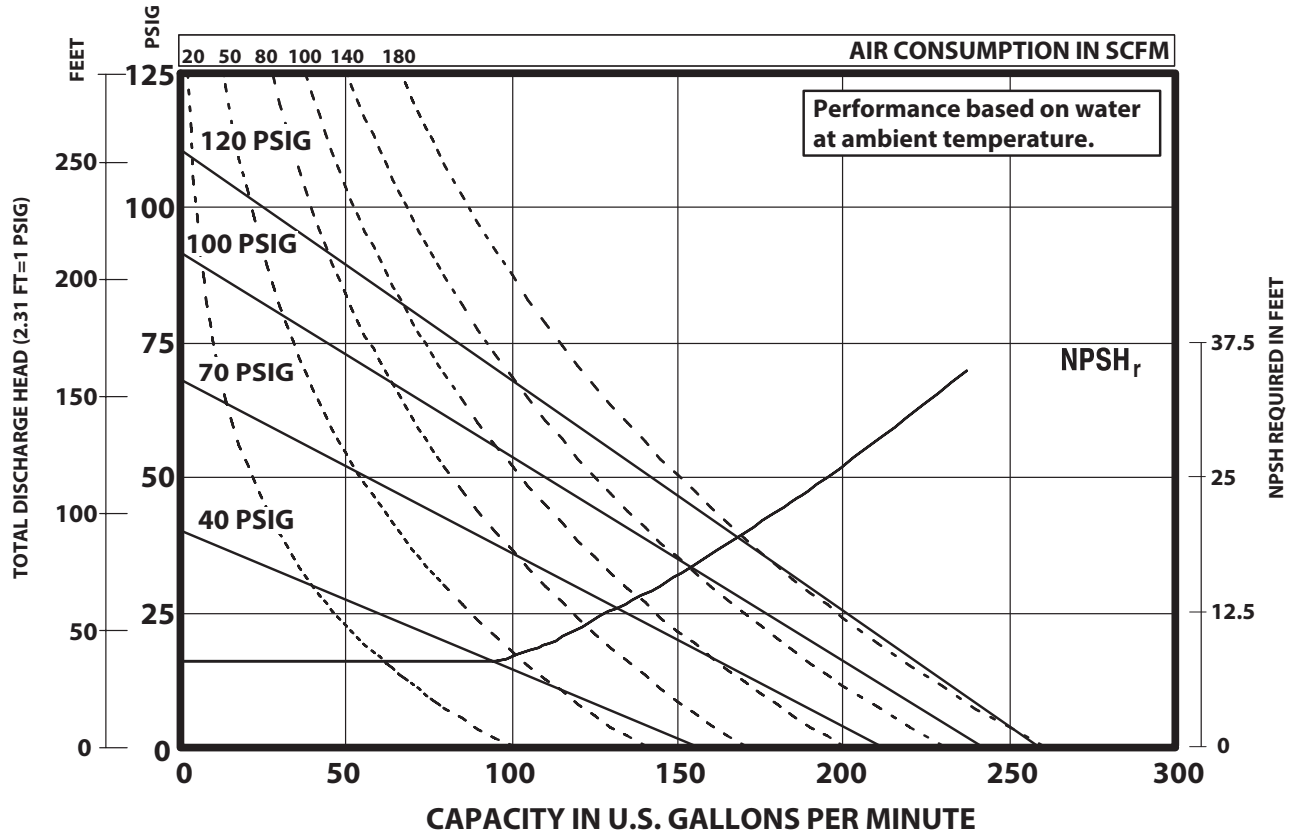

PERFORMANCE CURVES

PE30X-XXX-XXX-XXEX AND PE30X-XXX-XXX-XXFX 3" METALLIC DIAPHRAGM PUMP

