



SMART Digital S DDA-C


DDA \leq 30 l/h (8 gph)



DDA-C I&O



net.grundfos.com/qr/i/92881338



Min. / Max.
-10 °C / +45 °C
14 °F / 113 °F



Min. / Max.
0 °C / +45 °C
32 °F / 113 °F




≤ 60 dB(A)



IP65
(Enclosure type 4X)






100-240 V, 50/60 Hz


DDA-C I&O
net.grundfos.com/qr/i/92881338

SDS

§

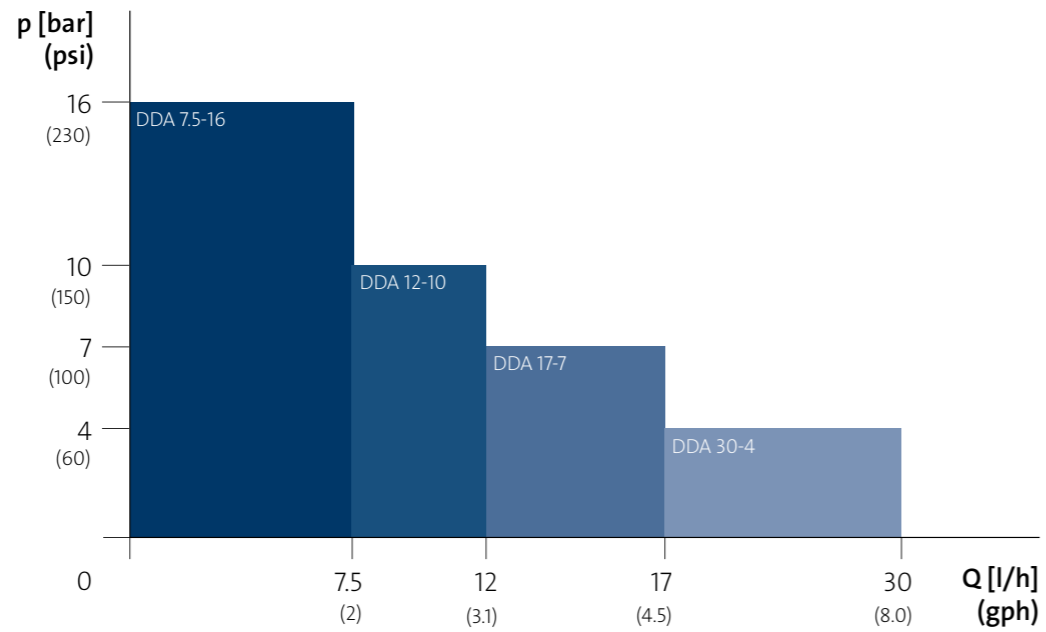

$p_2 - p_1 \geq 1 \text{ bar (15 psi)}$






100-240 V,
50/60 Hz





Max. 1.5 m / 59"




Min. 100 mm / 4"



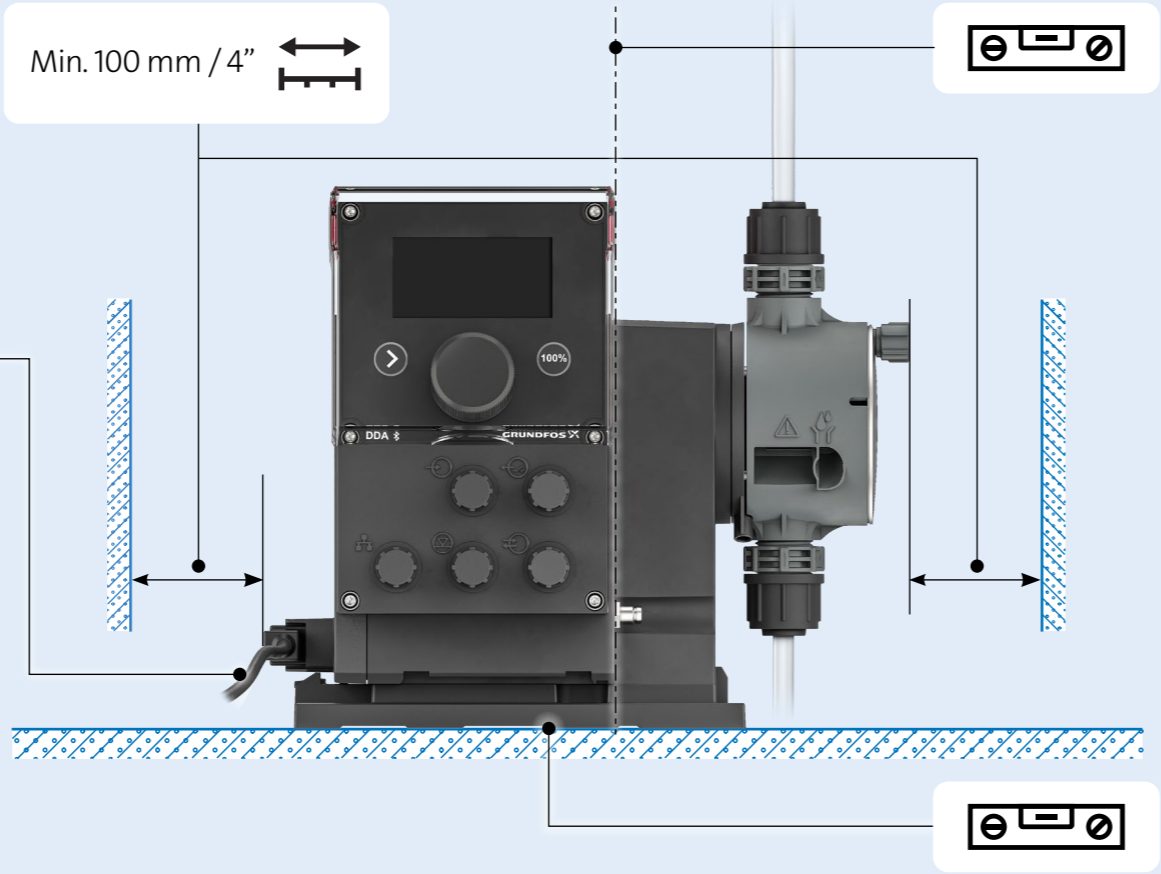


Max.
4 kg / 8.8 lb

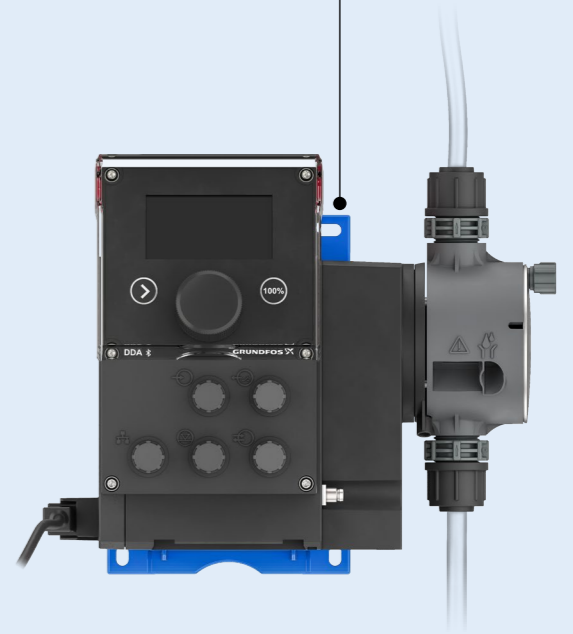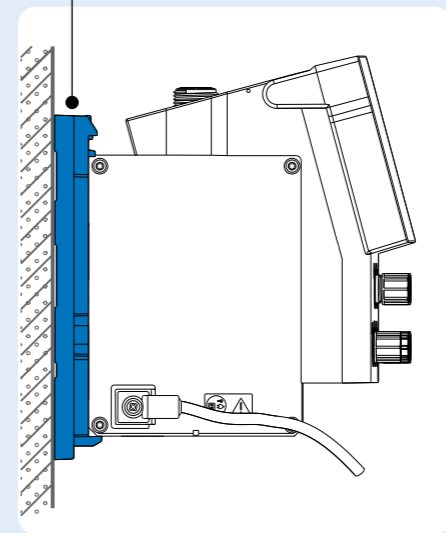

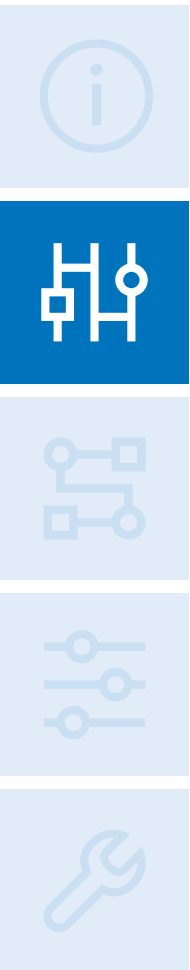


1a

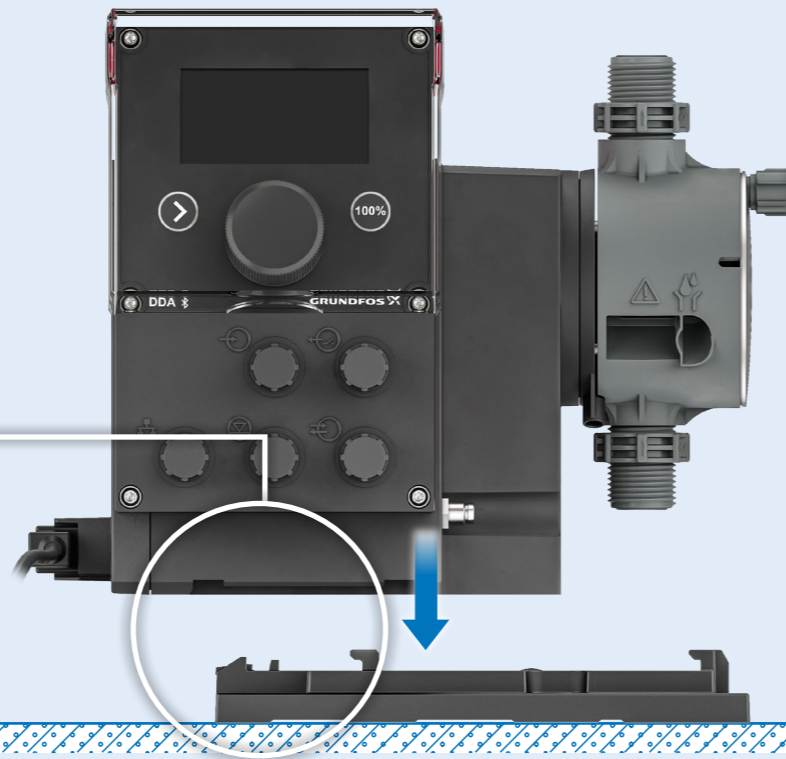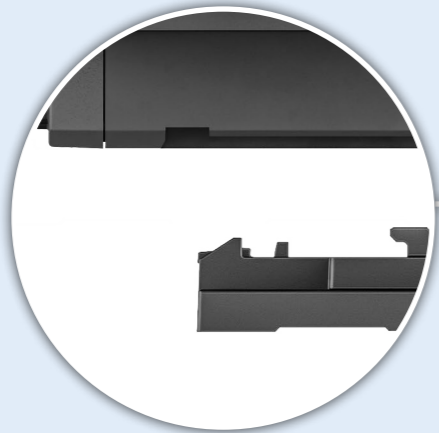
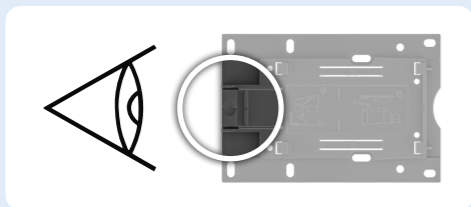


2a




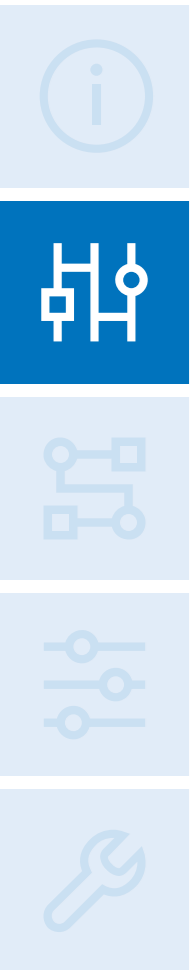


1b

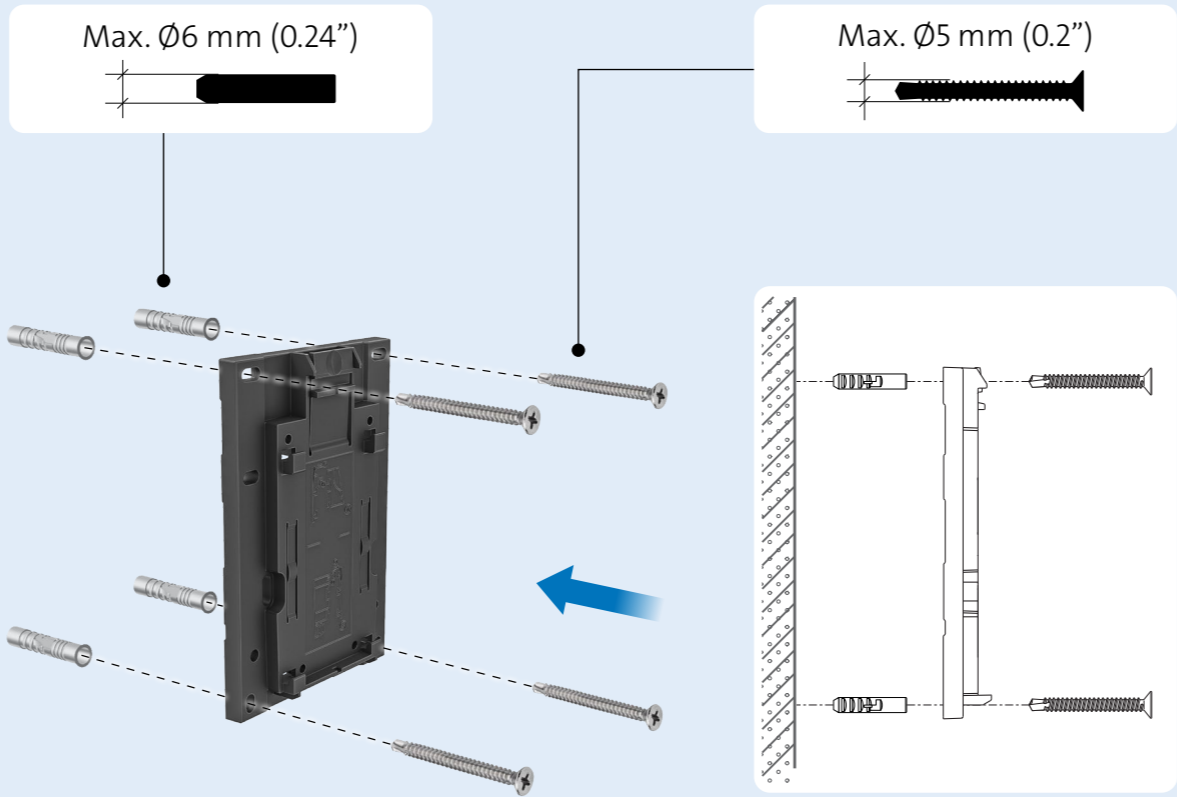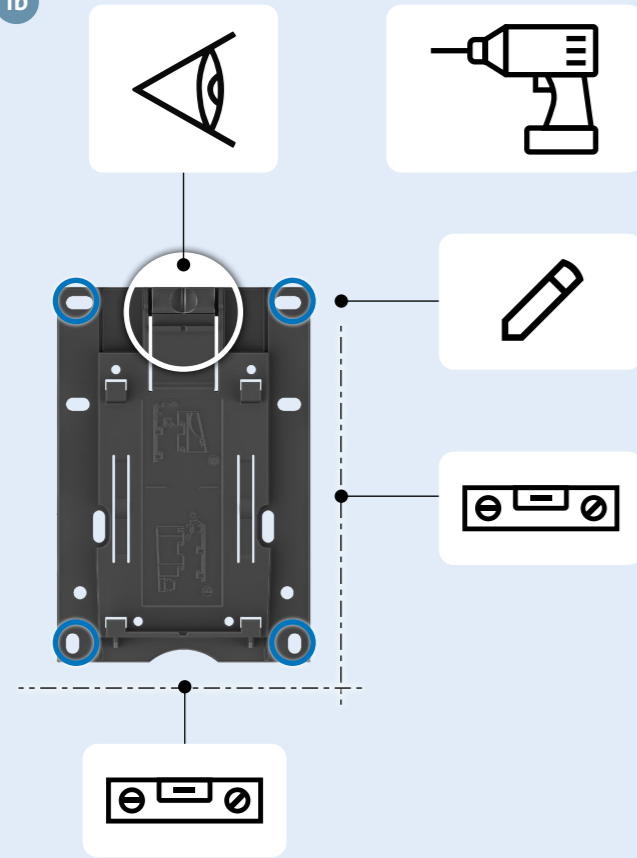

2b

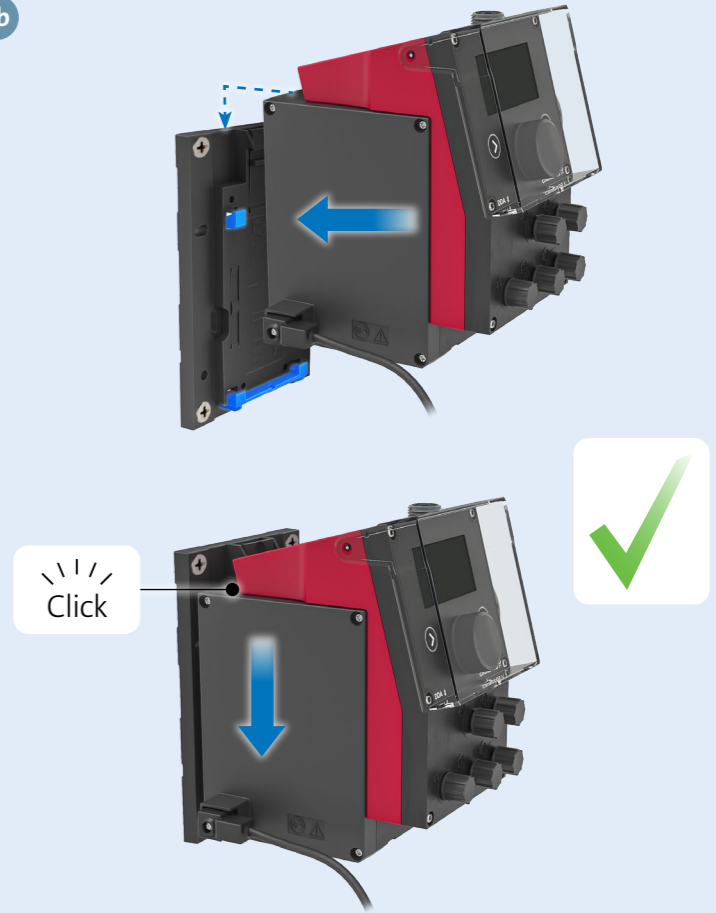

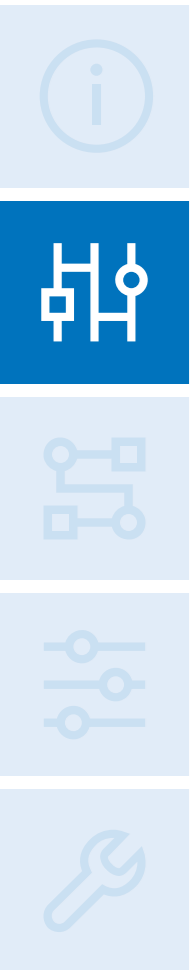


3

TORX PLUS (15 IP)



4

Max. 5 cm (1.97")

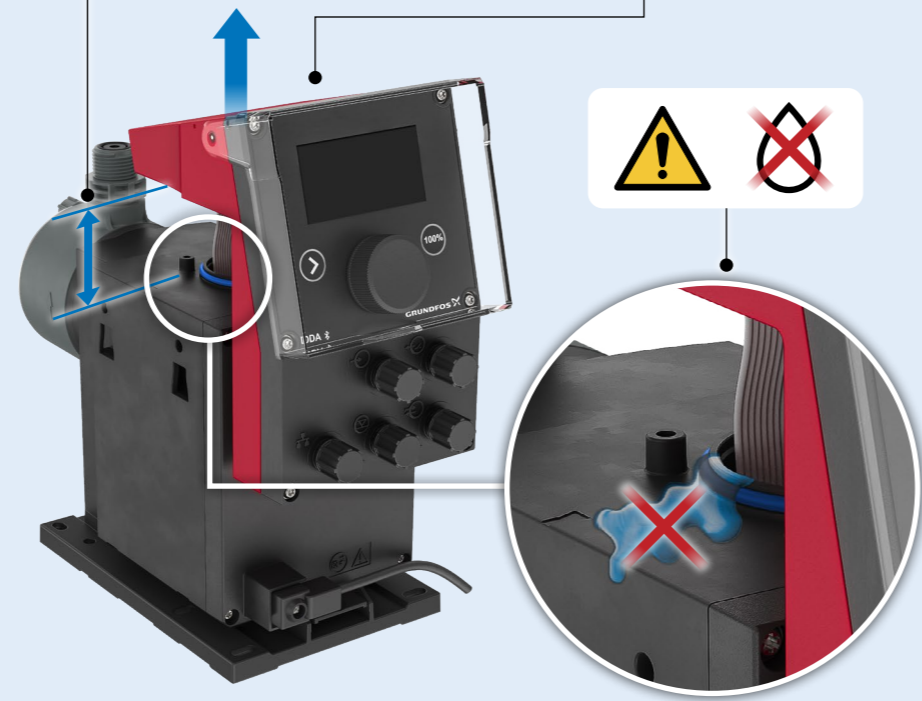


5



6

TORX PLUS (15 IP)






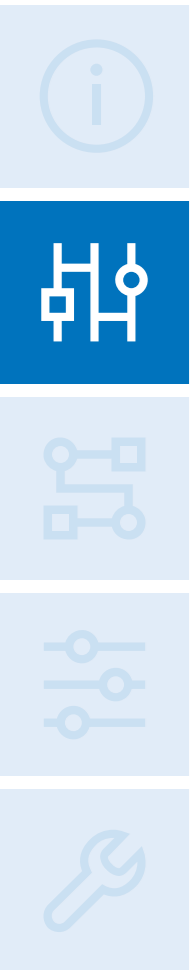






7



8

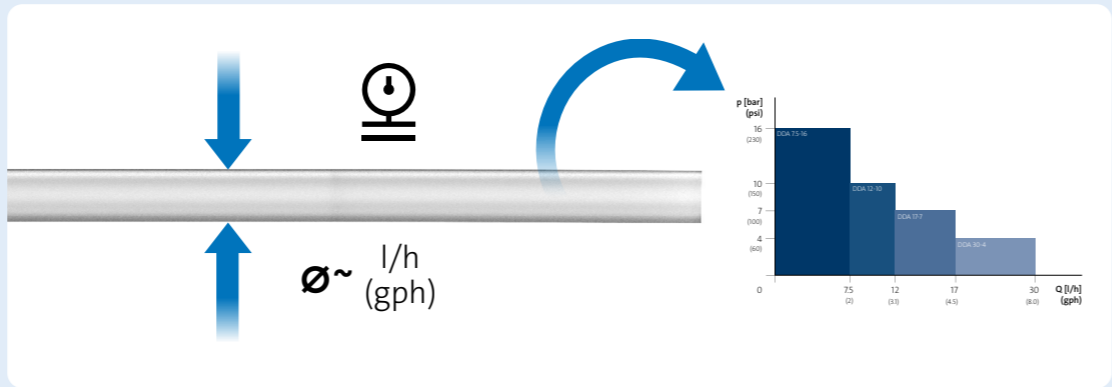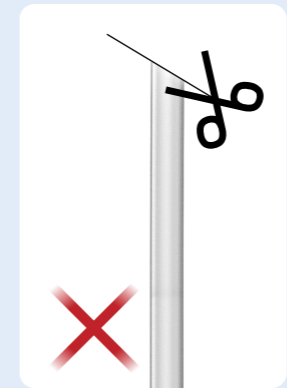
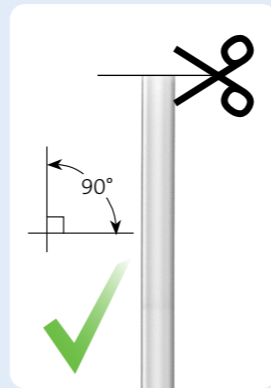


9

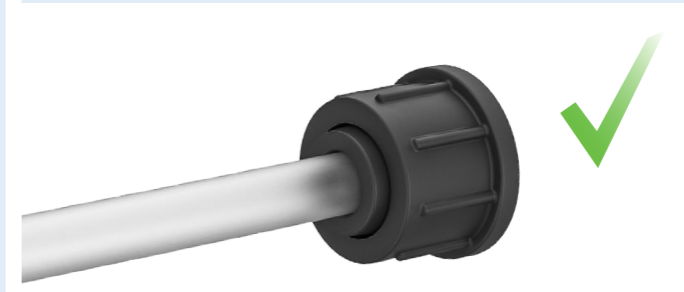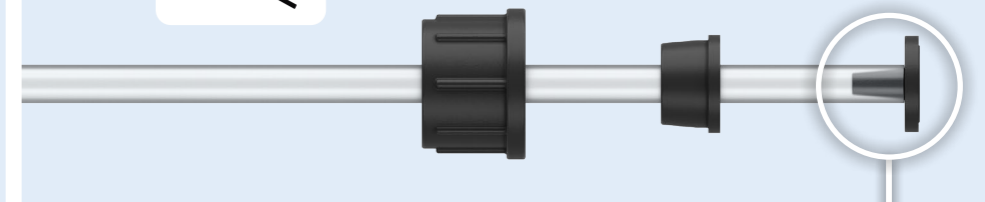
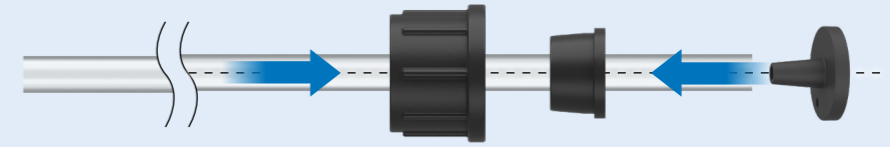




10

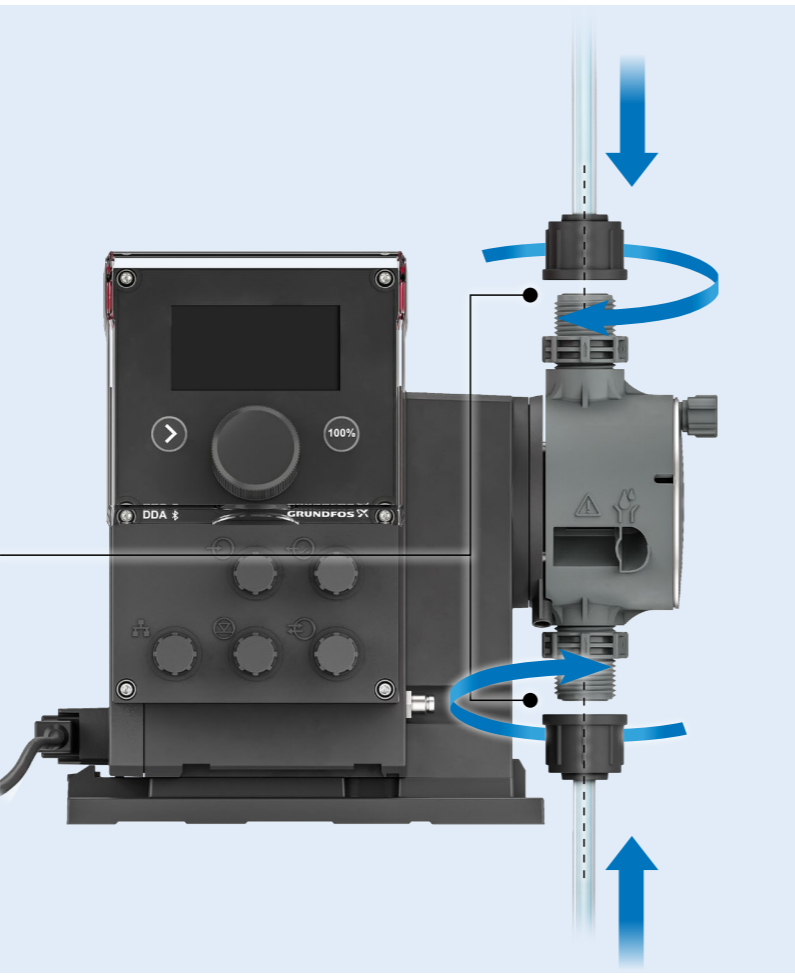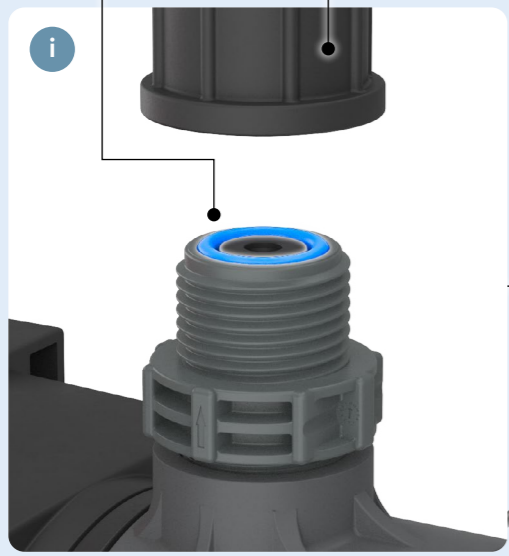







11

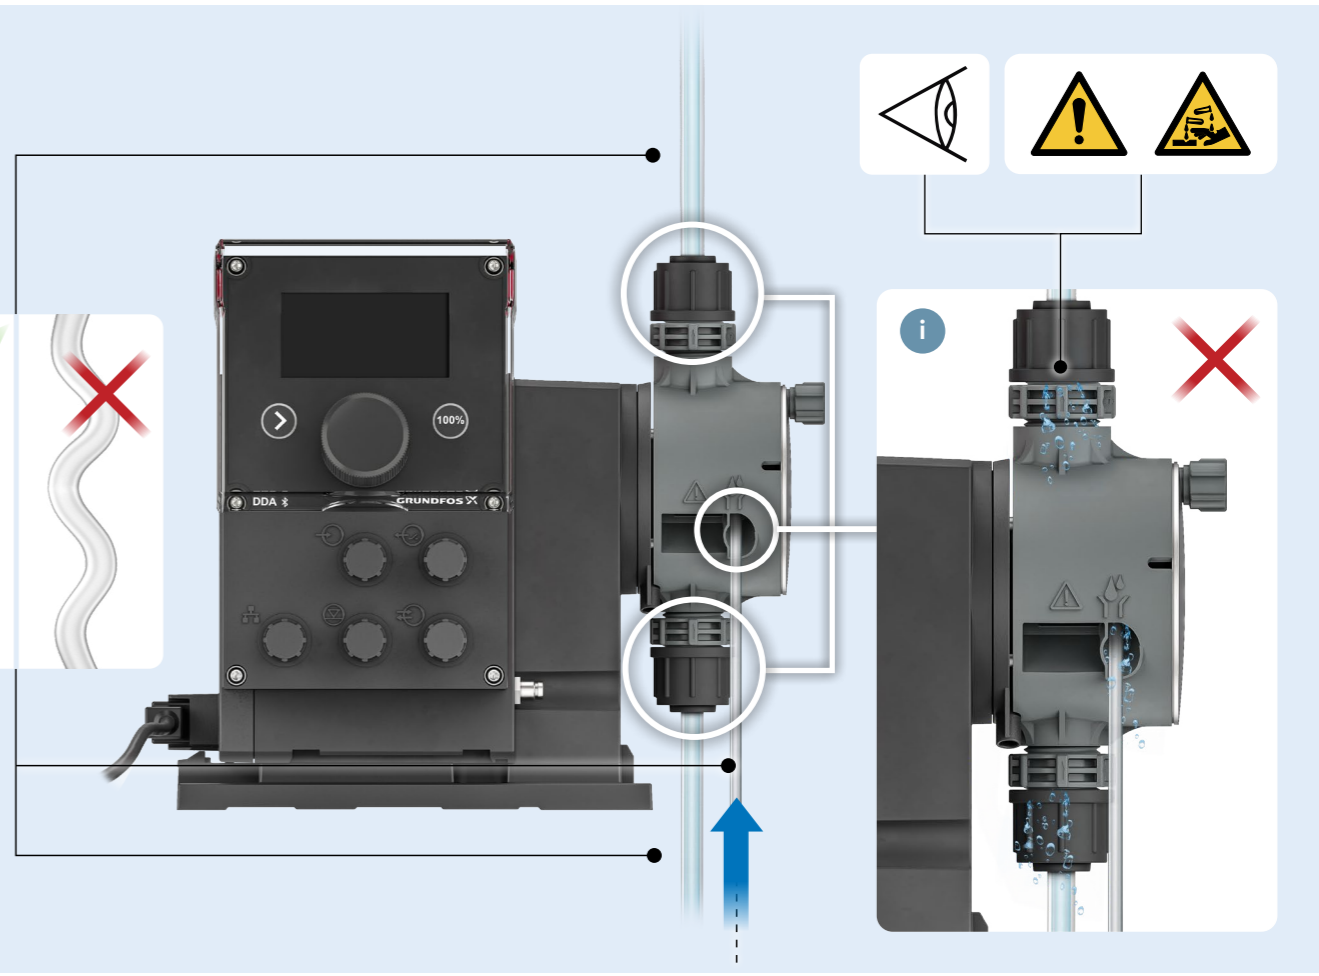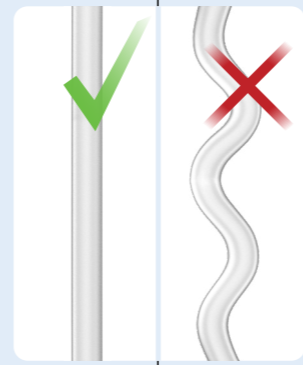




12





100-240 V,
50/60 Hz

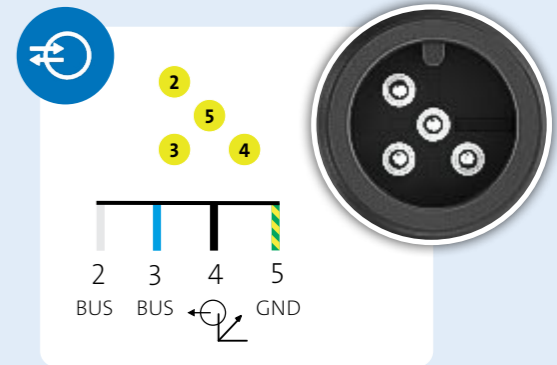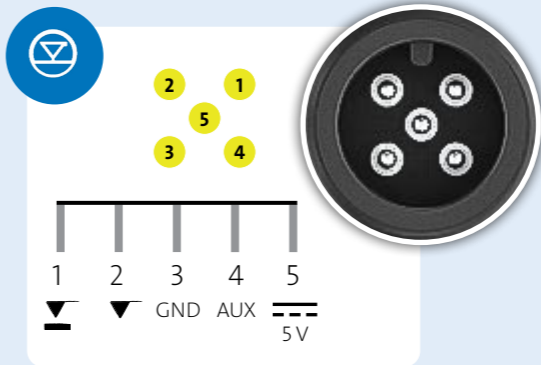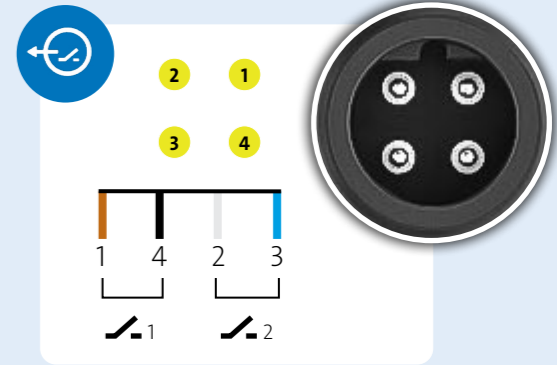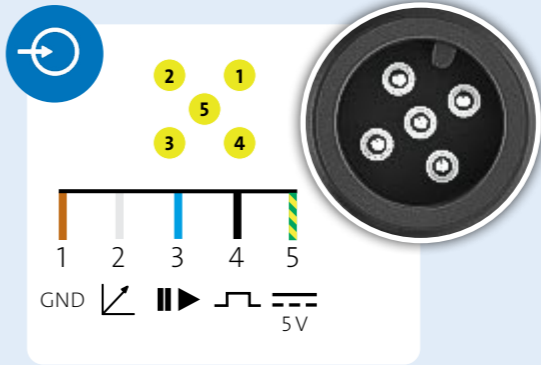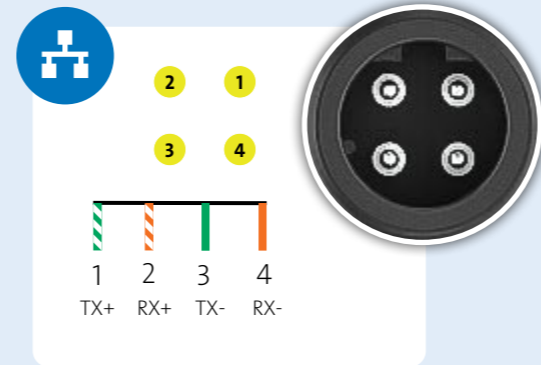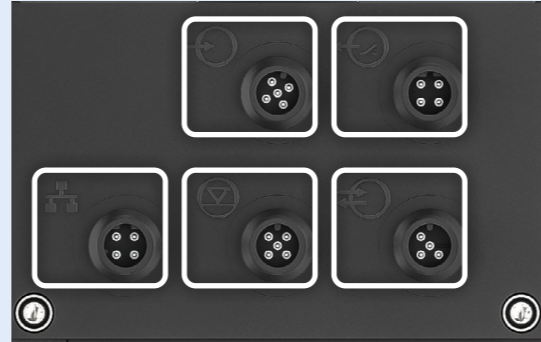



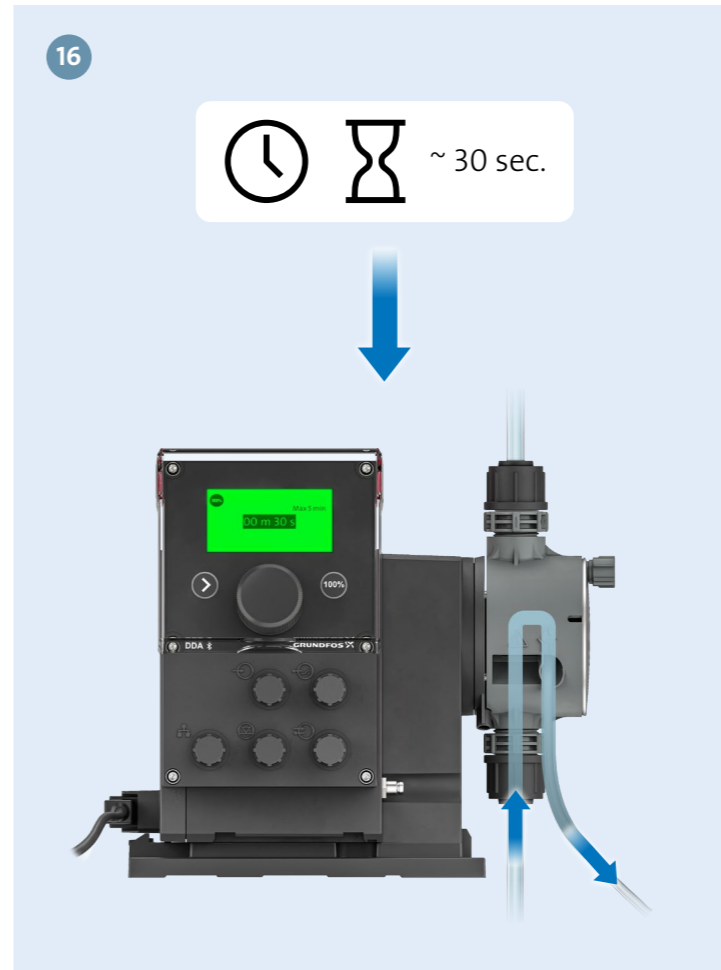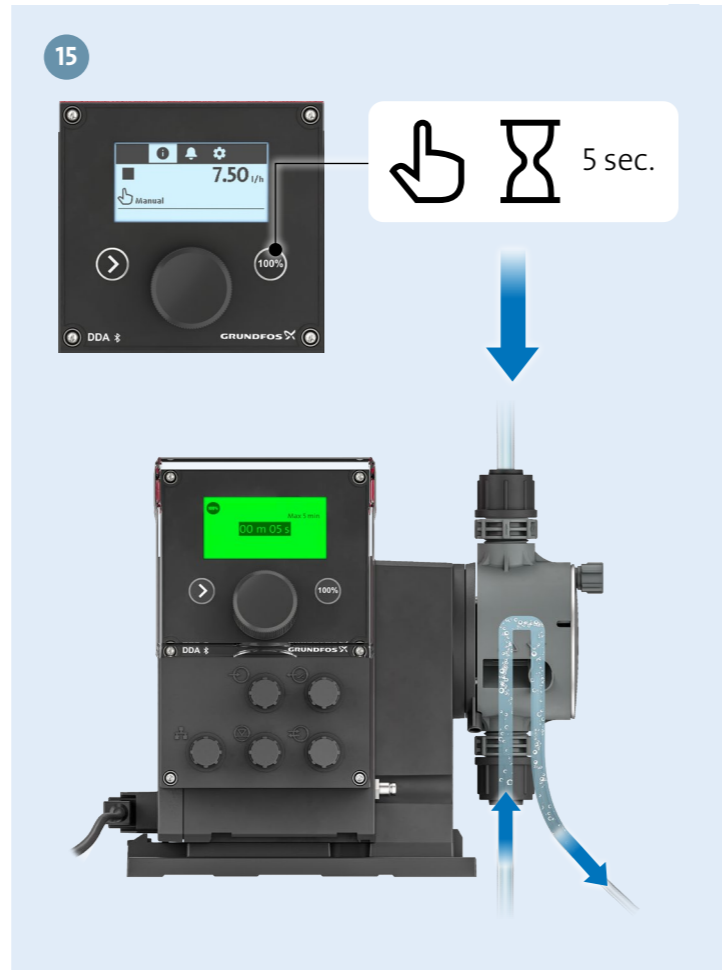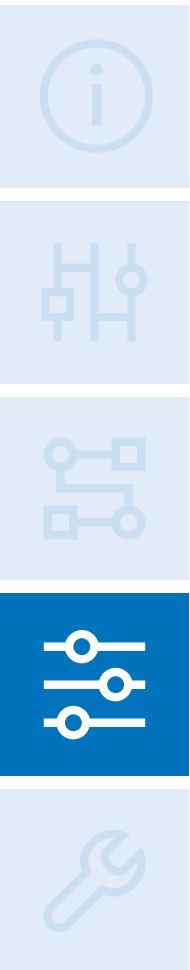

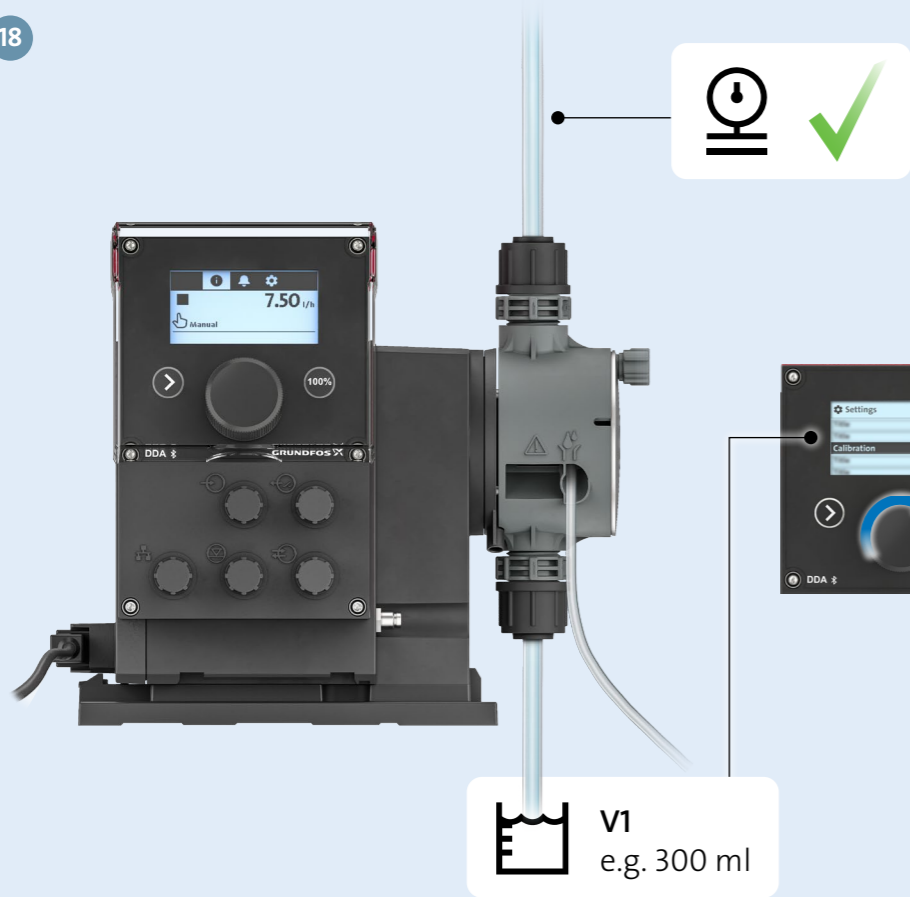


V1 - V2
e.g. 300 - 190 = 110 ml






19

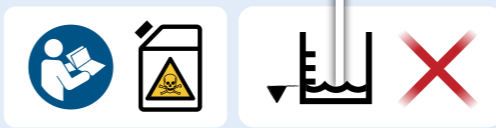


Available on the **App Store**




GET IT ON **Google play**



Android is a trademark of Google Inc

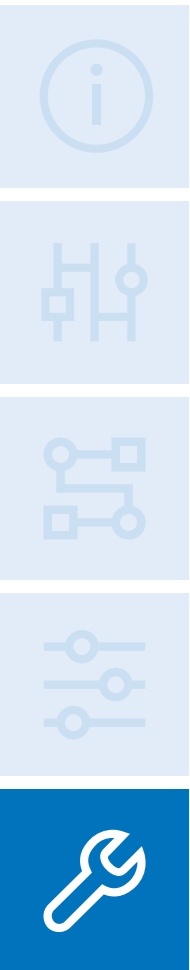

GO




1


 PN: 97XXXXXX 









2




 = 0 bar (0 psi)

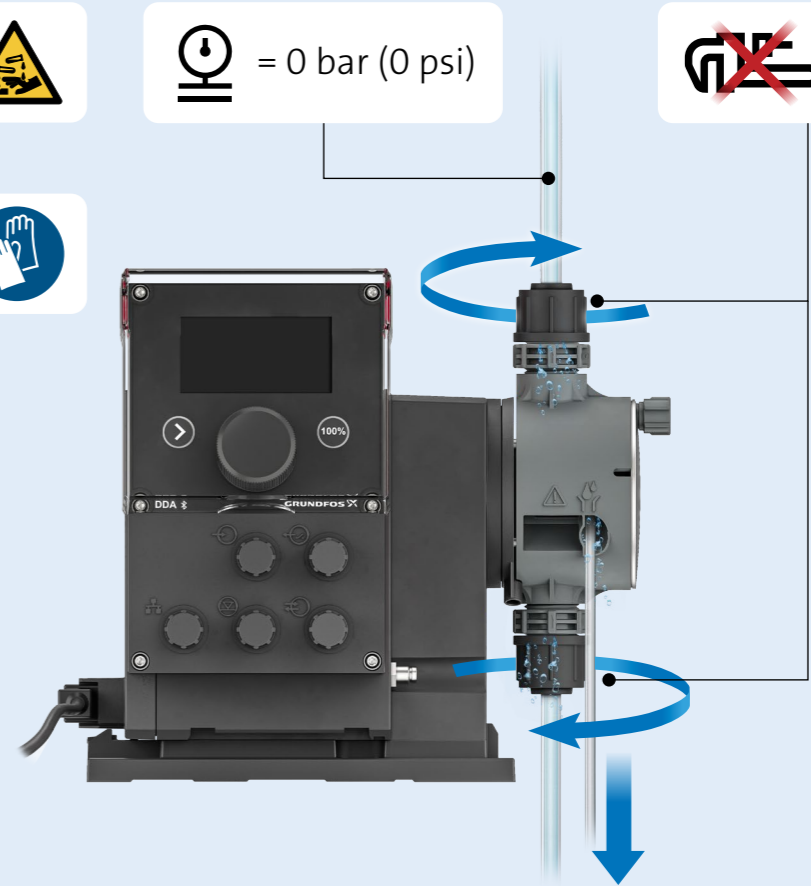

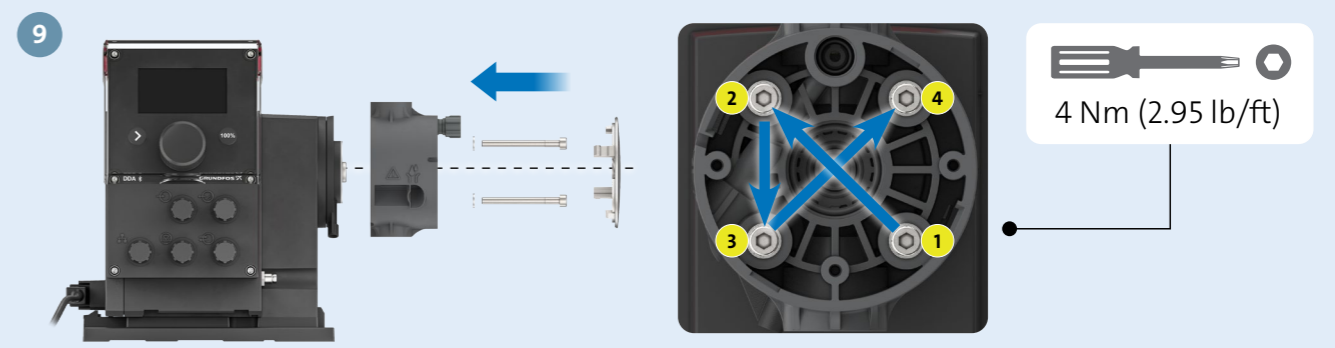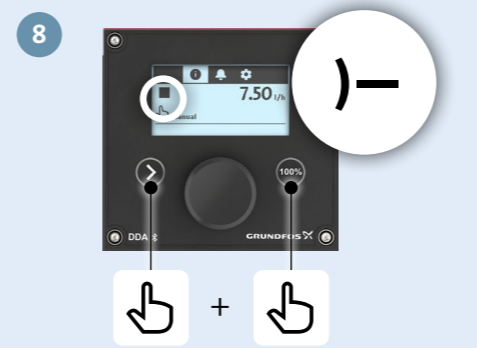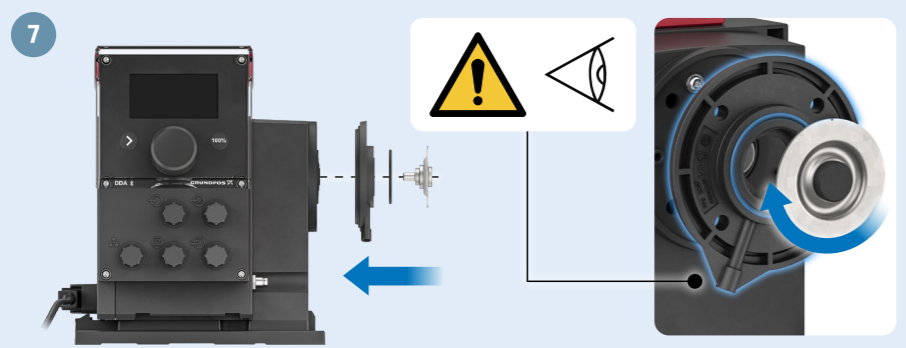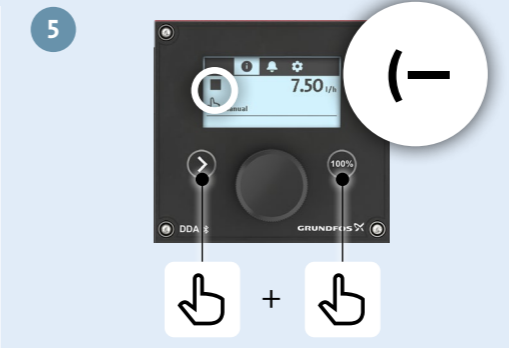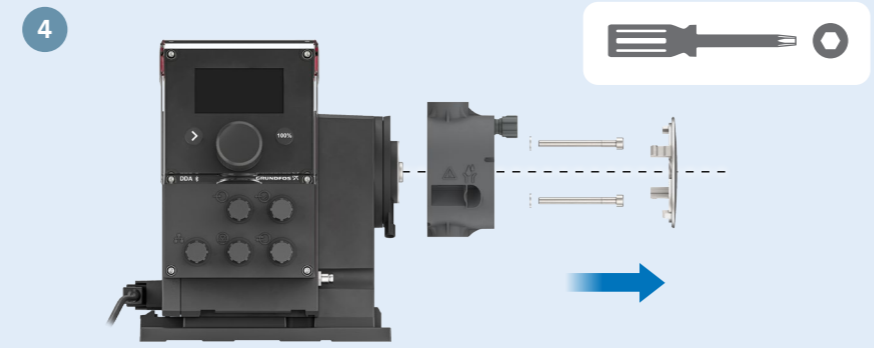


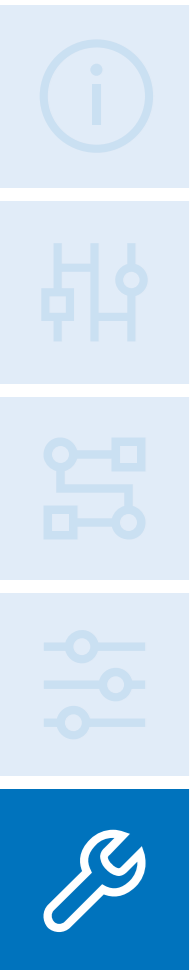


10

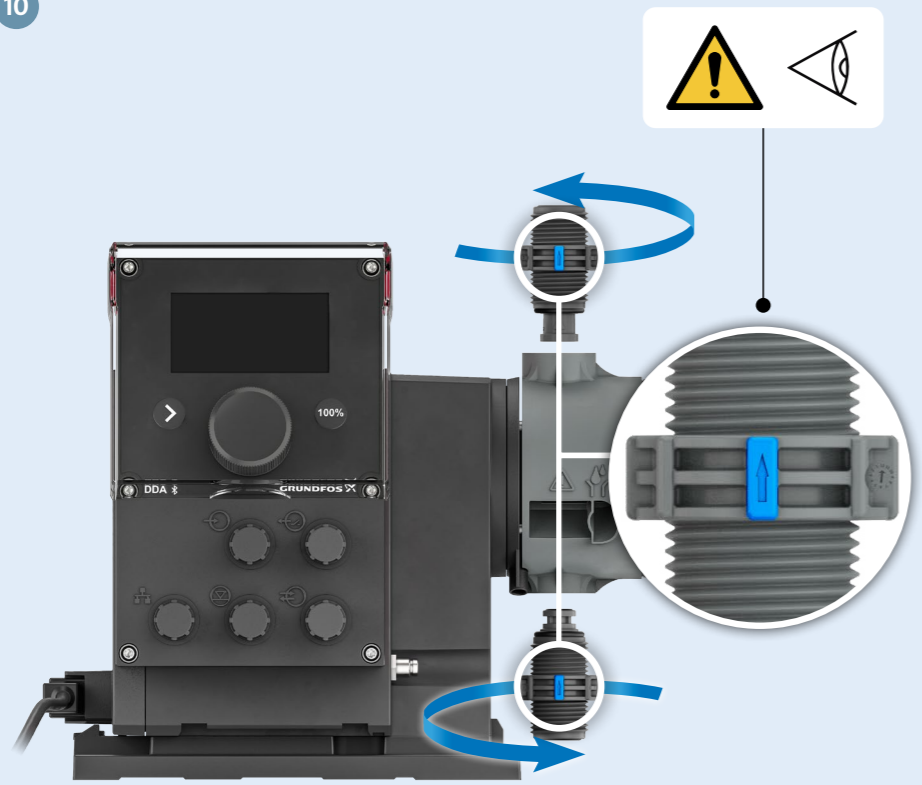

11

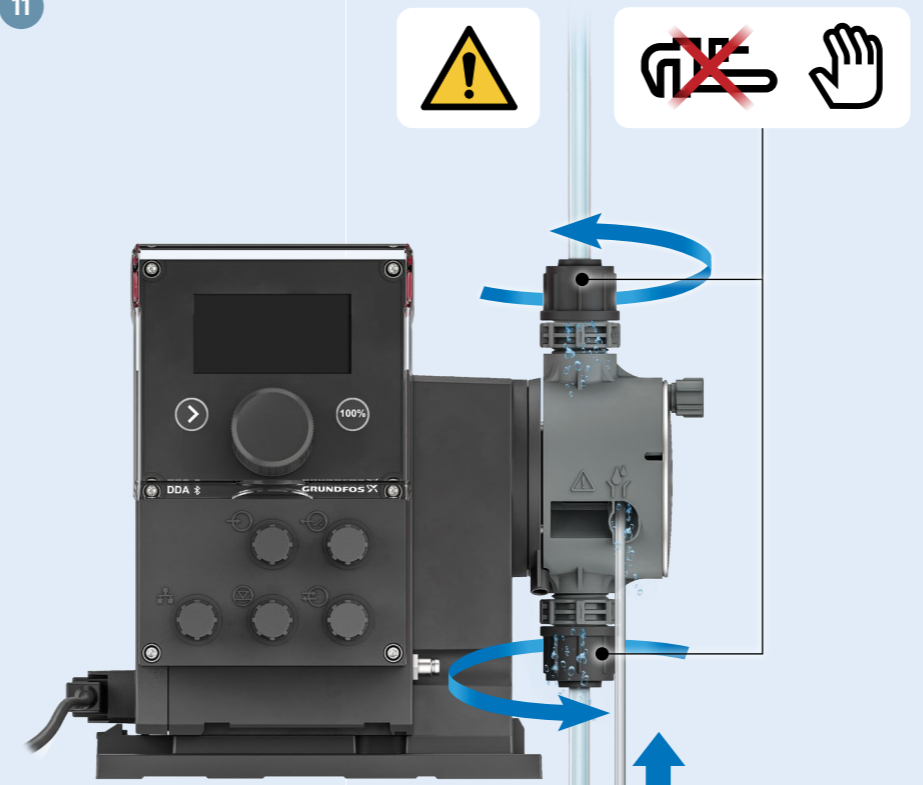

12

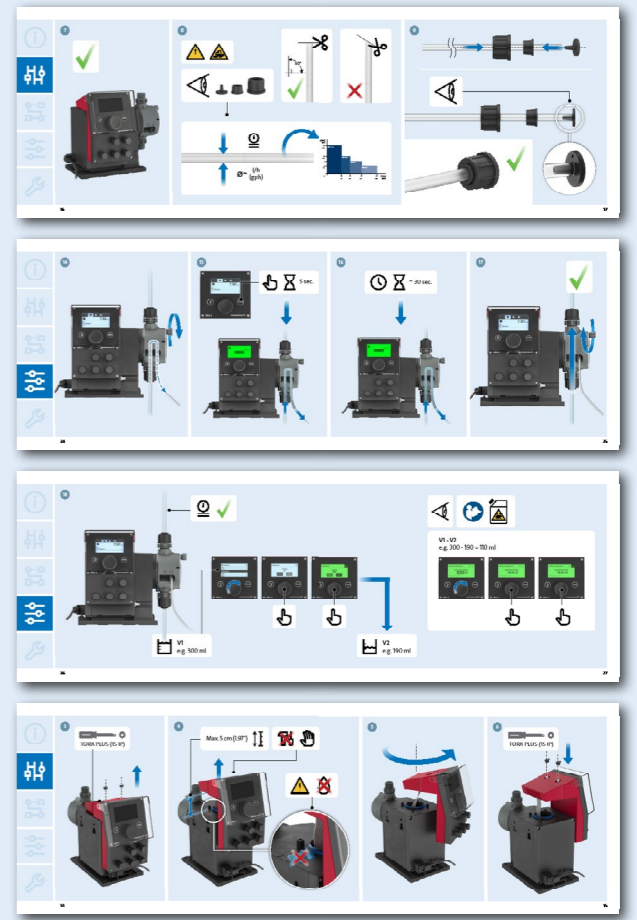



92881337 04.2025

ECM: 1415915

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS