

FLEX-PRO A2

Feed Rates to 17.2 GPH (65.1 LPH)
Pressures to 125 PSI
4-20mA, Pulse Input and Manual Speed Control
Optional Modbus, Profibus, Industrial Ethernet
100:1 Turndown ratio
Tube Failure Detection System
Variable Speed DC Motor
NEMA 4X (IP 66) Washdown Duty
2 Year Warranty



NEMA 4X **CE**



Patents: 4,496,295 7,001,153 and other patents pending

Applications:

- Chemical Metering
- Wastewater Treatment
- Chlorination
- Chloramination
- Fluoridation
- Polymer Injection
- Pulp & Paper Slurries
- Printing Inks
- Oil Based Fluids
- Gaseous Fluids
- Shear Sensitive Fluids
- Caustics
- Chemical Slurries
- Food and Beverage

Features:

- Peristaltic pump design does not have valves that can clog requiring maintenance.
- Self priming - even against maximum line pressure. By-pass valves are not required. Cannot vapor lock or lose prime.
- Output rates to: 17.2 GPH (65.1 LPH) and pressures to 125 PSI (8.6 Bar).
- Variable speed DC motor.
- Specially engineered tubing for long life and high pressures. Meets FDA 21 CFR requirements for food contact applications.
- Patented Tube Failure Detection (TFD) system. Senses tube failure by detecting chemical in the pump head. No false triggering.
- 100:1 turndown ratio.
- SCADA Inputs include: 4-20mA and pulse inputs for remote external speed control and either powered 6-24 VDC or non-powered dry contact closure for remote start/stop.
- Operator friendly digital touch pad.
- Backlit LCD displays motor speed, input signal values, service and alarm status.
- Outputs include: one 250V/3A relay to monitor TFD (Tube Failure System) and FVS (Flow Verification System). A 4-20mA analog output signal scaled to the motor speed is optional.
- Two CNC precision machined squeeze rollers and two alignment rollers for optimum squeeze, unparalleled accuracy, and tube life.
- Heavy duty rotor - single piece plastic rotor means no flexing and increased accuracy with no metal springs or hinges to corrode.
- Inject at maximum pressure in either direction (clockwise and counter clockwise).
- Compatible with Blue-White's output Flow Verification Sensor (FVS) system. Sensor is sold separately.

Engineering Specifications:

Maximum working pressure (excluding pump tubes):

125 psig (8.6 bar)

Note: see individual pump tube assembly maximum pressure ratings.

Maximum Fluid temperature (excluding pump tubes):

3/8" OD x 1/4" ID tubing connections: 130° F (54° C)

M/NPT connections: 185° F (85° C)

Note: see individual pump tube assembly maximum temperature ratings.

Maximum fluid viscosity:

12,000 Centipoise

Maximum suction lift:

30 ft. of water at sea level (14.7 atm psi)

Ambient Operating Temperature

14°F to 115°F (-10°C to 46°C)

Ambient Storage Temperature

-40°F to 158°F (-40°C to 70°C)

Operating Voltage:

115VAC/60Hz, 1ph (1.5 Amp Maximum)

230VAC/60Hz, 1ph (0.7 Amp Maximum)

220VAC/50Hz, 1ph (1.0 Amp Maximum)

240VAC/50Hz, 1ph (1.0 Amp Maximum)

Power Cord Options:

115V60Hz = NEMA 5/15 (USA)

230V60Hz = NEMA 6/15 (USA)

220V50Hz = CEE 7/II (EU)

240V50Hz = AS 3112 (Australia/New Zealand)

Motor:

Brushed DC, 1/8 H.P.

Duty cycle:

Continuous

Motor speed adjustment range 100:1:

1.0% - 100% motor speed (1.3 to 130 RPM)

Motor speed adjustment resolution:

0.1% increments

Display

Backlit LCD, UV resistant.

Keypad

Eight button positive action tactile switch keypad.

Enclosure:

NEMA 4X (IP66), Polyester powder coated aluminum.

Maximum Overall Dimensions:

7-1/2" W x 10-1/4" H x 14" D (19 W x 26 H x 35.6 D cm)

Product weight:

28.4lb. (12.9 Kg)

Approximate shipping wt:

35 lb. (15.9 Kg)

Materials of Construction:

Wetted components:**Pump Tube Assembly (Model Specific - 2 provided):**

Tubing: Norprene® or Norprene Chemical® or Tygothane®

Adapter fittings: .PVDF

Injection / Back-flow Check valve:

Body & insert: PVDF

Check Ball: Ceramic

Spring: Hastelloy C-276

Ball Seat O-ring: FKM (optional EPDM)

Static Seal O-ring: FKM (optional EPDM)

Duckbill anti-scale valve: Santoprene®

Ancillary Items provided**With "S" tubing type connections only:**

Suction Tubing: 3/8" OD x 1/4" ID x 10' Clear PVC

Discharge Tubing: 3/8" OD x 1/4" ID x 10' Polyethylene (LLDPE)

Suction Strainer: Polypropylene

With "B" tubing and "M" M/NPT connections only:**Suction Strainer:**

Body: PVDF

Check Ball: Ceramic

Ball Seat O-ring: FKM (optional EPDM)

For "C" Tri-clamp and "Q" Quick Disconnect connections only:

(Available for Flex-A-Prene® only)

Suction Strainer: Polypropylene

Non-Wetted components:**Enclosure:**

413 Aluminum (Polyester powder coated)

Pump Head:

Valox® (PBT) thermoplastic

Pump Head Cover:

Polycarbonate for added strength and chemical resistance.

Permanently lubricated sealed motor shaft support ball bearing.

Cover Screws:

Stainless Steel

Roller Assembly:

Rotor: Valox® (PBT)

Rollers: Nylon

Roller Bearings: SS Ball Bearings

Motor Shaft:

Chrome plated steel

TFD System Sensor pins:

Hastelloy C-276

Power Cord:

3 conductor, SJTW-A Water-resistant

Tube Installation Tool:

GF Nylon

Mounting Brackets and Hardware:

316 Stainless Steel

Output Specifications:

| Feed Rate | | | Max Speed | Max Pressure | Max Temperature | A2 Model Numbers | | |
|--|-------------|--------------|-----------|--------------|-----------------|------------------|------------|------------|
| Norprene® A2 Tube Pumps | | | | | | | | |
| Meets FDA criteria for food Excellent chemical resistance CIP SIP | | | | | | | | |
| GPH | LPH | ML/Min | RPM | PSI (bar) | F (C) | 115V AC | 230V AC | 220V AC |
| .02 - 1.7 | .07 - 6.5 | 1 - 108 | 130 | 125 (8.6) | 185 (85) | A2V24-*ND | A2V25-*ND | A2V26-*ND |
| Flex-A-Prene® A2 Tube Pumps | | | | | | | | |
| Meets FDA criteria for food Excellent chemical resistance CIP SIP | | | | | | | | |
| GPH | LPH | ML/Min | RPM | PSI (bar) | F (C) | 115V AC | 230V AC | 220V AC |
| .045 - 4.5 | .170 - 16.9 | 2.8 - 280 | 130 | 110 (7.6) | 185 (85) | A2V24-*NEE | A2V25-*NEE | A2V26-*NEE |
| .172 - 17.2 | .651 - 65.1 | 10.85 - 1085 | 130 | 110 (7.6) | 185 (85) | A2V24-*NGG | A2V25-*NGG | A2V26-*NGG |
| Norprene® Chemical A2 Tube Pumps | | | | | | | | |
| Meets FDA criteria for food Superb chemical resistance | | | | | | | | |
| GPH | LPH | ML/Min | RPM | PSI (bar) | F (C) | 115V AC | 230V AC | 220V AC |
| .15 - 14.9 | .56 - 56.2 | 9 - 937 | 130 | 50 (3.4) | 130 (54) | A2V24-*TH | A2V25-*TH | A2V26-*TH |
| Tygothane® A2 Tube Pumps | | | | | | | | |
| Meets FDA criteria for food Resistant to oils, greases and fuels | | | | | | | | |
| GPH | LPH | ML/Min | RPM | PSI (bar) | F (C) | 115V AC | 230V AC | 220V AC |
| .04 - 4.0 | .15 - 15.2 | 3 - 253 | 130 | 65 (4.5) | 130 (54) | A2V24-*GE | A2V25-*GE | A2V26-*GE |
| .09 - 9.3 | .35 - 35.2 | 6 - 587 | 130 | 65 (4.5) | 130 (54) | A2V24-*GG | A2V25-*GG | A2V26-*GG |
| <p>* Inlet/outlet connection type S = 3/8" OD x 1/4" ID tubing compressions type connections M = 1/2" Male NPT B = 1/2" Hose barb, Natural PVDF (Kynar), (Flex-A-Prene® model only) C = 1/2" - 3/4" tri-clamp connections (Flex-A-Prene® model only) Q = Quick Disconnect (Flex-A-Prene® model only)</p> <ul style="list-style-type: none"> • The Flex-Pro Pump's motor speed is linear over the entire 1% to 100% adjustment range. • Output versus pressure is nearly linear in all models. Larger tubes exhibit greater losses. • For optimum tube life, specify the pump to operate at the lowest possible RPM and pressure. | | | | | | | | |

Chemical Resistance of Tubing:

Flex-A-Prene® and Norprene® Tubing

Meets FDA criteria for food | Excellent chemical resistance

| | | | |
|--|--|--|--|
| Alcohol general Aluminum Sulfate (Alum) Ammonium chloride Ammonium hydroxide Ammonium Sulfate (LAS) Benzyl alcohol Bleach Brine solutions Calcium hypochlorite 20% | Ethylene glycol Ferric chloride Ferric nitrate Ferric sulfate Ferrous chloride - 43% in water Ferrous sulfate Fluosilicic Acid (up to 25%) Formic acid Glucose | Hydrochloric acid 33% Hydrocyanic acid Hydrogen peroxide Hypochlorous acid Iodine Magnesium chloride Magnesium sulfate Phosphoric acid Plating solutions | Potassium hydroxide Potassium permanganate Propylene glycol Sodium hydroxide 50% Sodium Bisulfite Sodium Hypochlorite 12.5% Sodium sulfide Sulfuric acid up to 50% Tannic acid |
|--|--|--|--|

Norprene® Chemical Tubing - Ultra smooth plasticizer-free bore (inner liner)

Meets FDA criteria for food | Superb chemical resistance

| | | | |
|--|--|---|---|
| Ferrous Chloride (up to 40%) Fluoboric Acid (up to 48%) Fluosilicic Acid (up to 25%) Hydrofluoric Acid (up to 48%) Nitric Acid (up to 71%) | Phosphoric Acid (up to 85%) Potassium Hypochlorite (up to 70%) Sodium Phosphate (up to 30%) Sulfuric Acid (up to 98%) | Bases Salts Ketones Alcohols Isobutyl Alcohol | Applications: Ink and solvent production Battery acid filling Specialty chemical production / processing Sensitive fluid transfer |
|--|--|---|---|

Tygothane® Tubing

Meets FDA criteria for food | Resistant to oils, greases and fuels


| | | | |
|--|--|---|--|
| Cyclohexane Diesel Fuel Fatty acids Gasoline Heptane Hexane | Kerosene Lard Mineral spirits Soap solutions Turpentine Polymer | Oils: ASTM reference No.1,2,3 Castor Coconut Fuel | Oils: Linseed Lubricating Mineral |
|--|--|---|--|

Norprene® is a registered trademark of Saint-Gobain.
Tygothane® is a registered trademark of Saint-Gobain.
Note: Data shown at 72 degrees F.

FLEX-PRO® Peristaltic Metering Pump

Engineering and Technical Data

Dimensions:

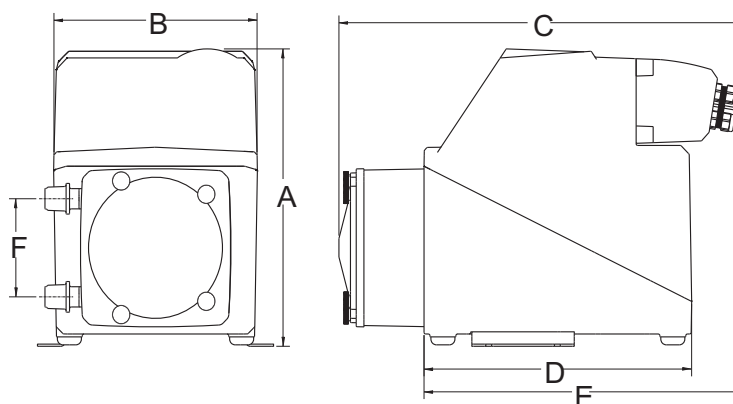

| A2 Series | | |
|-----------|---------|------|
| Dim | Inches | cm |
| A | 10-1/4" | 26 |
| B | 7-1/2" | 19 |
| C | 14" | 35.6 |
| D | 9-1/2" | 24.1 |
| E | 11" | 27.9 |
| F | 3-3/8" | 8.6 |

Model Number Matrix:

| Flex-Pro Model Number | | | | | | | | | | |
|--|---|-----------|--|----------|----------|-----------|----------|----------|-----------|----------------------------|
| A2 | Flex-Pro Peristaltic Metering Pump | | | | | | | | | |
| Series Control Options | | | | | | | | | | |
| F | Single manual output control (manual/local control only) | | | | | | | | | |
| V | Multiple automatic input output control and alarm modes (remote control) | | | | | | | | | |
| Maximum Motor Speed | | | | | | | | | | |
| 2 | 130 RPM (maximum rotor rotation speed) | | | | | | | | | |
| Power Cord (operating voltage requirement 96VAC to 264VAC) | | | | | | | | | | |
| 4 | 115V / 60Hz, power cord NEMA 5/15 plug (US) | | | | | | | | | |
| 5 | 230V / 60Hz, power cord NEMA 6/15 plug (US) | | | | | | | | | |
| 6 | 220V / 50HZ, power cord CEE 7/VII plug (EU) | | | | | | | | | |
| 8 | 240V / 50HZ, power cord AS 3112 plug (Australia/New Zealand) | | | | | | | | | |
| X | No Power Cord | | | | | | | | | |
| Inlet/Outlet Connection Size, Connection Type, Connection Material | | | | | | | | | | |
| S | 3/8" OD x 1/4" ID Tube Compression Fitting, Natural PVDF (Kynar) | | | | | | | | | |
| M | 1/2" Male NPT Fitting, Natural PVDF (Kynar) | | | | | | | | | |
| B | 1/2" Hose Barb, Natural PVDF (Kynar), Flex-A-Prene® only | | | | | | | | | |
| C | 1/2" - 3/4" Tri-clamp, Natural PVDF (Kynar), Flex-A-Prene® only | | | | | | | | | |
| Q | Quick Disconnect, Natural PVDF (Kynar), Flex-A-Prene® only | | | | | | | | | |
| Pump Tube Material, Pump Tube Size, operating flow range | | | | | | | | | | |
| ND | Norprene® .075 ID, 0.02 to 1.7 GPH | TH | Norprene® Chemical .250 ID, 0.15 to 14.9 GPH | | | | | | | |
| NEE | Flex-A-Prene® .093 ID, 0.045 to 4.5 GPH | GE | Tygothane® .125 ID, 0.04 to 4.0 GPH | | | | | | | |
| NGG | Flex-A-Prene® .187 ID, 0.172 to 17.2 GPH | GG | Tygothane® .187 ID, 0.09 to 9.3 GPH | | | | | | | |
| Options (leave this blank for standard model with left facing pump head inlet/outlet) | | | | | | | | | | |
| 1 | TI40-6V Threadless injection check valve, replaces A-014NK-6A threaded check valve | | | | | | | | | |
| 2 | C340A Foot valve, replaces standard C-342 inlet strainer (no check valve) | | | | | | | | | |
| 3 | 4-20 mA analog output (requires "V" series control) | | | | | | | | | |
| R | Right facing pump head, input / output (Left facing fluid input / output is standard) | | | | | | | | | |
| D | Down facing pump head, input / output (Left facing fluid input / output is standard) | | | | | | | | | |
| C1 | Communications Interface - Profibus DPV1 - (requires "V" series control) | | | | | | | | | |
| C2 | Communications Interface - Modbus RTU - (requires "V" series control) | | | | | | | | | |
| C3 | Communications Interface - Modbus TCP - (requires "V" series control) | | | | | | | | | |
| C4 | Communications Interface - Industrial EtherNet/IP - (requires "V" series control) | | | | | | | | | |
| C5 | Communications Interface - Profinet RT I/O - (requires "V" series control) | | | | | | | | | |
| A2 | V | 2 | 4 | - | S | NH | - | R | C5 | Sample Model Number |

Features list:

| Features: | |
|--|--|
| TFD (Tube Failure Detection) System Alarm | |
| FVS (Flow Verification System) Alarm * | |
| Motor reverse (rotor reversible) | |
| Three position pump head rotation | |
| Output: One, 6 amp alarm relay | |
| Output: Analog 4-20mA (optional) | |
| Input: One, dry contact closure 6-24 Vdc powered loop for remote start / stop | |
| Input: Remote speed control via 4-20mA, 0-10VDC, high speed digital pulse, contact closure pulse | |
| Optional: remote communications, Profibus DPV1, Modbus RTU, Modbus-TCP, EtherNet/IP, and Profinet RT I/O. | |
| Display: Motor speed, Input signal values, Tube Failure Detection (TFD) system and Flow Verification System (FVS) alarm status | |
| Available Operating Modes: | |
| Manual (local): speed adjustment | |
| Remote input: 4-20mA | |
| Remote input: high speed frequency (pulse) input | |
| Remote input: pulse triggered batch dispensing | |
| Optional Communications Commands List | |
| Control Commands | Available Pump Status Data |
| Start/Stop | Motor run/stop status |
| Set motor speed (0.5 to 100.0%) | Priming status |
| 60 second prime at maximum speed | Pump head Cover on/off status |
| Lock and unlock any touch pad button | Status of each local touch pad button |
| Clear/reset general alarm | Motor direction |
| Reset pump tube timer | Current operating mode selection |
| Set operating mode | TFD (Tube Failure Detection) system status |
| | FVS (Flow Verification System) status |
| | General alarm status |
| | Alarm output relay status |
| | Current pump operating speed |
| | Current pump tube timer accumulated hours |
| | Current analog input signal value in mA |
| | Current frequency input signal value in Hz |
| | Current analog output signal value in mA |
| | Pump model and software version |

* Requires Micro-Flo Sensor sold separately

