
INTG 6

GRIpumps.com



INTG6 Series • Performance @ Maximum Flow						
Voltage	Flow (GPM)	Flow (L)	Ttl. Hd. (Ft)	Ttl. Hd. (PSI)	Ttl. Hd. (BAR)	Ttl. Hd. (M)
48vdc	15.00	56.30	25.33	10.98	0.76	7.72
24vdc	12.00	45.00	34.81	15.09	1.04	10.61

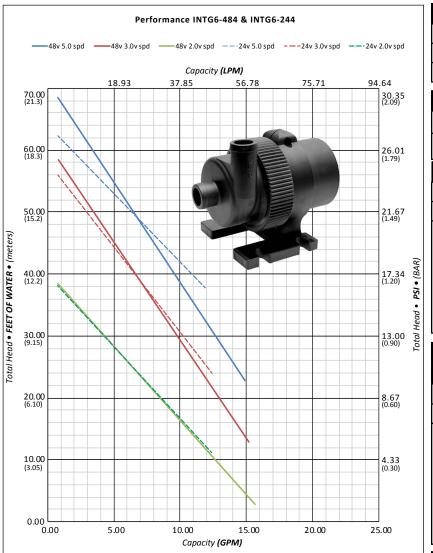

Note: Testing performed in a controlled laboratory environment. Actual performance may vary (+) or (-) 10% from the information shown.

Do Not Run Pumps Dry. Pumps must be in a continuous flooded suction environment.

Specifications		
Maximum System Pressure: 75 psi		
Approximate Weight (w/ external box): 4 lbs (1814.37 grams)		
Ports: 1" MHB		

Materials In Contact With Solution				
Body: PPS	Housing: PPS	Static O-Ring:		
Impeller: PPS	Pump Shaft: Ceramic	EPDM, FKM (upon request)		

Motor Specifications

Motor: Integrated, Brushless DC

Supply Voltage: 12-24, 48 VDC

Electronics Maximum Power: 200 Watts

To protect the control board, each Integrity Series pump will be issued with a Maximum Power limit (Watts). To stay within this limit, the recommended fuse size (Amps) will be based on the voltage supplied. (Watts = Voltage X Amps)

Control Options

- Direct Supply Voltage: Speed of the pump determined by the voltage supplied
- Analog: 0-5v DC Signal
- Digital: PWM
- CAN-Bus: Option available
- Tachometer: Feedback option available

Maximum Fluid Temperature Rating Chart			
Controller Position	Maximum Fluid Temp Rating		
Separate from pump	221°F (105°C)		
Within pump's housing	Not available		
Various factors influence the recommended maximum temperature rating. These factors play a role in determining the pump's life and applied warranties. In some applications, a higher maximum fluid temperature rating may be warranted.	Factors influencing maximum temperature rating include, but are not limited to: • Starting temperature of fluid in system • Ambient temperature • Required performance, application's specifications • Run time		

Optional Agency Approvals	RoHS/REACH
Contact GRI	Many GRI pumps are RoHS & REACH compliant. For declarations by specific model numbers, please contact GRI.


IP (Ingress Protection)

IP68: No ingress of dust, protection against continuous water immersion.*

* Upon request only. Minimum quantities may be required.

GRIpumps.com



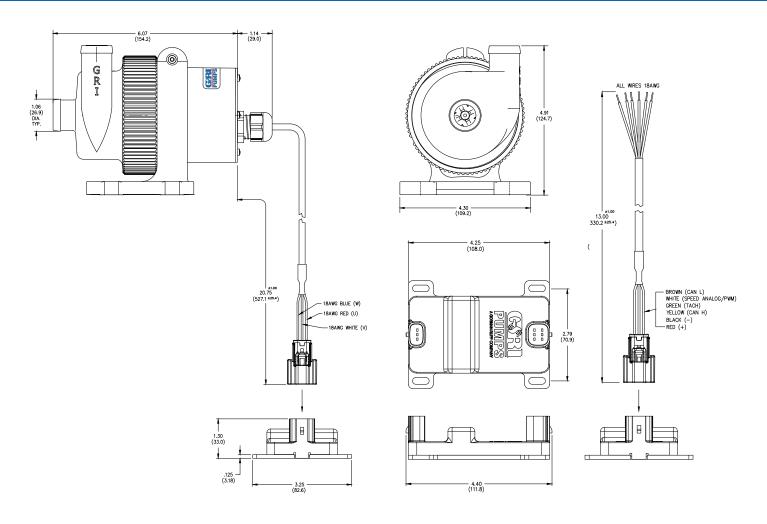

INTG6 Series Typical Dimensional Drawing. OEM options are available. Please contact GRI to discuss.

Integrity Series Pumps are designed and manufactured specifically for OEM customization. If you don't immediately find a pump that meets your exact requirements, our dedicated Pump Team is ready to work with you in developing a solution specific to your application.

Model (0-RING)	Voltage (VDC)	Speed Control	Lead Wires	Max Flow GPM (LPM)	Max Head Ft. (PSI) (m)	Connections Inlet/Outlet (Inches)
INTG6-244 (EPDM)	12-24 Published performance based on 24v	Analog (0-5v Nominal) Digital (PWM) optional	4 wires (+), (-), Speed Control, Tach	12.00 (45.0)	59.00 (25.5) (18.0)	1" MHB
INTG6-484 (EPDM)	48	Analog (0-5v Nominal) Digital (PWM) optional	4 wires (+), (-), Speed Control, Tach	15.00 (56.30)	70.00 (30.3) (21.3)	1" MHB
Connectors: MHB = Male Hose Barb O-Ring Material: EPDM = Ethylene Propylene Diene Monomer, FKM = Fluoroelastomer (Available on request)						