

**Griffco Valve Inc.**

188 Creekside Dr  
Amherst, NY 14228 USA  
Phone: +1 716 835-0891  
Fax: +1 716 835-0893  
[sales@griffcovalve.com](mailto:sales@griffcovalve.com)  
[www.griffcovalve.com](http://www.griffcovalve.com)

**G-SERIES****BACK PRESSURE VALVES**

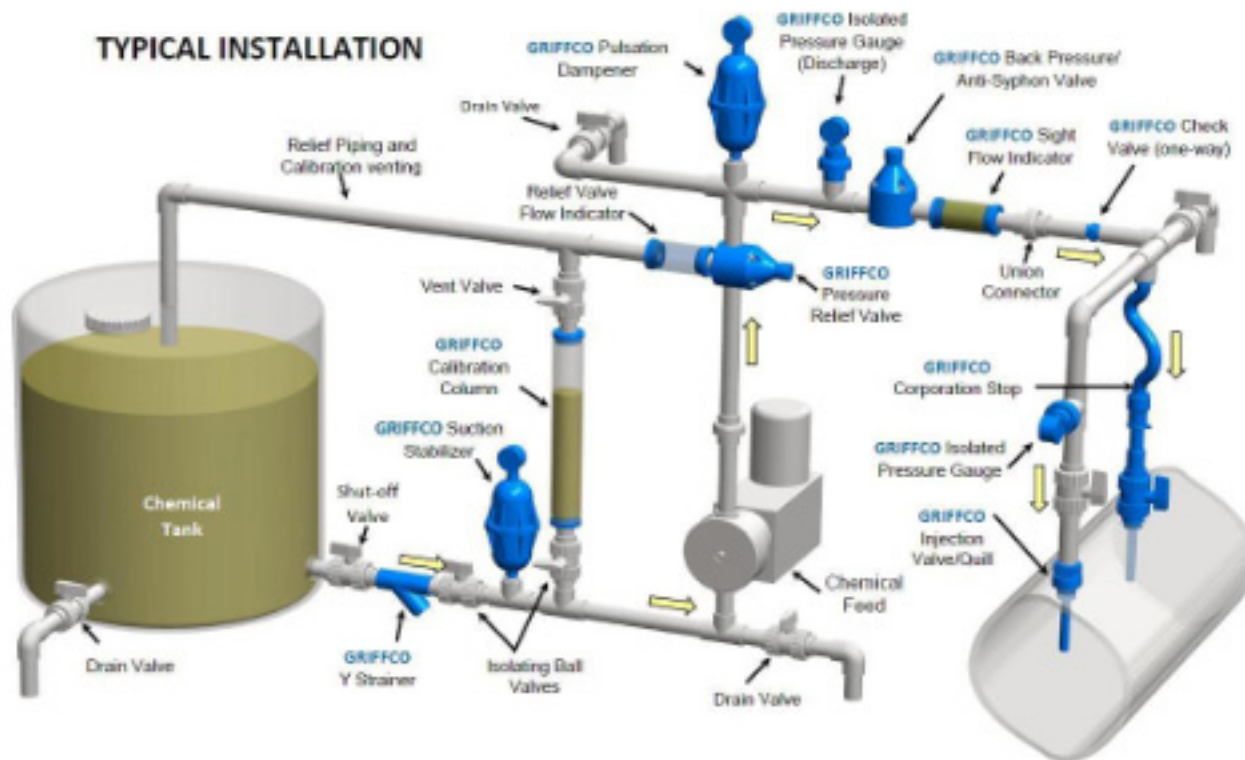
Griffco G-Series diaphragm back pressure valves are designed to enhance the performance of chemical feed systems by applying a continuous back pressure to the chemical feed pump, while also acting as an anti-siphon valve. Robust construction ensures reliability in the rigorous service of municipal and industrial applications. Wetted materials include: PVC, CPVC, PP, PVDF, PTFE, Halar, 316 SS, A20 and Hast. C. Available sizes: 1/2" - 4".

**Features:**

- Molded Noryl Top
- High Reliability/Low Cost
- Molded PTFE/EPDM Diaphragm
- Adjustable Relief Settings
- Optional Pressure Rated Valves
- Anti-Siphon Function
- Robust, Machined Construction
- Tamper Resistant Adjustment Screw
- Wide Range of Materials

**Operation:**

Griffco diaphragm back pressure valves apply positive discharge pressure to a metering pump system to prevent siphoning and eliminate varying dosage rates caused by fluctuating downstream pressure. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded, the diaphragm is forced up and chemical flows through the valve to the injection point. The valves are preset for 50 psi, however they are field adjustable from 10 - 150 psi via the adjustment screw. Installation should be as close to the injection point as possible to prevent chemical line drainage and it is most important that all chemical system equipment such as pulsation dampeners and pressure gauges are between the pump and back pressure valve.

**TYPICAL INSTALLATION**

CALL 1 - 800 - GRIFFCO

Bulletin # BPG1003-2017-01