


MODEL DC-332.C DRIVE

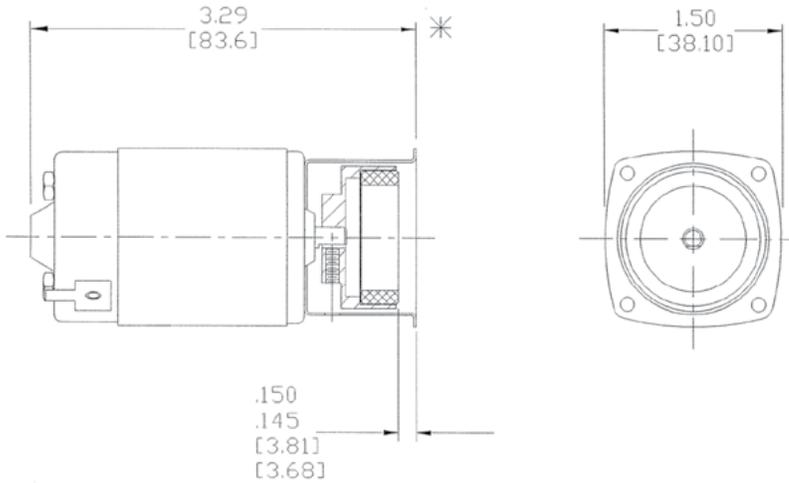

MOTOR SPECIFICATIONS

TYPE

- Permanent Magnet

VOLTAGE

- 24 VDC

AMPERAGE

- .20 AMPS Maximum at no load; 5.75 AMPS Maximum at stall.

NO LOAD SPEED

- 7350 RPM Minimum

TORQUE

- 14.5 OZ. IN. Minimum at stall.

BEARING SLEEVE, ENDPLAY


- .015 MAX.

- Shaft rotation is CW Looking at Mounting with (+) on #1 Terminal.

- Male Spade Terminals, Tin plated

AVERAGE TESTED PERFORMANCE

Speed vs. Torque

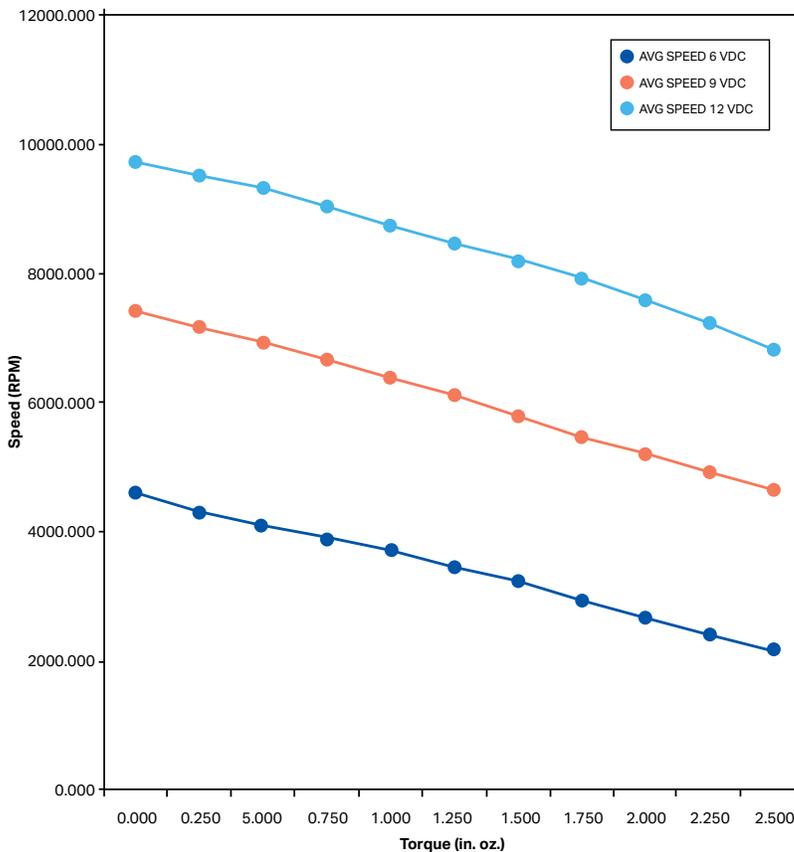

WIRING CONNECTIONS

