



SETHCO

FULL LINE BULLETIN

Sethco offers a comprehensive line of horizontal and vertical centrifugal pumps engineered for durability and performance in the most demanding environments. With flow capacities up to 250 GPM (57 m³/hr), our pumps are constructed from high-strength thermoplastics and stainless steel to ensure long-lasting corrosion resistance.

Backed by over 60 years of industry expertise, Sethco pumps are ideal for filtration, recirculation, and fluid transfer applications across industries such as metal finishing, electronics, chemical processing, water treatment, power generation, and pharmaceuticals.



MARKETS

- Aerospace
- Aquaculture
- Aquariums
- Automotive
- Chemical Process
- Electronics
- Laboratory
- Metal Finishing
- Municipal
- Painting
- Pharmaceutical
- Photo Processing
- Pulp and Paper
- Semiconductor

APPLICATIONS


- Acids
- Bleaches
- Caustics
- Chemical Transfer
- Cleaning / Mixing
- Filtration
- Ideal for OEMs
- Processing
- Recirculation
- Reverse Osmosis
- Scrubbers
- Seawater
- Solvents
- Wastewater

SEALLESS DRUM PUMPS

P90 SERIES DRUM PUMPS

High powered sealless drum pumps designed to handle aggressive, corrosive, and hazardous fluids. All drum pumps are in stock and available for immediate delivery.

- Capacities to 35 GPM (135 LPM)
- Heads to 39 feet (12 m)
- Plastic tube lengths in 10 inch (254 mm) increments from 30 inches (762 mm) to 60 inches (1,524 mm)
- 316SS tube length 40 inch (1,016 mm)
- Air motors suitable for hazardous locations when used with 316SS pumps
- Polypropylene, Kynar or 316SS construction
- Constant and variable speed motor available
- Pump and motor sold separately

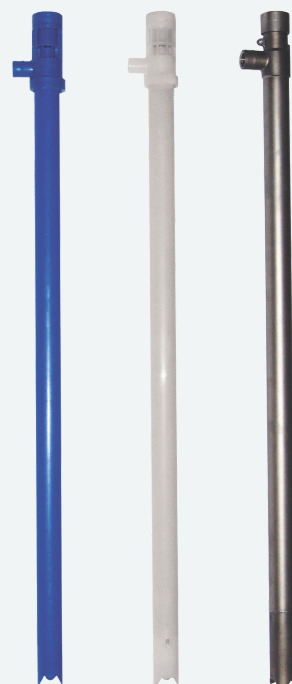

MAGNETIC DRIVE HORIZONTAL CENTRIFUGAL PUMPS

PM/KM MAGNETIC DRIVE END SUCTION PUMPS

Leakproof, seal-less design engineered to deliver performance, durability and ease of maintenance without leaks or emissions. 24 sizes available in Polypropylene or Kynar construction for optimum corrosion-resistance.


500 SERIES

- Capacities to 30 GPM (114 LPM) and heads to 38 feet (12 m)
- Motors from $\frac{1}{4}$ to $\frac{3}{4}$ hp (0.19 to 0.56 kW)



1000 SERIES

- Capacities to 96 GPM (365 LPM) and heads to 80 feet (24 m)
- Motors from $\frac{1}{2}$ to 3 hp (0.37 to 2.2 kW)

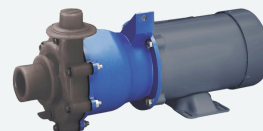

2500 SERIES

- Capacities to 250 GPM (57 m³/hr) and heads to 94 feet (29 m)
- Motors from 3 to 10 hp (2.2 to 7.5 kW)




PMSP/KMSP MAGNETIC DRIVE SELF-PRIMING PUMPS

Leakproof, seal-less design combined with excellent priming times. Substantial parts interchangeability with PM/KM versions. 24 sizes available in Polypropylene or Kynar construction for optimum corrosion-resistance.


500 SERIES

- Capacities to 27 GPM (102 LPM) and heads to 36 feet (11 m)
- Motors from $\frac{1}{4}$ to $\frac{3}{4}$ hp (0.19 to 0.56 kW)

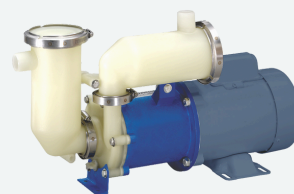


1000 SERIES

- Capacities to 76 GPM (288 LPM) and heads to 66 feet (20 m)
- Motors from $\frac{1}{2}$ to 3 hp (0.37 to 2.2 kW)

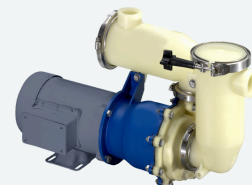

2500 SERIES

- Capacities to 230 GPM (52 m³/hr) and heads to 93 feet (28 m)
- Motors from 3 to 10 hp (2.2 to 7.5 kW)

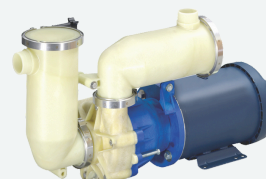

VERTICAL CENTRIFUGAL SUMP PUMPS

UD/UV SERIES SUMP PUMPS

Built for demanding environments, this corrosion-resistant pump offers robust construction, flexible lubrication, and solid-handling performance.

- Capacities to 220 GPM (50 m³/hr)
- Heads to 135 feet (41 m)
- Lengths from 2 to 10 feet (0.6 to 3 m)
- Motors from ½ to 15 hp (0.37 to 11 kW)
- CPVC or PVC pump construction
- 316SS, Carp-20, Titanium or Hastelloy-C shafts
- Internal, external or bypass bearing lubrication
- Custom solutions such as duplex arrangements available upon request



CANTILEVER DESIGN SEALLESS PUMPS

ZDX/ZKX SERIES IN-TANK OR OUT-OF-TANK PUMPS

Bearing-free, seal-less cantilever pump designed for in-tank and out-of-tank use. Built for heavy duty pumping of acid and alkaline solutions.

- 17 sizes available
- Capacities to 140 GPM (530 LPM)
- Heads to 109 feet (33 m)
- Motors from 1/20 to 5 hp (0.04 to 5.6 kW)
- CPVC and Kynar construction

