

# **Mag-Drive Pumps**






#### **Features**

- Leak-proof, magnetic drive
- Eliminates seals to reduce friction wear
- High temperature capacity
- Threaded pump connections

### **Applications**

- Toxic or Explosive Fluids
- Aggressive Chemicals
- Biodiesel Production
- Water Treatment
- Galvanic Processes, Surface Treatments
- Scrubber Applications
- Pharmaceutical Industry

## **Cross Section – Magnets**



### HP

#### **Pump Models**


**HP75MDSS** – 316 Stainless Steel **HP100MDSS** – 316 Stainless Steel

# **Standard Specifications**

- HP75MD Discharge 3/4" FNPT, Suction 3/4" FNPT
- HP100MD Discharge 1" MNPT, Suction 1" FNPT
- Maximum Impeller Diameter: 6.00"
- Impeller Material: 316SS
- Motor: NEMA C Face
- O-rings: Viton
- Bushings: Carbon Graphite
- Thrust Washers: Ceramic
- Magnets: Samarium Cobalt

Note: Contact factory for additional options

#### Performance Curve – 60 Hz

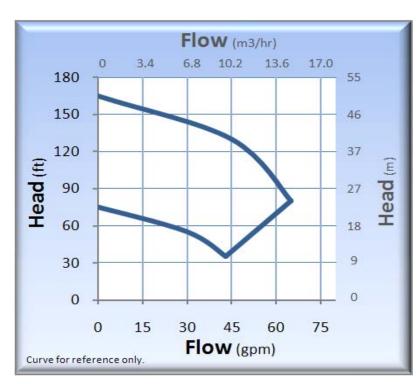

Rev. Date: May 2012


# **HP** (MAG DRIVE)

Technical Information	
Max Flow	<b>65 GPM</b> (15 m3/hr)
Max Head	<b>165 feet</b> (50 m)
Minimum Flow	<b>0.5 GPM</b> (0.12 m3/hr)
Max Working Pressure	<b>300 PSI</b> (21 bar)
Max Temp.	<b>350°F</b> (177°C)*

<sup>\*</sup> Temperature limits will vary depending on O-ring material and type of liquid being pumped.

Materials of Construction	
HPMD	SS
Volute	316 Stainless Steel
Impeller	316 Stainless Steel
Bracket	316 Stainless Steel
Fasteners	316 Stainless Steel
O-ring	Viton (STD), Teflon, Buna, EPR, Neoprene, Kalrez, & Fluoro-Silicon
Shaft	316 Stainless Steel (STD), Tungsten Carbide Coated
Bushings	Carbon (STD), Silicon Carbide
Thrust Washers	Ceramic (STD), Silicon Carbide
Magnet Cup	316 Stainless Steel
Magnets	Samarium Cobalt

### **Dimensions** (HP Mag-Drive)

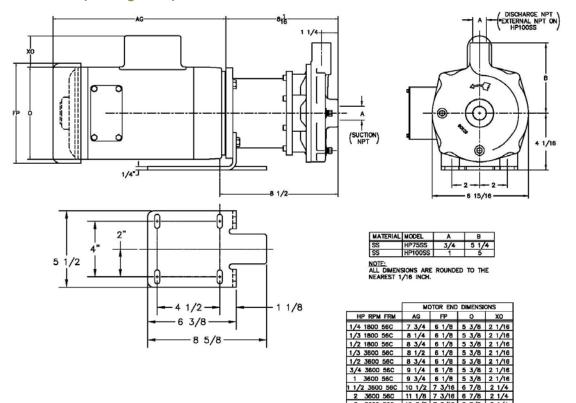

#### Note:

Motors above 3 HP require VFD or soft starter.

Motor dimensions are for reference only and will vary by model and make.

Contact factory for special pump configurations, same day, and next day delivery options.



21775 Eighth Street East Sonoma, CA 95476-0329 MAIN (707) 938-8441 TOLL FREE (800) 345-7867 FAX (707) 938-0764

E-mail: <a href="mailto:sales@pricepump.com">sales@pricepump.com</a>
Website: <a href="mailto:www.pricepump.com">www.pricepump.com</a>





Rev. Date: May 2012