


STANDARD FEATURES:

- PAINTED AIR MOTOR WITH MUFFLER
- ADJUSTABLE BRIDGE MOUNT
- 316SS WETTED PARTS
- 3/4" X 36" FMB SHAFT
- SINGLE OR DUAL MARINE IMPELLERS WITH SET SCREW ATTACHMENT
- SPEED CONTROL VALVE

AIR CONSUMPTION	
1 HP	40 CFM @ 80 PSI
2 HP	60 CFM @ 70 PSI
3 HP	90 CFM @ 100 PSI

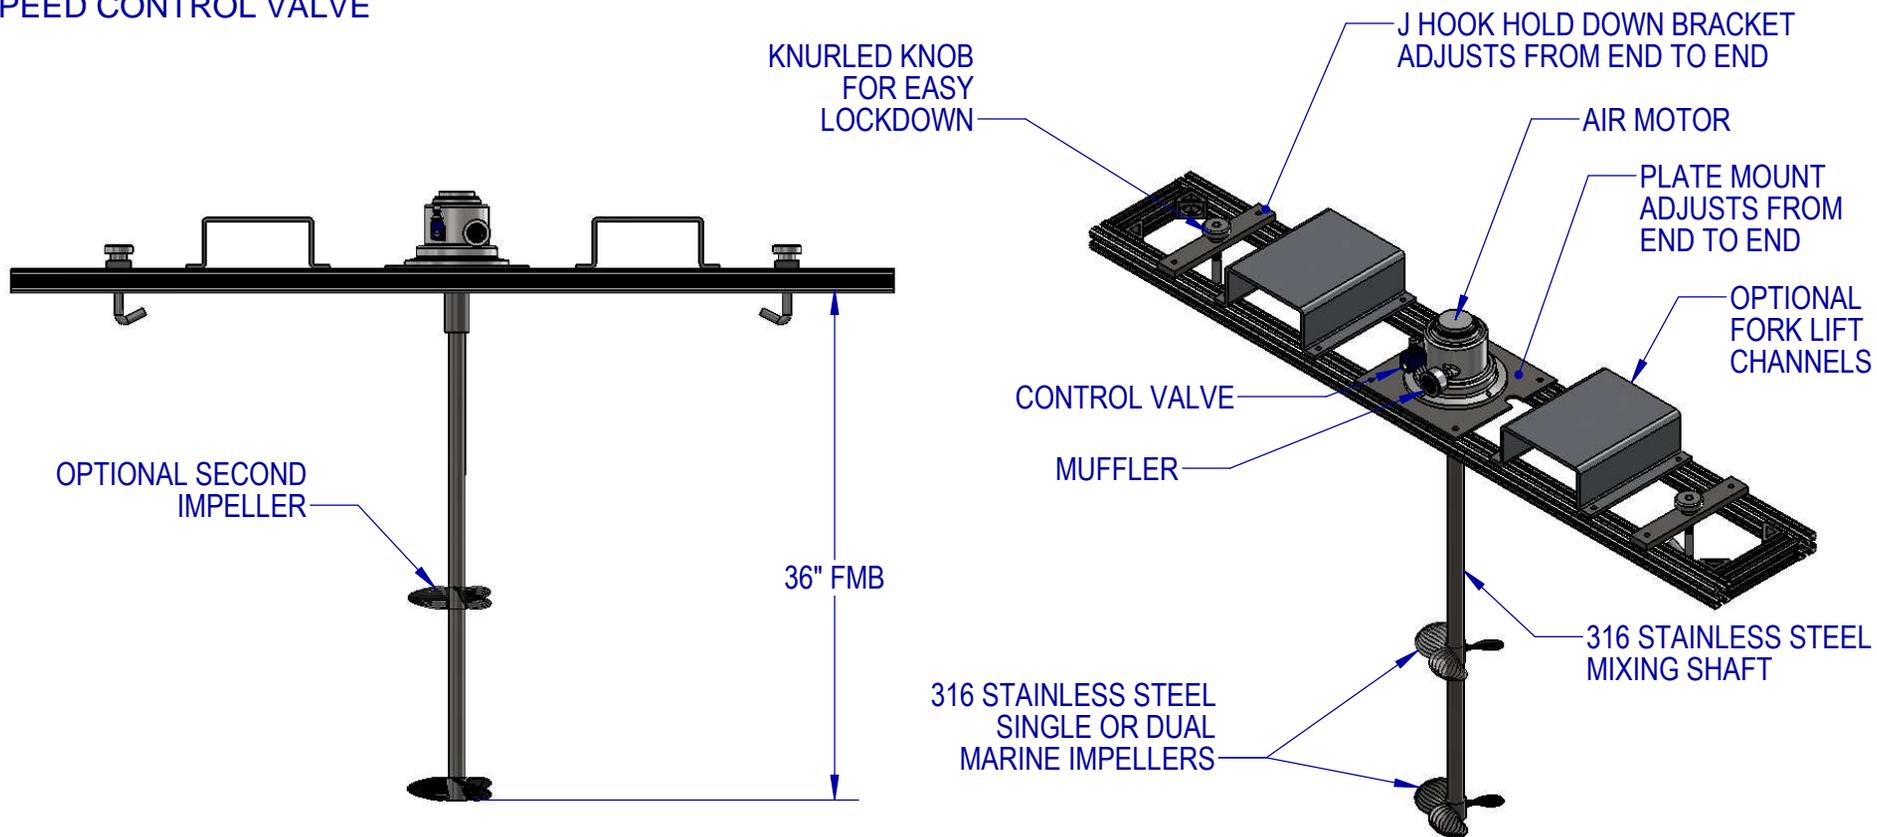

OPTIONS:

- FILTER/REGULATOR/LUBRICATOR (FRL)
- 32 Ra FINISH ON ALL WETTED PARTS
- FORK LIFT CHANNELS
- TOTE CAP WITH VITON FLOATING SEAL

BRIDGE MOUNT TOTE MIXERS MOUNT TO CAGE STYLE TOTES UP TO 52" WIDE

EST WT: 44-60 LBS (DEPENDING ON HP AND OPTIONS)

	NAME	DATE
DRAWN	JDF	6/10/13
CHECKED	PIC	6/10/13

Fusion Express
Mixing Equipment

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FUSION FLUID EQUIPMENT LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FUSION FLUID EQUIPMENT LLC IS PROHIBITED.

TITLE:
**BRIDGE MOUNT TOTE MIXER
DIRECT DRIVE AIR MOTOR**

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
NO TOLERANCE IS IMPLIED.
DO NOT SCALE DRAWING

WHILE FUSION FLUID EQUIPMENT LLC STRIVES TO MAINTAIN THE INTEGRITY OF A DESIGN AS APPROVED, FUSION FLUID EQUIPMENT LLC RETAINS THE RIGHT TO MAKE MODIFICATIONS DURING THE MANUFACTURING PROCESS TO IMPROVE FIT, FORM, AND FUNCTION OF THE DESIGN WITHOUT CUSTOMER NOTIFICATION OR CONSENT.

SIZE	DWG. NO.	REV
A	SALES-BDA-#T	A
SCALE: 1:12	WEIGHT:	SHEET 1 OF 1