



11212 A McCormick Road
Hunt Valley, MD 21031


Data Sheet, DEF-52H33S Hose Reel (Advantage Plus Series)

Low Pressure (210 PSI), powder-coated, single-arm reel,
3/4" x 33' delivery hose

- HOSE:
 - Working pressure, 210 PSI maximum
- SHIPPING:
 - One box
 - Weight: 53 pounds
 - Dimensions: 22.5" x 21" x 9"
- COMPATIBILITY:
 - DEF
- MAXIMUM MOUNTING HEIGHT:
 - 14' above floor
- MOUNTING BASE HOLE PATTERN:
 - 3.5" x 7.5"
 - Four holes for 3/8", Grade 5 hardware
- THREADS:
 - Swivel: 3/4" BSPT
 - Delivery Hose: 3/4" BSPT
- WARRANTY (*Defects in material and workmanship, non-wear parts*):
 - One year
- ACCESSORIES:
 - DEF-31 hose, 3/4" ID, order by the foot
 - DEF-51A stainless steel hose clamps
- INSTALLATION RECOMMENDATIONS:
 - Two parallel runs of, Kindorf Strut Channel affixed to steel roofing supports. Four each, 3/8", Grade 5 bolts, flat/lock washers and Kindorf Spring Nuts *per Kindorf pair*
 - Affix reel to Kindorf pair. Four each, 3/8", Grade 5 bolts, flat/lock washers and Kindorf Spring Nuts
 - Typical mounting bolt specifications: Grade 5, 3/8-16, 1-1/2" (length as required)
 - Keep reel and associated plumbing away from heat sources
 - Plumbing, 3/4" diameter, rubber hose, stainless steel tubing or plastic tubing
 - Three wraps Teflon tape followed by pipe dope



A	B	C	D	E	Mount L-M
8-7/16"	21-1/2"	20-5/8"	5-3/4"	9"	3-1/2" x 7-1/2"

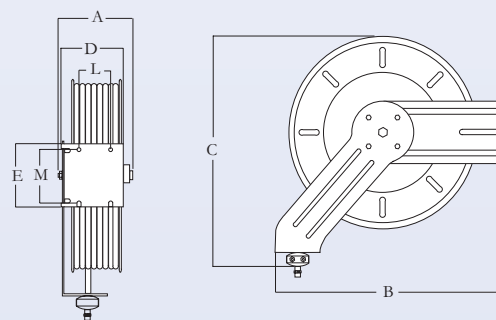

14' maximum mounting height